

FILE NAME: C:\Users\jnilsson\Documents\Congress Heights Recreational Center_STRUCTURE.YEQQ.M
USER NAME: 2/16/2026 3:43:47 PM
DATE STAMP:

STRUCTURAL NOTES

1. GENERAL

- A. THE BUILDING IS DESIGNED UNDER THE PROVISIONS OF THE 2015 INTERNATIONAL BUILDING CODE AND ASCE 7-10 AND THE DCMR-12A 2017 AMENDMENTS.
- B. THE FOLLOWING LOADS WERE USED IN THE DESIGN:
- | | |
|---|--------------------------|
| BUILDING RISK CATEGORY | III |
| FLOOR LIVE LOAD | |
| PUBLIC AREAS/OFFICES | 100 PSF |
| CORRIDORS | 100 PSF |
| STAIRS AND EXITS | 100 PSF / 300 LB PT LOAD |
| SLAB ON GRADE STORAGE AREAS AND EQUIPMENT ROOMS | 125 PSF |
| ROOF LIVE LOAD | |
| MINIMUM UNIFORM ROOF LIVE LOAD | 30 PSF / 300 PT LOAD |
| ROOF SUPERIMPOSED DEAD LOAD ALLOWANCES | |
| VEGETATIVE ROOF (4-INCH DEEP EXTENSIVE GREEN ROOF SYSTEM) | 27 PSF |
| FUTURE PV ALLOWANCE | 10 PSF |
- *NOTE: ROOF DEAD LOAD ALLOWANCES INCLUDE THE WEIGHTS OF GREEN ROOF ASSEMBLIES (PLANTS, GROWING MEDIA, FILTERS, DRAINS AND AGGREGATES), PAVERS AND PEDESTALS, DECKING MATERIAL AND OVER-BUILT DECK STRUCTURE. ALLOWANCES DO NOT INCLUDE WEIGHTS OF INSULATION ROOFING, OR THE SELF WEIGHT OF THE STRUCTURE.
- | | |
|----------------------------------|--------|
| ROOF SNOW LOAD | |
| GROUND SNOW LOAD (Pg) | 25 PSF |
| FLAT-ROOF SNOW LOAD (Pf) | 20 PSF |
| SNOW EXPOSURE FACTOR (Ce) | 1.0 |
| SNOW LOAD IMPORTANCE FACTOR (Is) | 1.1 |
| THERMAL FACTOR (Ci) | 1.0 |
- NOTE: DRIFTING SNOW LOADS – SEE PLAN
- | | | |
|-----------------------------------|--------------|-----------|
| WIND LOAD | | |
| WIND SPEED (3-SECOND GUST) | | |
| Vult | 120 MPH | |
| Vasd: (0.77"VULT) | 92.4 MPH | |
| WIND EXPOSURE | B | |
| INTERNAL PRESSURE COEFFICIENT | +0.18, -0.18 | |
| COMPONENTS AND CLADDING WIND LOAD | | |
| EFFECTIVE WIND AREA | ZONE | PRESSURE |
| 10 FT.'2 | 4 | +23.7 PSF |
| 10 FT.'2 | 4 | -25.7 PSF |
| 10 FT.'2 | 5 | +23.7 PSF |
| 10 FT.'2 | 5 | -31.6 PSF |
- EARTHQUAKE DESIGN
- | | |
|------------------------------------|---------|
| SEISMIC IMPORTANCE FACTOR (Ie) | 1.00 |
| SEISMIC DESIGN CATEGORY | B |
| SITE CLASSIFICATION | D |
| SEISMIC RESPONSE COEFFICIENTS | |
| Ss | 0.118 |
| S1 | 0.051 |
| Sds | 0.126 |
| Sd1 | 0.082 |
| DESIGN BASE SHEAR | 58 KIPS |
| SEISMIC-FORCE RESISTING SYSTEM PER | |
| ASCE 7-10 TABLE 12.2-1 | TYPE H |
| R | 3 |
| Cd | 3 |
| Cs | 0.052 |
| TL | 8 |
| ANALYSIS METHOD | ELFP |
- | | |
|--------------------------|-------------------------|
| HANDRAIL AND GUARD LOADS | |
| HANDRAIL AND GUARD | 50 PLF / 200 LB PT LOAD |
| INTERMEDIATE RAIL | 50 LB PT LOAD |
- C. SEE ARCHITECTURAL DRAWINGS FOR ANGLES, CLIPS, PLATES, ETC., AND OTHER MISCELLANEOUS ITEMS. VERIFY AND COORDINATE ALL FRAMES, OPENINGS, ETC. WITH THE MECHANICAL AND ELECTRICAL CONTRACTORS.
- D. SUBMIT SHOP DRAWINGS FOR THE FOLLOWING ITEMS. SUBMITTALS INCLUDE BUT MAY NOT BE LIMITED TO:
- CONCRETE MIX DESIGN
 - REINFORCING STEEL
 - STRUCTURAL STEEL
 - STRUCTURAL STEEL CONNECTIONS (PE SEAL)
 - OPEN WEB STEEL JOISTS w/ CERTIFICATION LETTER
 - METAL DECKING
 - PRE-ENGINEERED BUILDING COMPONENTS
 - LIGHT GAGE METAL FRAMING w/ FINAL CERTIFICATION LETTER
- DO NOT USE CONTRACT DRAWINGS AS A BASE FOR SHOPS. REVIEW IS LIMITED TO DESIGN CONFORMANCE. CONTRACTOR IS RESPONSIBLE FOR DIMENSIONS.
- E. CONTRACTOR SHALL COORDINATE WITH THE QUALIFIED AGENCY RETAINED BY THE OWNER TO PERFORM INSPECTION AND TESTING. INSPECTIONS REQUIRED INCLUDE, BUT MAY NOT BE LIMITED TO:
- SOILS AND FOUNDATIONS
 - CONCRETE
 - STRUCTURAL STEEL
 - MASONRY
 - LIGHT GAGE METAL FRAMING
2. EARTHWORK
- A. FOUNDATIONS ARE DESIGNED TO BEAR ON ENGINEERED FILL OR NATURAL SOIL WITH A CAPACITY OF 4,000 PSF, BASED ON RECOMMENDATIONS IN THE ECS GEOTECHNICAL REPORTS DATED JUNE 5, 2020, JULY 10, 2025 AND ADDENDUM REPORT DATED AUGUST 15, 2025. THIS VALUE IS TO BE VERIFIED IN THE FIELD BY THE BUILDING INSPECTOR OR A QUALIFIED TESTING AGENCY.
- B. BOTTOM OF ALL EXTERIOR FOOTINGS SHALL BE A MINIMUM OF 2 FOOT-6 INCH BELOW FINISH EXTERIOR GRADE. WHERE REQUIRED, STEP FOOTINGS IN RATIO OF 2 HORIZONTAL TO 1 VERTICAL.
- C. COMPACTED BACKFILL BELOW BUILDING SLABS AND FOOTINGS: ALL SOIL FILL MATERIAL MUST BE APPROVED BY SOILS ENGINEER PRIOR TO PLACEMENT. PROOFROLL SUBGRADE REMOVING AND REPLACING SOFT OR COMPRESSIVE MATERIALS. FILL MATERIAL SHALL BE PLACED IN LAYERS NOT TO EXCEED 8 INCHES AND COMPACTED TO MIN. 95 PERCENT OF THE DRY MAXIMUM DENSITY AS DETERMINED BY ASTM D698.
- D. BORINGS ENCOUNTERED FILL AND PROBABLE FILL SOILS GENERALLY CONSISTING OF SILTY SAND, SANDY LEAN CLAY, AND POORLY GRADED SAND, CONTAINING VARIOUS AMOUNTS OF GRAVEL, ROOTS, AND ASPHALT TO DEPTHS OF UP TO 6 FEET BELOW EXISING GRADES. EXISTING FILL SOILS ARE NOT SUITABLE FOR FOUNDATION OR SLAB ON GRADE SUPPORT AND SHALL BE REMOVED TO NATURAL SUBGRADE SOILS AND REPLACED WITH APPROVED ENGINEERED FILL.
- E. IF SOFT OF UNSUITABLE SOILS ARE OBSERVED AT FOOTING BEARING ELEVATIONS, UNSUITABLE SOILS SHALL BE UNDERCUT, REMOVED AND REPLACED WITH ENGINEERED FILL OR LEAN CONCRETE TO BOTTOM OF PROPOSED FOOTING ELEVATION.

3. CONCRETE

- A. CONCRETE CONSTRUCTION SHALL BE PER THE APPLICABLE BUILDING CODE, ACI 318 AND ACI 301, LATEST EDITIONS.
- B. CONCRETE SHALL ATTAIN THE FOLLOWING 28 DAY COMPRESSIVE STRENGTHS PER ASTM A39.
- | | |
|----------------------|-----------|
| --LEAN CONCRETE FILL | 1,000 PSI |
| --FOOTINGS, PIERS | 3,000 PSI |
| --SLAB-ON-GRADE | 3,500 PSI |
| --WALLS | 4,000 PSI |
- C. VERIFY CONCRETE STRENGTHS WITH A MINIMUM OF ONE SET OF NINE 4X8-INCH COMPRESSION CYLINDERS, (3 @ 7 DAYS, 3 @ 28, 3 SPARE).
- D. EXTERIOR CONCRETE SHALL BE AIR-ENTRAINED TO PROVIDE AN AIR CONTENT OF 6+/-1.5 PERCENT BY VOLUME.
- E. PROVIDE CLEAR DISTANCE TO OUTERMOST REINFORCING, UNO, AS FOLLOWS:
- | | |
|---------------------------------------|--------------|
| CONCRETE CAST AGAINST EARTH | 3 INCHES |
| CONCRETE EXPOSED TO EARTH OR WEATHER: | |
| #5 OR SMALLER | 1 1/2 INCHES |
| #6 OR LARGER | 2 INCHES |
| OTHER CONCRETE: | |
| SLABS & WALLS 3/4 INCHES | |
- F. NON-SHRINK GROUT FOR COLUMNS BASE PLATES SHALL ATTAIN A 28 DAY COMPRESSIVE STRENGTH: F'c = 5,000 PSI.
- G. REINFORCING STEEL SHALL CONFORM TO A615-GR60; MESH SHALL CONFORM TO ASTM A185 WITH MINIMUM LAPS OF 8 INCHES. PLACING PLANS AND SHOP FABRICATION DETAILS SHALL BE IN ACCORDANCE WITH "THE MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES". FURNISH SUPPORT BARS AND ACCESSORIES IN ACCORDANCE WITH C.R.S.I. STANDARDS.
- H. REINFORCING STEEL IN ELEVATED CONCRETE SLABS EXPOSED TO WEATHER OR SUBJECT TO DE-ICING CHEMICALS (GARAGE SLABS, BALCONIES, ETC.) SHALL BE PROTECTED AGAINST CORROSION BY USE OF EPOXY-COATED REBAR OR CORROSION INHIBITING ADMIXTURE (2.5 GAL/YD MIN.), OR BY OTHER APPROVED MEANS.
- I. PROVIDE CORNER BARS TO MATCH HORIZONTAL REINFORCING IN WALLS AND FOOTINGS. SPLICE LAPS SHALL BE A MINIMUM OF 36 BAR DIAMETERS, UNLESS NOTED OTHERWISE. PROVIDE DOWELS BETWEEN FOOTINGS AND WALLS OR PIERS TO MATCH SIZE AND SPACING OF VERTICAL REINFORCING.
- J. WALLS WITH LATERAL EARTH PRESSURES SHALL BE ADEQUATELY SHORED OR FLOOR/ROOF CONSTRUCTION SHALL BE IN PLACE AND SECURED PRIOR TO BACKFILLING.
- K. INSTALLATION OF ELECTRICAL CONDUIT WITHIN THE SLAB ON GRADE IS PROHIBITED
4. MASONRY
- A. MASONRY CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE APPLICABLE BUILDING CODE AND THE "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" TMS 402/ACI-530/ASCE 5 AND THE "SPECIFICATIONS FOR MASONRY STRUCTURES" TMS 602/ACI-530.1/ASCE 6, LATEST EDITIONS.
- B. MASONRY TO CONFORM TO THE FOLLOWING SPECIFICATIONS:
- | | |
|---------------------------|------------------------|
| HOLLOW LOAD-BEARING C.M.U | ASTM C90 |
| CONCRETE BUILDING BRICK | ASTM C55, GRADE A |
| MORTAR | ASTM C270, TYPE M OR S |
| GROUT | ASTM C476 |
- C. MASONRY ASSEMBLIES SHALL HAVE COMPRESSIVE STRENGTH (F'M) GREATER THAN OR EQUAL TO 5,000 PSI.
- D. WALLS SHALL BE CONSTRUCTED USING A FULL BED OF MORTAR. VERTICAL REINFORCING SHALL BE GROUTED IN PLACE WITH 2500 PSI GROUT (GROUT SLUMP SHALL FALL BETWEEN 8 AND 11 INCHES) POUR HEIGHT AND LIFT HEIGHT SHALL NOT EXCEED 5 FEET - 0 INCHES.
- E. PROVIDE CONTINUOUS HORIZONTAL JOINT REINFORCING IN MASONRY WALLS AT 16 INCHES O.C. PROVIDE AT 8 INCHES O.C. AT PARAPETS.
- F. CAVITY WALLS OF BRICK AND BLOCK SHALL BE CONSTRUCTED WITH JOINT REINFORCING IN MASONRY AND ADJUSTABLE METAL ANCHORS TO BRICK.
- G. UNLESS NOTED OTHERWISE, PROVIDE 16 INCH LONG BY 24 INCHES HIGH SOLID OR GROUTED BLOCK UNDER BEARING ENDS OF BEAMS.
- H. PROVIDE 48 INCH REINFORCEMENT LAP AT CONTINUOUS BOND BEAM STEPS.
- I. COMPOSITE WALLS SHALL HAVE THE COLLAR JOINT BETWEEN BRICK AND BLOCK GROUTED SOLID AND THE WALLS SHALL BE BUILT WITH BOTH WYTHES SIMULTANEOUSLY.
- J. MASONRY WALLS SHALL HAVE CONTROL JOINTS AT 30 FEET ON CENTER UNLESS NOTED OTHERWISE.
- K. REINFORCING STEEL SHALL CONFORM TO ASTM A615-GR60. LAP BARS A MINIMUM OF 48 BAR DIAMETERS. GROUT ALL REINFORCED CORES SOLID.
- L. UNLESS SHOWN ON PLAN, LINTELS FOR MASONRY WALLS SHALL BE AS FOLLOWS:
- | | |
|--|---------------------------------|
| OPENINGS TO 3 FT, 0 IN | 3 1/2x3 1/2x1/4 |
| 3 FT, 1 IN TO 5 FT, 0 IN | 4x3 1/2x5/16 - 3 1/2 HORIZONTAL |
| 5 FT, 1 IN TO 6 FT, 6 IN | 5x3 1/2x5/16 - 3 1/2 HORIZONTAL |
| OVER 6 FT, 6 IN | CONSULT ARCHITECT/ENGINEER |
| PROVIDE 1 ANGLE FOR EACH 4 INCHES OF WALL THICKNESS. LINTELS SHALL BEAR 6 INCHES MINIMUM EACH END U.N.O. | |
- M. PROVIDE TWO-PIECE ADJUSTABLE ANCHORS TO MASONRY AT A MAXIMUM SPACING OF 24 INCHES O.C. AT ALL VERTICAL AND HORIZONTAL STRUCTURAL STEEL MEMBERS.
- N. CAVITY WALLS OF BRICK WITH STUD BACKUP SHALL BE CONSTRUCTED WITH TWO-PIECE ADJUSTABLE METAL ANCHORS AT A MAXIMUM SPACING OF 16 INCHES O.C. HORIZONTAL (INTO STUDS) AND 24 INCHES O.C. VERICAL. AT BRICK WALLS OVER 30 FEET HIGH, PROVIDE ANCHORS AT 16 INCHES O.C. HORIZONTAL AND VERTICAL.
- O. ALL NON-LOADBEARING MASONRY WALLS SHALL BE PROVIDED WITH VERTICAL SLIP CONNECTIONS AT THE TOP OF THE WALL, U.N.O.

ABBREVIATIONS & LEGEND			
A	ANCHOR BOLT	F	FOOTING MARK
AB	ADDITIONAL	FD	FLOOR DRAIN
ADDL	ADJACENT	FDN	FOUNDATION
ADJ	ADJACENT	FOB	FACE OF BUILDING
AFF	ABOVE FINISH FLOOR	FOM	FACE OF MASONRY WALL
ALT	ALTERNATE	FOS	FACE OF STUD
APPROX	APPROXIMATE(LY)	FS	FOOTING STEP
ARCH	ARCHITECT(URAL)	FTG	FOOTING
		FUT	FUTURE
B		G	GAGE, GAUGE
BF	BEAM MARK	GA	GALVANIZED
BOT	BOTTOM OF FOOTING ELEVATION	GC	GENERAL CONTRACT(OR)
BLKG	BRACED FRAME MARK	GT	GIRDER TRUSS
BLDG	BLOCKING		
BM	BUILDING	H	HORIZ
BOD	BEAM FACE	HP	HIGH POINT
BOS	BOTTOM OF DECK	HS	HIGH STRENGTH
BOTT	BOTTOM OF STEEL	HT	HEIGHT
BOTT	BOTTOM	HTR	HIP TRUSS
BP	BEARING PLATE MARK		
BRG	BEARING	I	INFO
BSMT	BASEMENT	IF	INSIDE FACE
BTWN	BETWEEN	J	JOIST
		JBE	JOIST BEARING ELEVATION
C	COLUMN MARK	JST	JOIST
CIP	CAST IN PLACE	JT	JOINT
CJ	CONTROL/CONSTRUCTION JOINT	JTR	JACK TRUSS
CLR	CLEAR(ANCE)		
CMU	CONCRETE MASONRY UNIT	K	KIP
COL	COLUMN	KO	KNOCK-OUT
COM	CENTER OF MASONRY WALL	KSI	KIPS PER SQ. INCH
COMP	COMPOSITE		
CONC	CONCRETE	L	LINTEL MARK
CONN	CONNECTION	LLH	LONG LEG HORIZONTAL
CONST	CONSTRUCTION	LLV	LONG LEG VERTICAL
CONT	CONTINUOUS	LL	LIVE LOAD
COORD	COORDINATE(TION)	LP	LOW POINT
COS	CENTER OF STUD	LVL	LAMINATED VENEER LUMBER
D	DEFORMED BAR ANCHORS	M	MANUF
DBA	DETAIL	MAS	MASONRY
DTL	DIAMETER	MAX	MAXIMUM
DJAM	DIAGONAL	MIN	MINIMUM
DIAM	DIAGONAL	MISC	MISCELLANEOUS
DN	DOWN	MO	MASONRY OPENING
DWG	DRAWING	MATL	MATERIAL
DBL	DOUBLE	MTL	METAL
DL	DEAD LOAD		
		N	NTS
E	EACH	NS	NEAR SIDE
EA	EACH END	NIC	NOT IN CONTRACT
EE	EACH FACE		
EF	EACH SIDE	O	ON CENTER(S)
EL	ELEVATION	OPNG	OPENING
ELEV	ELEVATOR	OPP	OPPOSITE
EOD	EDGE OF DECK	OF	OUTSIDE FACE
EOJ	EDGE OF JOIST		
EOS	EDGE OF SLAB		
EQ	EQUAL		
EQUIP	EQUIPMENT		
ES	EACH SIDE		
EW	EACH WAY		
EXIST, EX	EXISTING		
EXP	EXPANSION		
EXT	EXTERIOR		
		P	PIER MARK
		PC	PRECAST CONCRETE
		PDF	POWER DRIVEN FASTENER
		PEB	PRE-ENGINEERED BUILDING
		PERIM	PERIMETER
		PL	PLATE
		PLF	POUNDS PER LINEAR FOOT
		PP	PRECAST PLANK MARK
		PROJ	PROJECTION
		PSF	POUNDS PER SQ. FOOT
		PSI	POUNDS PER SQ. INCH
		PSL	PARALLEL STRAND LUMBER COLUMN
		PT	POST TENSION(ED)/PRESSURE TREATED
		Q	QTY
		R	RADIUS
		RAD	RADIUS
		RD	ROOF DRAIN
		REV	REVISION, REVISE(D)
		REINF	REINFORCE(ED), (ING)
		REM	REMAINDER
		REQ'D	REQUIRED
		RTU	ROOF TOP UNIT
		S	SOIL BORING
		SB	SLIP CRITICAL
		SC	SPECIALTY DESIGN ENGINEER
		SE	SIMILAR
		SIM	STEEL JOIST INSTITUTE
		SJ	SLAB ON GRADE
		SOG	SQUARE
		SQ	STANDARD
		STD	STEEL
		STL	STRUCTURAL
		STRUCT	SPACES
		SPA	SNOW LOAD
		SL	STAINLESS STEEL
		SS	
		T	TEMP
		TF	TEMPORARY
		THK	THICKNESS, (ENED)
		TJ	WOOD JOIST
		TJ1	THROUGH OUT
		T0	TOP OF CONCRETE
		TOC	TOP OF PIER ELEVATION
		TOP	TOP OF STEEL ELEVATION
		TOS	TOP OF WALL ELEVATION
		TOW	TYPICAL
		TYP	
		U	UNEXCAVATED
		UNEXC	UNLESS NOTED OTHERWISE
		UNO	UNDERSIDE METAL DECK ELEVATION
		UMD	
		V	VERT
		VIF	VERIFY IN FIELD
		W	WIND
		W/	WITH
		WF	WIND FRAME
		WP	WORK POINT
		WWF	WELDED WIRE FABRIC

SHEET LIST				
SHEET NUMBER	SHEET NAME	SD	FTG	DD
S0001	STRUCTURAL NOTES AND ABBREVIATIONS	X	X	X
S0002	STRUCTURAL NOTES	X	X	X
S0003	SPECIAL INSPECTIONS		X	X
S0010	SNOW LOADING DIAGRAM	X	X	X
S0101	FOUNDATION PLAN	X	X	X
S0102	LOW ROOF FRAMING PLAN	X	X	X
S0103	HIGH ROOF FRAMING PLAN	X	X	X
S0300	FOUNDATION SECTIONS	X	X	X
S0301	FOUNDATION SECTIONS		X	X
S0302	FOUNDATION SECTIONS			X
S0400	COLUMN SCHEDULE AND SECTIONS	X	X	X
S0401	TYPICAL STEEL SECTIONS	X	X	X
S0410	BRACED FRAME ELEVATIONS AND DETAILS	X	X	X
S0501	ROOF FRAMING SECTIONS	X	X	X



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIO@MBDC.COM

CONGRESS HEIGHTS
RECREATION CENTER
611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056

ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
	FTG REVISION	8/22/25

STRUCTURAL NOTES
AND ABBREVIATIONS

S0001

5. STEEL

A. STEEL CONSTRUCTION SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE BUILDING CODE AND SHALL CONFORM TO AISC 360. STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING ASTM STANDARDS:

WIDE FLANGE SHAPES AND CHANNELS	A992 – GR50
STEEL PLATES AND ANGLES	A572 GRADE 50
STRUCTURAL RECT/ROUND (HSS)	A500 - GR C
ANCHOR RODS (3/4" DIAM. OR LESS)	F1554 – 36 KSI
ANCHOR RODS (7/8" DIAM. OR GREATER)	F1554 – 55 KSI
HIGH-STRENGTH BOLTS	A325
HEADED STUDS	A108

- B. BOLTED CONNECTIONS TO USE A325-TYPE N, HIGH STRENGTH BOLTS IN BEARING TYPE CONNECTIONS TIGHTENED TO A SNUG TIGHT CONDITION IN ACCORDANCE WITH RCSC SPECIFICATIONS.
- C. BOLTS IN MOMENT CONNECTIONS AND WIND RESISTING FRAMES SHALL BE ASTM A325-TYPE SC (SLIP CRITICAL). SLIP CRITICAL CONNECTIONS SHALL HAVE CONTACT SURFACES MEETING CLASS A SURFACE CONDITIONS. BOLTS SHALL BE TENSIONED.
- D. SHOP CONNECTIONS TO BE WELDED OR BOLTED. FIELD CONNECTIONS TO BE BOLTED UNLESS OTHERWISE SHOWN. BOLT HOLES TO BE STANDARD ROUND HOLES (d+1/16 INCHES) UNLESS OTHERWISE NOTED. SHORT SLOTS SHALL BE PERMITTED NORMAL TO THE LOAD DIRECTION IN SLIP CRITICAL AND BEARING TYPE CONNECTIONS AS PER AISC REQUIREMENTS.
- E. IF BEAM REACTIONS ARE DENOTED ON THE DRAWINGS, BEAM-WEB CONNECTIONS FOR SHEAR AT EACH END SHALL BE DETAILED TO SUPPORT THE LOADS SHOWN OR PROVIDE THE FOLLOWING MINIMUM NUMBER OF BOLTS, WHICHEVER IS GREATER. STIFFENED SEATS SHALL BE DETAILED TO SUPPORT THE LOADS SHOWN ON THE DRAWINGS OR THE MINIMUM FACTORED LOADS INDICATED BELOW, WHICHEVER IS GREATER.

BEAM/WEB	STIFF. SEAT
W8 OR W10 2 BOLTS	20K
W12 OR W14 3 BOLTS	30K
W16 OR W18 4 BOLTS	40K
W21 OR W24 5 BOLTS	60K

- F. STRUCTURAL STEEL SHALL BE GIVEN ONE SHOP COAT OF APPROVED SHOP PRIMER APPLIED TO CLEAN AND DRY SURFACES. DO NOT PAINT STEEL THAT WILL BE FIREPROOFED OR EMBEDDED IN CONCRETE.
- G. WELDING OF STRUCTURAL STEEL SHALL BE WITH E70XX ELECTRODES.

6. STEEL JOISTS

- A. STEEL JOISTS SHALL BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE BUILDING CODE AND SJI.
- B. SUPPLIER SHALL PROVIDE A LETTER SIGNED AND SEALED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF THE PROJECT STATING THAT STANDARD JOISTS CONFORM TO SJI SPECIFICATIONS. PROVIDE CALCULATIONS FOR ALL JOIST GIRDERS, SPECIAL JOISTS, NON-SJI STANDARD BRIDGING DETAILS, NON-SJI STANDARD CONNECTIONS, FIELD SPLICES, AND JOIST HEADERS. CALCULATIONS SHALL BE SIGNED AND SEALED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF THE PROJECT.
- C. EXTEND BOTTOM CHORDS OF JOISTS TO CONNECT AT ALL COLUMNS AFTER DEAD LOADS ARE APPLIED. IF JOIST DOES NOT INTERSECT COLUMN, CONNECT NEAREST JOIST BOTTOM CHORD TO GIRDER OR BEAM. PROVIDE UPLIFT BRIDGING AND STANDARD BRIDGING PER SJI STANDARDS. ANCHOR BRIDGING TO MASONRY WALLS OR STEEL BEAMS AT ENDS.
- D. JOISTS AND JOIST GIRDERS SHALL BE DESIGNED FOR A NET UPLIFT OF 15 PSF.

7. STEEL DECK

- A. STEEL DECK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE BUILDING CODE AND THE STEEL DECK INSTITUTE SPECIFICATIONS AND RECOMMENDATIONS.
- B. ROOF DECK SHALL BE 22 GAGE, 1 1/2 INCH DEEP, TYPE B, WIDE RIB (Ip=0.155, Sp=0.186, In=0.183, Sn=0.192 PER FOOT OF WIDTH, U.N.O.) AND SHALL EXTEND A MINIMUM OF 3 SPANS, U.N.O. DECK SHALL BE GALVANIZED.
- C. MINIMUM REQUIREMENTS FOR ROOF DECK FASTENING SHALL BE 5/8 INCH DIAMETER PUDDLE WELDS USING A 36/5 OR 30/4 WELD PATTERN WITH #10 TEK SCREW SIDELAP FASTENER AT 18 INCHES O.C.

8. LIGHT GAGE METAL FRAMING (PERFORMANCE REQUIREMENTS)

- A. LIGHT GAGE FRAMING SHALL BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE BUILDING CODE AND AISI, LATEST EDITION.
- B. SUBMIT CALCULATIONS AND SHOP DRAWINGS SIGNED AND SEALED BY A SPECIALTY ENGINEER REGISTERED IN THE STATE OF THE PROJECT. MEMBERS AND CONNECTIONS SHALL BE DESIGNED FOR THE LOADINGS NOTED ABOVE. ANY SIZES NOTED IN THE DRAWINGS ARE FOR GENERAL INFORMATION ONLY.
- C. EXTERIOR WALL FRAMING SHALL BE DESIGNED FOR THE FOLLOWING MAXIMUM LATERAL DEFLECTIONS, AT THE APPLICABLE DESIGN WIND:
- | | |
|---|---|
| AT MASONRY VENEER
AT OTHER LOCATIONS | L/600 OR 0.3 INCH, WHICHEVER IS LESS
L/360 |
|---|---|
- D. SHOP DRAWINGS SHALL INCLUDE ERECTION DRAWINGS SHOWING MEMBER LAYOUT, SIZE AND SPACING. PROVIDE CONNECTION DETAILS SUPPLEMENTAL BRACING, SPLICES, ACCESSORIES, AND DETAILS AS MAY BE REQUIRED FOR PROPER INSTALLATION.
- E. LIGHT GAUGE STUD CAPACITY SHALL BE REDUCED BY 20% AT 2-HOUR LOAD-BEARING WALLS. REFERENCE ARCHITECTURAL DRAWINGS FOR FIRE RATINGS AND UL DESIGN REDUCTIONS.
- F. THE SPECIALTY ENGINEER SHALL VISIT THE JOBSITE DURING CONSTRUCTION TO VERIFY CONFORMANCE TO THE SHOP DRAWINGS. AT THE COMPLETION OF THE PROJECT PROVIDE A LETTER CERTIFYING THE CONSTRUCTION IS IN ACCORDANCE WITH THE DESIGN AND APPROVED SHOP DRAWINGS AND APPROVED SHOP DRAWINGS.
- G. MATERIALS AND FINISHES:
- FOR 16-GAGE AND HEAVIER UNITS, FABRICATE METAL FRAMING COMPONENTS OF STRUCTURAL QUALITY STEEL SHEET WITH A MINIMUM YIELD POINT OF 50,000 PSI; ASTM A653, ASTM A875, ASTM A792, OR ASTM A463.
- FOR 18-GAGE AND LIGHTER UNITS, FABRICATE METAL FRAMING COMPONENTS OF COMMERCIAL QUALITY STEEL SHEET WITH A MINIMUM YIELD POINT OF 33,000 PSI; ASTM A653, ASTM A875, ASTM A792, OR ASTM A463.
- PROVIDE GALVANIZED FINISH TO METAL FRAMING COMPONENTS COMPLYING WITH ASTM A924 FOR MINIMUM G60 COATING.
- ALL STUDS SHALL BE STANDARD LOAD-BEARING STEEL STUDS OF SIZE, SHAPE, AND GAGE INDICATED, WITH 1.625 INCH FLANGE AND FLANGE RETURN LIP.
- STUDS MATERIAL USED TO BACKUP ON SUPPORT BRICK SHALL USE A MINIMUM 18 GAGE STUD AND HAVE A G90 FINISH.
- H. WELD STUD WORK USING E60XX ELECTRODES BY CERTIFIED WELDERS. FOR MECHANICAL FASTENERS, USE ONLY POLYMER FINISHES, CHROMIUM PLATED, STAINLESS STEEL OR HOT DIP GALVANIZED UNITS.
- I. CONSTRUCT ALL NON-LOADBEARING WALLS WITH A VERTICAL SLIP CONNECTION AT THE TOP OF THE WALL.

9. POST-INSTALLED ANCHORS IN CONCRETE AND MASONRY

A. GENERAL

INSTALL ANCHORS IN STRICT CONFORMANCE WITH THE MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS AND PROCEDURES. ALL POST-INSTALLED ANCHORS IN CONCRETE SHALL HAVE ICC APPROVAL FOR USE IN CRACKED CONCRETE.

SUBSTITUTION REQUESTS FOR ALTERNATE PRODUCTS MUST BE SUBMITTED FOR APPROVAL PRIOR TO USE. CONTRACTOR SHALL PROVIDE LOAD CAPACITIES DEMONSTRATING THAT THE SUBSTITUTED PRODUCT IS CAPABLE OF ACHIEVING THE PERFORMANCE VALUES OF THE SPECIFIED PRODUCT.

PROVIDE STAINLESS STEEL FASTENERS FOR EXTERIOR USE OR WHEN PERMANENTLY EXPOSED TO WEATHER. PROVIDE GALVANIZED CARBON STEEL ANCHORS AT OTHER LOCATIONS, UNLESS OTHERWISE NOTED.

B. PRODUCTS

ANCHORS IN CONCRETE:

--EXPANSION ANCHORS SHALL BE HILTI KWIK BOLT TZ2.

--UNDERCUT ANCHORS SHALL BE HILTI HDA-P.

--SCREW ANCHORS SHALL BE HILTI KWIK HUS EZ.

--ADHESIVE ANCHORS SHALL BE HILTI HIT-HY 200 V3 SAFE SET SYSTEM WITH HILTI HIT-Z ROD OR WITH HILTI HOLLOW DRILL BIT SYSTEM WITH HAS-E THREADED ROD.

ANCHORS IN MASONRY:

--EXPANSION ANCHORS SHALL BE HILTI KWIK BOLT TZ2. GROUT MASONRY CELLS SOLID WITH 2000 PSI GROUT AT ANCHOR LOCATIONS.

--SCREW ANCHORS SHALL BE HILTI KWIK HUS EZ. GROUT MASONRY CELLS SOLID WITH 2000 PSI GROUT AT ANCHOR LOCATIONS.

--ADHESIVE ANCHORS IN SOLID MASONRY SHALL BE HILTI HIT-HY 270 ADHESIVE ANCHORING SYSTEM. STEEL ANCHOR ELEMENT SHALL BE HILTI HAS-E CONTINUOUSLY THREADED ROD OR HILTI HIS-N INTERNALLY THREADED INSERT.

--ADHESIVE ANCHORS IN HOLLOW OR MULTI-WYTHE MASONRY SHALL BE HILTI HIT-HY 270 ADHESIVE ANCHORING SYSTEM. STEEL ANCHOR ELEMENT SHALL BE HILTI HAS-E CONTINUOUSLY THREADED ROD OR HILTI HIT-IC INTERNALLY THREADED INSERT. THE APPROPRIATE SIZE SCREEN TUBE SHALL BE USED PER THE ADHESIVE MANUFACTURER'S RECOMMENDATION.

SUBSTITUTIONS:

SUBSTITUTIONS FOR THE SPECIFIED ANCHORS SHALL BE SUBMITTED AS REQUESTED ABOVE. FOR ADHESIVE ANCHORS, PROPOSED SUBSTITUTE PRODUCTS SHALL INCLUDE THE FOLLOWING BASIS OF DESIGN PARAMETERS:

ANCHORS IN CONCRETE:

-CRACKED CONCRETE

ADHESIVE ANCHORS IN CONCRETE:

-CRACKED CONCRETE

-WATER SATURATED CONCRETE

-BASE MATERIAL TEMPERATURE OF 50-100 DEGREES FAHRENHEIT (AT INSTALLATION).

-BASE MATERIAL IN-SERVICE TEMPERATURE OF 110 DEGREES FAHRENHEIT (LONG TERM), 130 DEGREES FAHRENHEIT (SHORT TERM)

ADHESIVE ANCHORS IN MASONRY:

-BASE MATERIAL TEMPERATURE OF 50-100 DEGREES FAHRENHEIT (AT INSTALLATION).

-BASE MATERIAL IN-SERVICE TEMPERATURE OF 110 DEGREES FAHRENHEIT (LONG TERM), 130 DEGREES FAHRENHEIT (SHORT TERM)

C. INSTALLATION

ALL INSTALLATION PROCEDURES SHALL BE PER MANUFACTURERS RECOMMENDATIONS. COORDINATE AND/OR PROVIDE FOR THIRD PARTY INSPECTION AS REQUIRED BY BUILDING CODE OR LOCAL JURISDICTION.

ANCHOR CAPACITY IS DEPENDENT UPON SPACING BETWEEN ADJACENT ANCHORS AND PROXIMITY OF ANCHOR TO EDGE OF CONCRETE OR MASONRY. INSTALL ANCHORS IN ACCORDANCE WITH SPACING AND EDGE DISTANCE INDICATED ON THE DRAWINGS; IF NOT SHOWN, COMPLY WITH MINIMUM SPACING AND EDGE DISTANCE FOR FULL ANCHOR CAPACITY, AS SPECIFIED BY MANUFACTURER.

EXISTING REINFORCING BARS IN THE CONCRETE OR MASONRY STRUCTURE MAY CONFLICT WITH SPECIFIC ANCHOR LOCATIONS. DO NOT CUT OR DAMAGE REINFORCING BARS UNLESS SPECIFICALLY PERMITTED IN THE DRAWINGS.

PRIOR TO DRILLING, THE CONTRACTOR SHALL LOCATE REINFORCING BAR POSITIONS IN THE IMMEDIATE VICINITY OF PROPOSED POST-INSTALLED ANCHORS USING GPR, X-RAY, OR OTHER NON-DESTRUCTIVE MEANS.

WHEN CONFLICTS BETWEEN PROPOSED ANCHORS AND EXISTING REINFORCING BARS EXIST, SUBMIT RESULTS OF BAR LOCATIONS TO ARCHITECT / ENGINEER FOR REVIEW AND FURTHER DIRECTION.

WARNING: THE STRUCTURAL INTEGRITY OF THE BUILDING SHOWN ON THESE PLANS IS DEPENDENT UPON COMPLETION ACCORDING TO PLANS AND SPECIFICATIONS. STRUCTURAL MEMBERS ARE NOT SELF-BRACING UNTIL PERMANENTLY AFFIXED TO THE STRUCTURE. THE STRUCTURAL ENGINEERS ASSUME NO LIABILITY FOR THE STRUCTURE DURING CONSTRUCTION.



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS
RECREATION CENTER
611 ALABAMA AVE., SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056

ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE

STRUCTURAL NOTES

S0002

Special Inspection Policy Manual						
Concrete curing	Field inspection of curing process	Y	P	Field Review: ACI 318: 5.11-13; IBC 1705.3, 1710.9	FMC	
Concrete strength	Evaluation of concrete strength	Y	P	Laboratory Testing: ACI 318: 6.2; IBC 1705.3	FMC	
Inspect anchors post-installed in hardened concrete members	IBC TABLE 1705.3	Y	C	ACI 318: 17.8.2.4	FMC	
PRECAST CONCRETE						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures**	N	P	Submittal or Field Review: IBC 1705.3		
Erection and installation	Review submittals and as-built assemblies; Field inspection of in-place precast	N	P	Submittal and Field Review: ACI 318: Ch. 16; IBC Table 1705.3		
MASONRY (Level ____; Building Risk Category ____) TYPICAL FOR LEVEL B AND RISK CATEGORY I, II, III						
Materials	Review of products supplied versus certificate of compliance and material submitted	N	P	Submittal & Field Review: ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4, 1708		
Strength	Testing/review of strength	N	C	Submittal & Field Review: ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4, 2105.2.2, 2105.3		
Mortar and Grout	Inspection of proportioning and mixing. Placement of mortar only.	N	P	Field Review: IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Grout placement, including pre-stressing grout	Verification to ensure compliance	N	C	Field Review: IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Grout space	Verification to ensure compliance	N	P	Field Review: IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6; TMS 602		
Mortar, grout, and prism specimens	Observe Preparation	N	C	Field Review: IBC 1704.5; ACI 530.1; ASCE 6		
Reinforcement, pre-stressing tendons, and connections	Inspect condition, size, location, and spacing	N	P	Field Review: IBC 1704.5; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Welding of reinforcing bars	Inspection and testing of welds	N	C	Field Review: IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Pre-stressing force	Verify application and measurement	N	C	Field Review: IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Protection	Inspect procedures for protection during cold and hot weather	N	P	Field Review: IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Anchorage	Inspection of anchorages	N	P	Field Review: ACI 530.1/ASCE 6, ASCE 6; IBC 1705.4; ACI 530/ASCE 5		
Masonry installation	Inspection of placement of masonry and joints [Periodic, after the first 5000 SF]	N	C	Field Review: ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4		
Grouting of pre-stressed tendons	Field inspection	N	C	Field Review: ACI 318: 18.18.4; IBC 1705.3		
Application of forces for pre-stressed concrete	Field inspection	N	C	Field Review: ACI 318: 18.20; IBC 1705.3		
STRUCTURAL STEEL Y/N C/P						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures or submit Certificate of Compliance	Y	P	IBC 1704.2.5, IBC 1704.2.5.1, 1704.2.5.2, 1705.2	FMC	
Bolts, nuts, and washers – materials	Material identification markings, Review of Certificate of Compliance	Y	P	Submittal & Field Review: IBC 1705.2.1; IBC 1705.2.2; IBC 1706; ASTM: AISC 360, Section A3.3	FMC	

Special Inspection Policy Manual						
Bolts, nuts, washers – installation	Inspection of in-place high-strength bolts, snug- tight joints, pre-tensioned and bearing type, and slip critical connections	Y	C	Submittal & Field Review: IBC 1705.2.1, 1705.2.2, AISC 360 Section M2.5	FMC	
Structural steel – materials	Material identification markings and review of Certificate of Compliance	Y	P	Submittal & Field Review: IBC 705.2.1, 1705.2.2, 1706; ASTM A6, A568	FMC	
Structural steel details – installation	Inspection of member locations, structural details for bracing, connections, stiffening	Y	P	Submittal & Field Review: IBC 1705.2.1, 1705.2.2, AISC 360	FMC	
Weld filler materials and welder certification	Review of identification markings, Certificate of Compliance, and welder certifications	Y	P	Submittal & Field Review: ASTM AISC 360 A3.5	FMC	
Welds	Inspection and testing of welds	Y	C	Field Review: IBC 1705.2.2.1; AWS D1.1, D1.3	FMC	
Cold-formed metal deck – materials	Review of identification marking manufacturer's certified test results	Y	P	Submittal and Field Review: IBC 1705.2.2; ASTM D1.3	FMC	
Cold-formed metal deck – installation	Review laps and welds	Y	P	Submittal and Field Review: IBC 1705.2.2, AWS D1.3	FMC	
Cold-formed light frame construction – welds	Review welding operation	N	P	IBC 1705.11.2		
Cold form light frame construction wind resistance – screws	Review screw attachment bolting, anchoring hold downs, bracing, diaphragms, struts	N	P	Field Review: IBC 1705.11.2		
Cold-formed steel trusses spanning 60' or greater	Inspection of temporary and permanent restraints/bracing	N	C	Field review IBC 1705.2.4		
WOOD						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures** or submit Certificate of Compliance	N	P	Submittal or Field Review: IBC 1704.2.5, 1705.5, 1705.5.2		
Metal plate connected wood/metal trusses spanning 60' or more	Review approved submittal and installation of restraint/bracing	N	P	Field Review: IBC 1704.2.5, 1705.5, 1705.2		
Joist Hangers – Materials/Installation	Review manufacturer's material and test standards	N	P	Field Review: IBC 1711, ASTM D 1761		
High-Load Diaphragms – Installation	Review submittal and as-built assemblies; inspection of sheathing, framing size, nail and staple diameter and length, number of fastener lines, and fastener spacing.	N	C	IBC 1705.5, 1705.5.1		
Wood Shear Walls–Installation	Review nailing, bolting, anchoring, fastening, Diaphragms, struts, braces, and hold downs when fasteners are ≤ 4" on center.	N	P	Field Review: IBC 1705.11.1		
MAIN WIND FORCE RESISTING SYSTEM Y/N C/P						
Wind requirements	Review of the system components and installation for wood construction, cold-formed steel light frame construction, components, and cladding	N	P	Submittal and Field Review: IBC 1609.1.2, 1704.5.2, 1705.11.705, 1705.4, 1705.4.1, 1705.4.2, 1710		
SEISMIC FORCE RESISTING SYSTEMS						
Seismic requirements	Review of the designated seismic systems and seismic force resistance systems	N	C	Submittal and Field Review: IBC 1613, 1704.5.1, 1705.11, 1705.12; ASCE 7		

Special Inspection Policy Manual						
SMOKE CONTROL						
Special inspection of smoke control systems	Leakage testing and recording of device location, Pressure difference testing, flow measurement and detection, and control verification	N	P	Field Review: IBC 1705.18, 1705.18.1, 1705.17.2, 1705.16.2		
SPRAYED FIRE RESISTIVE MATERIAL, FIRE RESISTANT PENETRATIONS, JOINTS, MASTIC AND INTUMESCENT FIRE RESISTANT COATING						
Structural member surface conditions	Field Review of surface conditions prior to application	N	P	AWCI 12-8; IBC 1705.14, 1705.14.2		
Application/thickness/density/bond strength	Field review of application operations, thickness, and density	N	P	ASTM E605, AWCI 12-8; IBC 1705.14.3, 1705.14.1, 1705.14.3, 1705.14.4; IBC 1705.14.5, 1705.14.6		
Mastic & Intumescent Fire Resistant Coating	Field review of application operations and thickness	N	P	AWCI 12-8; IBC 1705.15		
Fire-resistant penetrations and joints, in high-rise buildings or in buildings assigned to Risk Category III or IV	Field inspection per design	N	P	IBC 1705.17.1, 1705.17.2, ASTM E2174.		
EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS)						
Application	Field Review of application/installation	N	P	ASTM E2570, IBC 1705.16		
SPECIAL CASES						
Alternative Materials and Systems	As requested by Chief Building Official, review system and installation	N	C/P	IBC 1705.1.1		
INSPECTION AGENTS FIRM ADDRESS TELEPHONE						
Special Inspections Engineer of Record	FMC & ASSOCIATES CAPITAL LLC	3927 Georgia Ave NW Unit C1 Washington, DC 20011		202-863-0911		
Materials and Testing Laboratory	FMC & ASSOCIATES CAPITAL LLC	3927 Georgia Ave NW Unit C1 Washington, DC 20011		202-863-0911		
Special Inspections Engineer of Record Smoke Control System						
Additional Agents						


Note: The Qualifications of the Special Inspections Engineer of Record and Testing Laboratories are subject to the Approval of the Chief Building Official. The Schedule of Special Inspections includes certain Architectural, Mechanical, Electric components, Storage Racks and Isolation Systems specified in Section 1705.11 of the Construction Code.

Department of Buildings

Registered Design Professional in Responsible Charge:

David C. Bagnoli

Full Name



10/29/25

Date

Signature

StudioMB Architects

Company or Firm


dbagnoli@studiombdc.com

Email Address

Structural Engineer of Record:

William R. McLain

Full Name



7/9/2025

Date

Signature


Ehler Bryan DC

Company or Firm


wmcain@eb-dc.com

Email Address

Place Stamp Here:

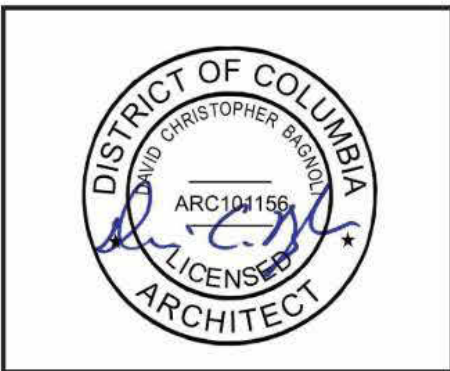

Place Stamp Here:

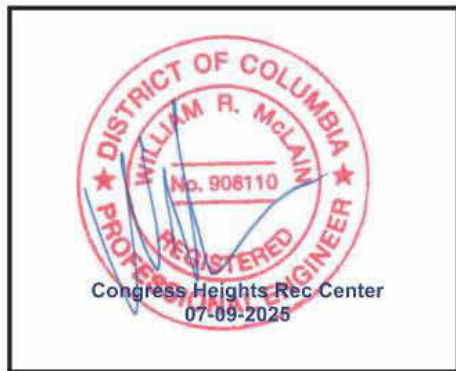

Special Inspections Engineer of Record*:

Fadil M. Abdefatah, PE

Full Name



10-31-2025

Date

Signature

FMC & Associates Capital, LLC

Company or Firm


202-863-0911

Contact Number

fadil.ma@fmcassoc.com

Email Address

Place Stamp Here:

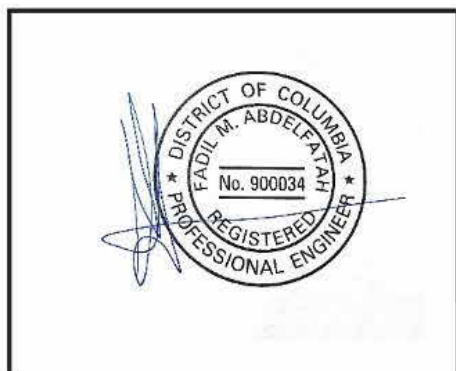

*Note subsequent Special Inspections Engineer(s) of Record will be listed on schedule of Special Inspections.

 DOB | 1100 4th Street SW, Washington, DC 20024 | 202-671-3500 | DOB.dc.gov

Page 2 of 2

Acknowledgments of Special Inspections Requirements

I have read and agree to comply with the terms, conditions, and my responsibilities as they are outlined in the Special Inspection and Testing Agreement:

Owner:

Jamie Johnson

Print Name




10/31/25

Date

Registered Design Professional in Responsible Charge:

David Bagnoli, Studio MB

Print Name/Company



10/29/25

Date

General Contractor:

Adam Turner / GCS-SIGAL

Print Name/Company



10/29/25

Date

Structural Engineer of Record:

William R. McLain / Ehler Bryan DC

Print Name/Company



7/9/2025

Date

Geotechnical Engineer of Record (Required for soils/foundation elements under special inspection):

Dan Spielvogel

Print Name/Company



10/30/25

Date

Third-Party Agency Representative (Required for all projects where NOI for inspections is requested and approved):

FMC & Associates Capital LLC

Print Name/Company



10-31-2025

Date

Special Inspections Engineer of Record (Presides over meeting):

FMC & ASSOCIATES CAPITAL LLC

Print Name/Company



10-31-2025

Date

*This signature must be that of the responsible professional Engineer with the Special Inspection Agency accepted by the Department of Buildings (DOB).

 DOB | 1100 4th Street SW, Washington, DC 20024 | 202-671-3500 | DOB.dc.gov

Page 1 of 1

Special Inspection Policy Manual						
SCHEDULE OF SPECIAL INSPECTIONS						
Address:						
MATERIAL/ACTIVITY	TYPE OF INSPECTION	Y/ N	C/P	EXTENT/REFERENCE	AGENT	COMPLETED
GENERAL						
Pre-construction conference	Meeting with parties listed in Section 6 of DOB SPM to discuss Special Inspection procedures	Y	P	Scheduled by DOB with the Contractor prior to commencement of work	FMC	
EARTHWORK						
Site preparation (building)	Field testing and inspection	Y	P	Field Review: IBC 1705.6	FMC	
Fill material (building)	Review submittals, field testing and inspection	Y	P	Field Review: IBC 1705.6	FMC	
Fill compaction (building)	In-place density tests, lift thickness	Y	C	Field Review: IBC 1705.6	FMC	
Excavation	Field inspection and verification of proper depth	Y	P	Field Review: IBC 1705.6	FMC	
Foundation sub-grade	Field inspection of foundation subgrade prior to placement of concrete	Y	P	Field Review: IBC 1705.6	FMC	
Sheeting and shoring	H piles and lagging, tie backs,	N	C	IBC 1705.2, 1705.7, 1705.8, 1705.7		
DEEP FOUNDATION ELEMENTS						
Materials	Review product, sizes, and lengths	N	C	Submittal and Field Review: IBC 1705.7, 1705.8, 1705.9		
Test piles	Monitor driving of test piles	N	C	Field Review: IBC 1705.8, 9 or .10		
Installation	Monitor drilling, placement, plumb, driving of piles, including recording blows per foot, cut off, and lift elevation	N	C	Field Review: IBC 1705.2, 1705.3, 1705.7		
Load test	Monitor pile load test	N	C	Field Review: IBC 1705.8, 9 or .10		
Helical Piles	Continuous special inspections shall be performed during installation of helical pile foundations	N	C	IBC 1705.9, 1810.3.1, 1810.4.11		
CONCRETE						
Materials	Review product supplied versus certificates of compliance and mix design	Y	P	Submittal & Field Review: IBC 1705.3; ACI 318, Ch. 4 and 5; IBC 1904.2, 1910.2, 1903.3	FMC	
Installation of reinforcing steel, including Pre-stressed tendons and anchor bolts as well as welding	Field inspection of placement	Y	P	Submittal and Field Review: ACI 318.3.5, 3.5.2, 3.8.4 & Ch. 7.8.1.3 and 21.2.8; AWS D1.4; IBC 1705.3, 1908.5, 1909.1, 1910.4	FMC	
Formwork installation	Field inspection	Y	P	Field Review: ACI 318: 6.1.1; IBC 1705.3	FMC	
Concreting operations and placement	Field inspection of placement/sampling	Y	C	Field Review: ACI 318: 5.6, 5.8, 5.9-10; ASTM C 172, C 31; IBC 1705.3, 1910.6, 1910.7, 1910.8, 1910.10	FMC	

Department of Buildings

Statement of Special Inspections

Purpose:

The purpose of this form is to capture the statement of special inspections and all professional stamps.

Instructions:

All information that pertains to the applicant must be completed on all pages of this form.

Permit Numbers:

B2600823

Project Address:

611 Alabama Ave, Washington, DC 20032

This Statement of Special Inspections is submitted as a condition for permit issuance in accordance with the Construction Code. It includes a Schedule of Special Inspections applicable to this project as well as the name of the Special Inspections Engineer(s) of Record, and the identity of other agents such as testing laboratories or agencies intended to be retained for conducting these inspections or tests.

The Special Inspections Engineer of Record (SIER) shall keep records of specified inspections and shall furnish inspection reports to the Chief Building Official, DOB Inspector or Third-Party Inspector, appropriate Registered Design Professionals (RDP), Owner and Contractor. All discrepancies shall be brought to the immediate attention of the Contractor and the Registered Design Professional in Responsible Charge for correction. If the discrepancies are not corrected, the discrepancies shall be brought to the attention of the Chief Building Official and appropriate RDP(s). Interim reports and an activity/incident log shall be made available to the DOB Inspector or Third-Party Inspector according to the DOB Special Inspections Manual.

All fees/costs related to the performance of Special Inspections shall be the responsibility of the Owner. Additionally, the undersigned (RDP or SIER) are only acknowledging that the items enumerated on the Schedule of Special Inspections are consistent with the required design elements, the applicable sections of the DCMR, and their area of expertise.

General Contractor:

Adam Turner

Company:

GCS-SIGAL

License #:

69010099

Owner or Owner's Agent:

Jamie Johnson

Date:

10/31/25

 DOB | 1100 4th Street SW, Washington, DC 20024 | 202-671-3500 | DOB.dc.gov

Page 1 of 2



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM


CONGRESS HEIGHTS
RECREATION CENTER
611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL
AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE
Ehler Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP
Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE
BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.685.8056



ISSUE FOR CONSTRUCTION 2/18/2026


ISSUES / REVISIONS

NO.	DESCRIPTION	DATE

SPECIAL
INSPECTIONS


S0003

C:\Users\jnilsson\Documents\Congress Heights Recreational Center_STRUC_jnilsson\REQQ.M
FILE NAME: 2/18/2026 3:43:49 PM
USER NAME: PM
DATE STAMP:

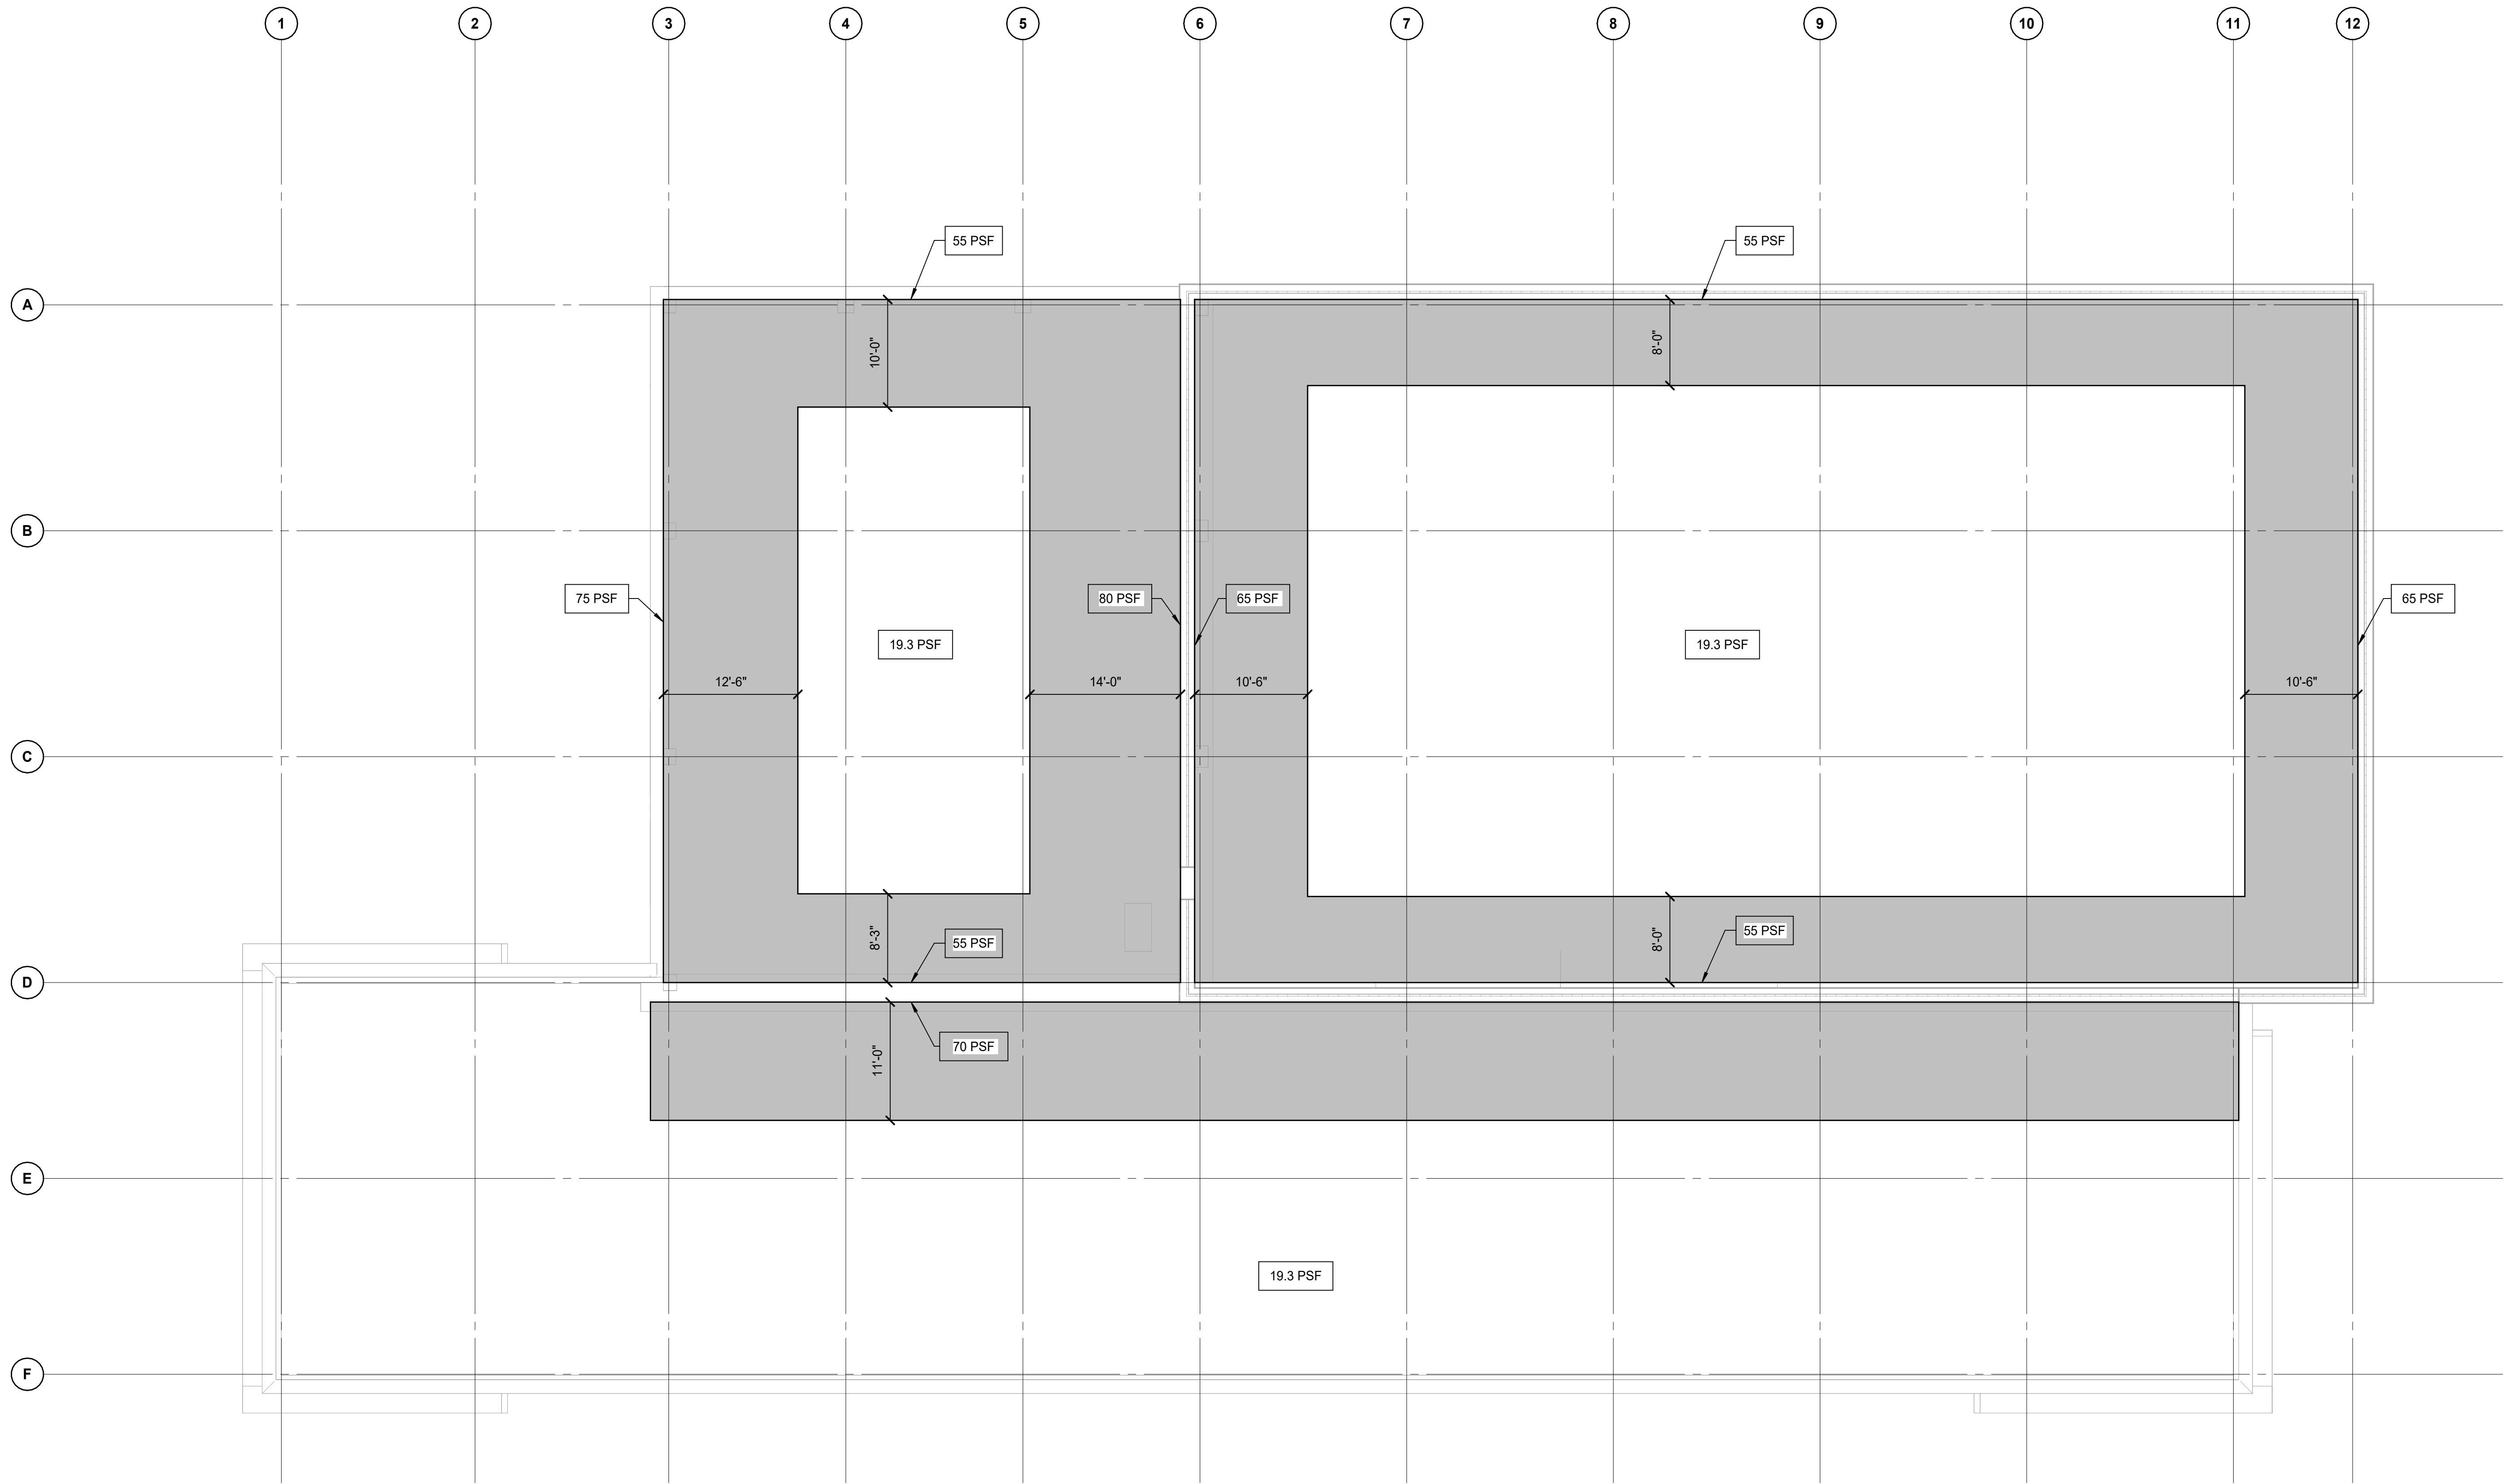

SNOW LOADING DIAGRAM

SCALE: 1/8" = 1'-0"

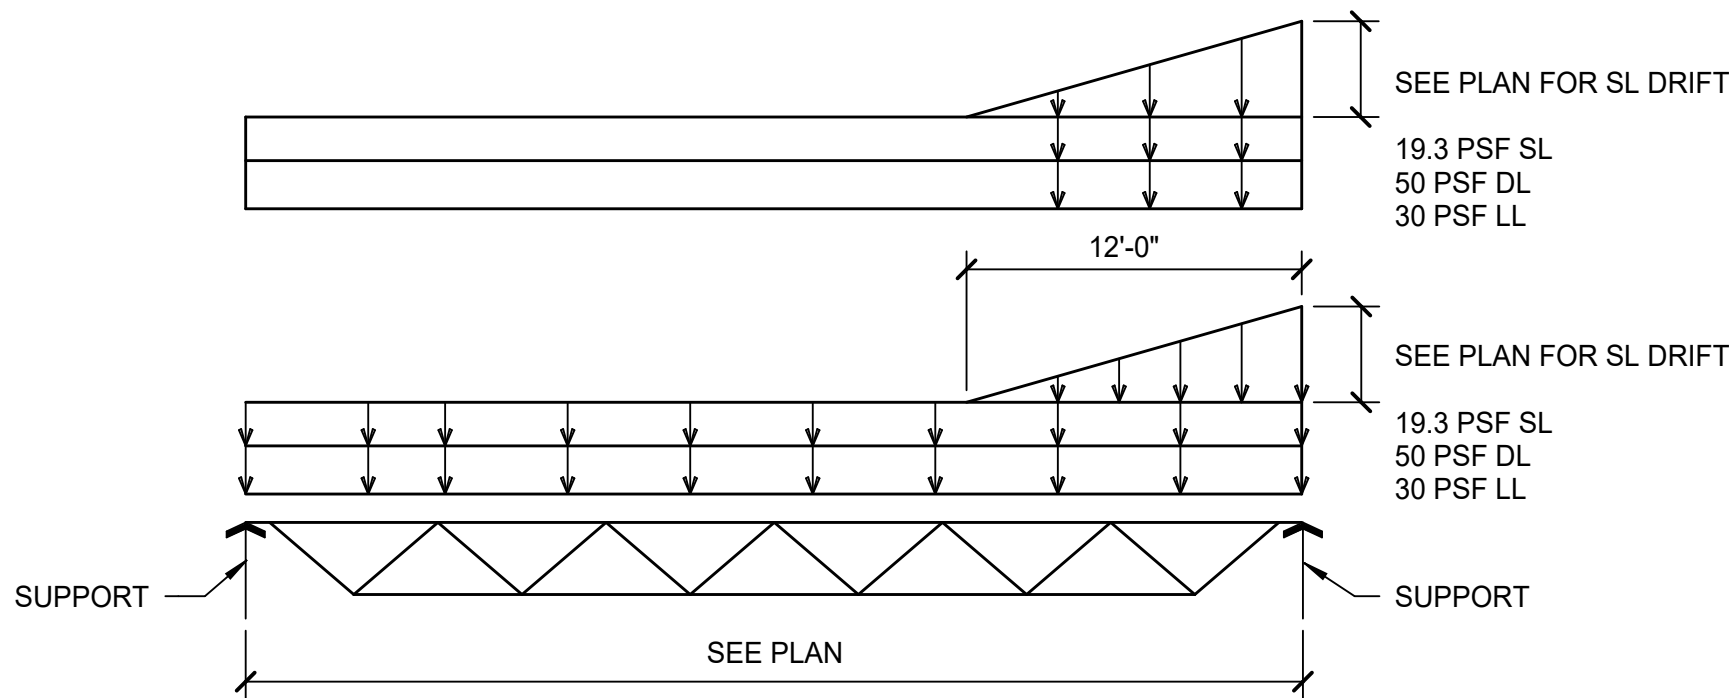

DESIGN FOR FOLLOWING LOAD CASES:
1. DL + SL
2. DL + LL

SPECIAL JOIST LOADING DIAGRAM

DEAD LOADS INDICATED INCLUDE 10 PSF FUTURE PV ALLOWANCE



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS
RECREATION CENTER
811 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056



ISSUE FOR CONSTRUCTION 2/18/2026


ISSUES / REVISIONS

NO.	DESCRIPTION	DATE

SNOW LOADING
DIAGRAM

S0010

C:\Users\jnilsson\Documents\Congress Heights Recreational Center_STRUC_jnilsson\REQ01.MXD
2/18/2026 3:43:50 PM
FILE NAME: USER NAME: DATE STAMP:

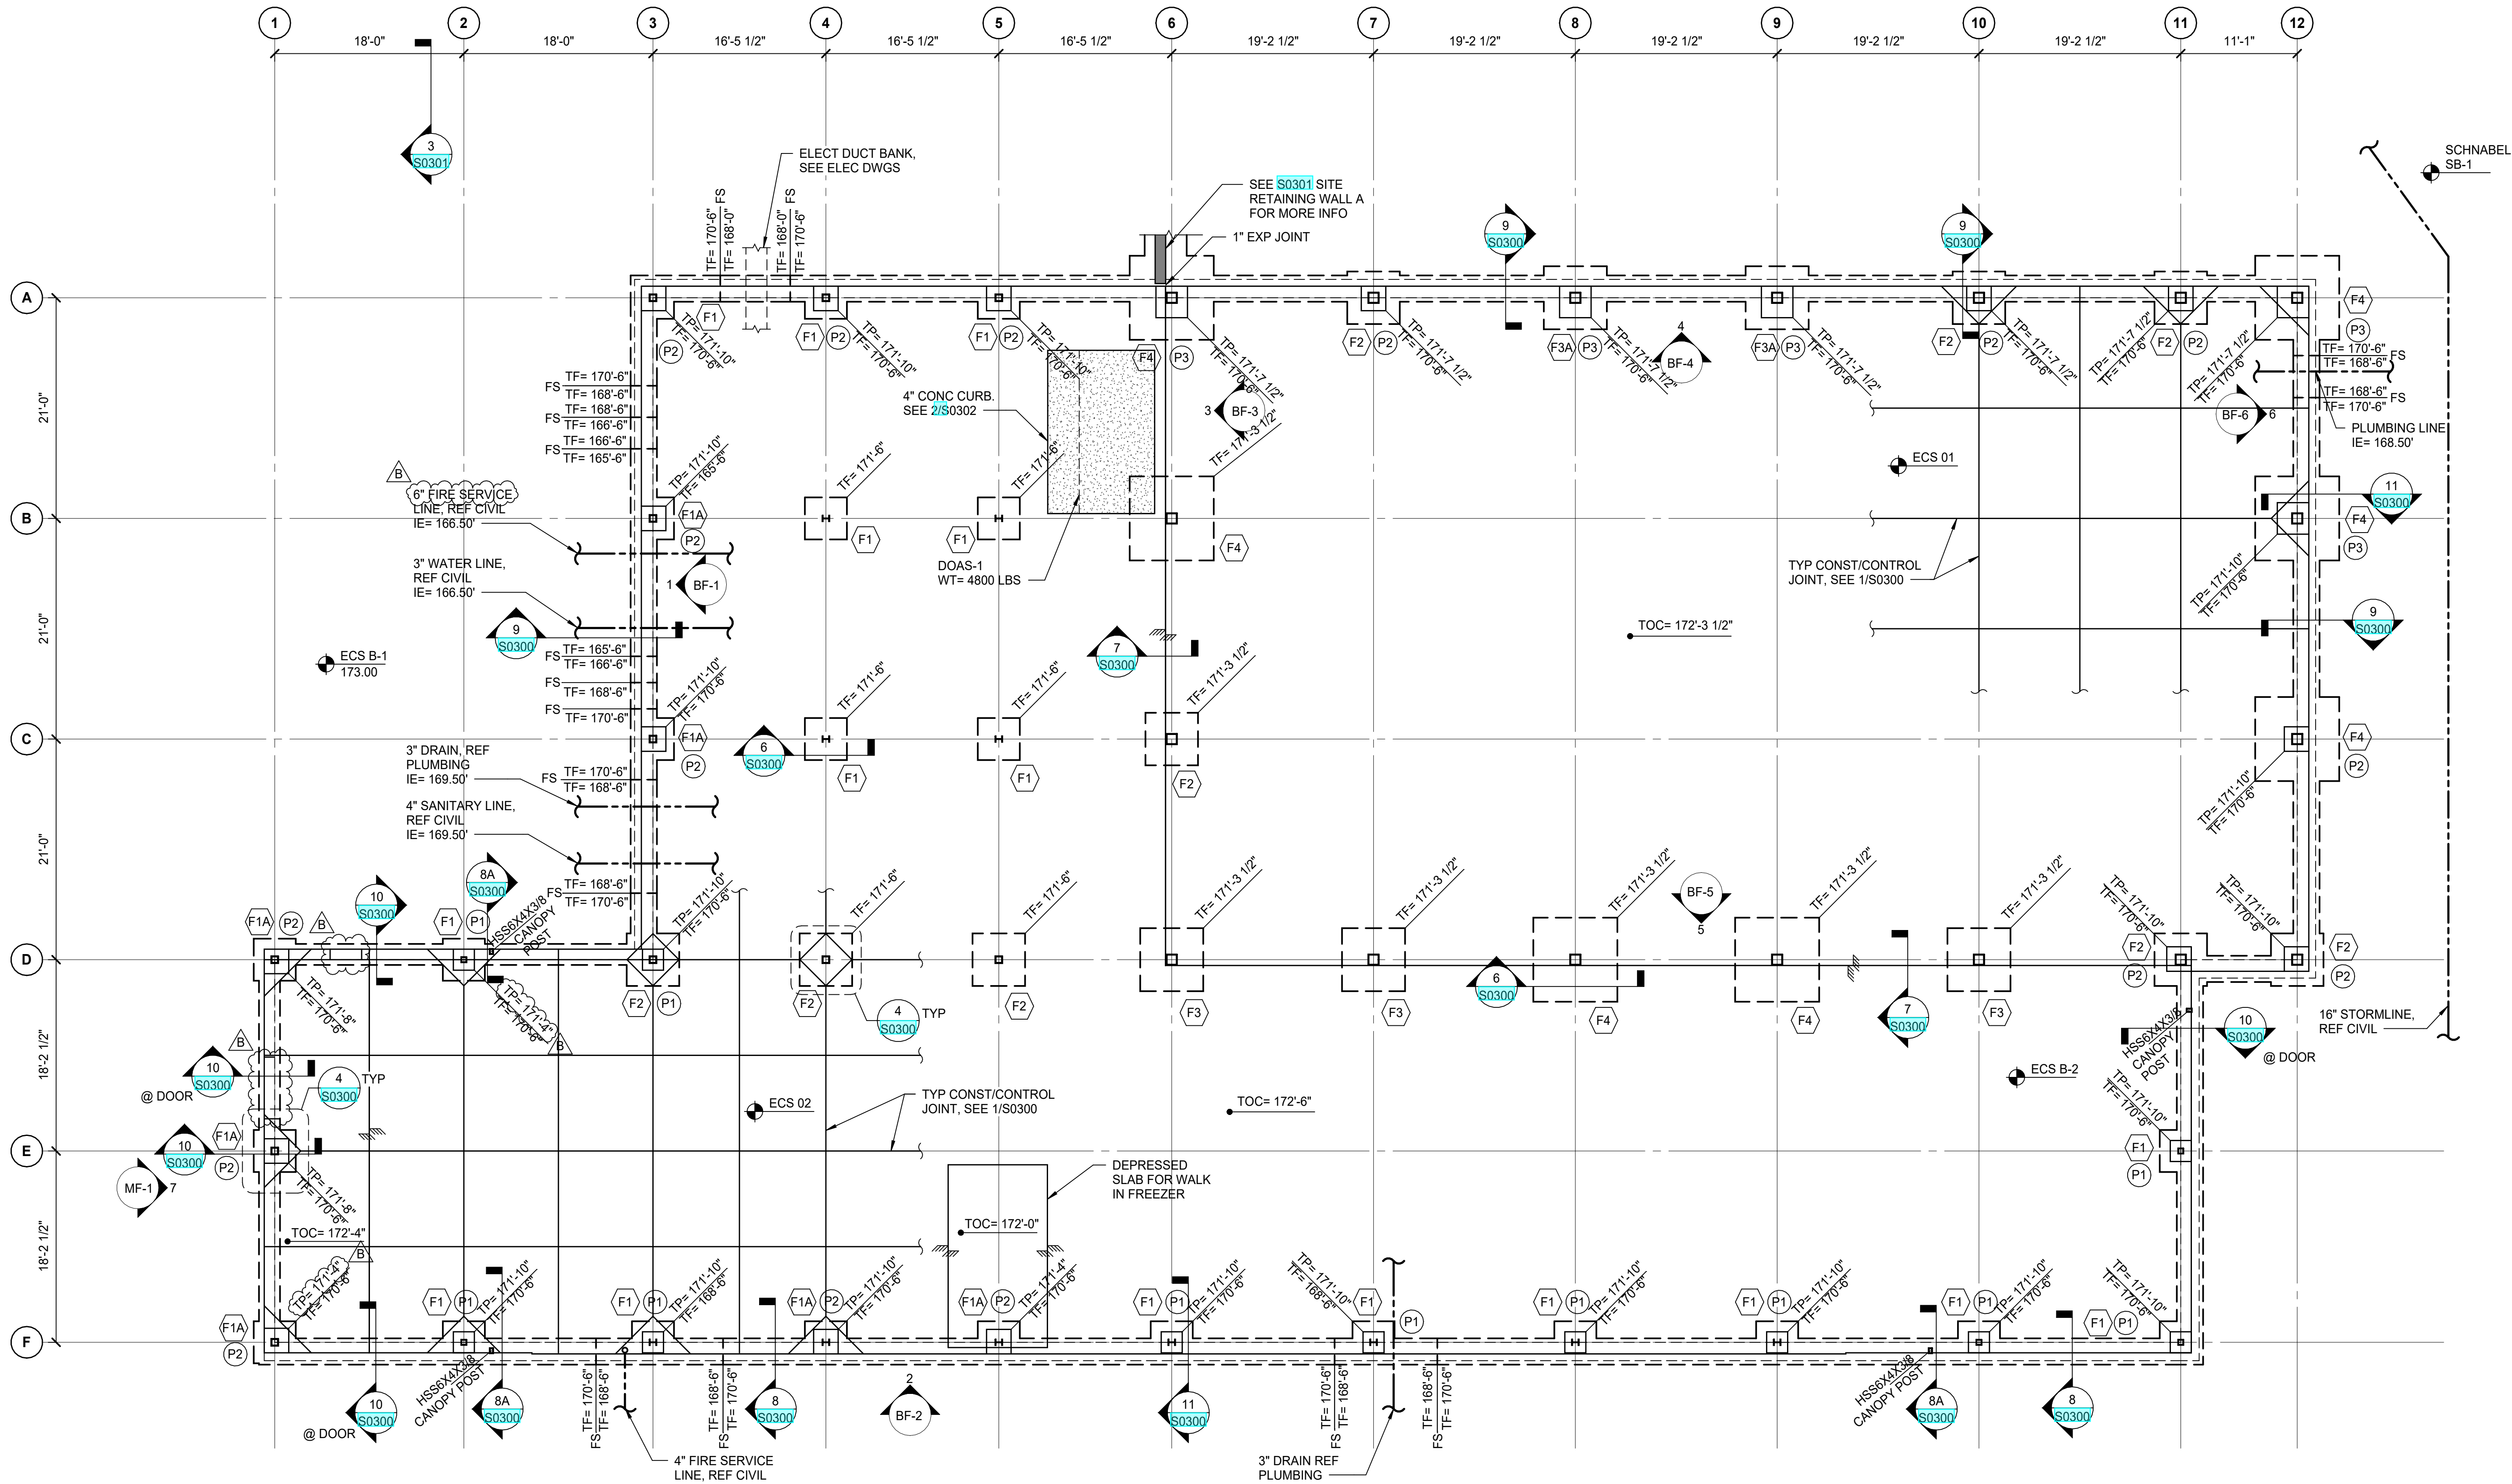

FOUNDATION PLAN

SCALE: 1/8" = 1'-0"

FOUNDATION NOTES:

1. TYPICAL FLOOR CONSTRUCTION: 5" CONCRETE SLAB-ON-GRADE REINFORCED WITH ONE LAYER OF 6x6-W2.1xW2.1 WWF IN THE TOP 1/3 OF SLAB ON 15 MIL VAPOR BARRIER PLACED ON 6" LAYER OF COMPACTED #57 STONE. EXTENTS OF SLAB SHOWN IS FOR GENERAL REFERENCE PURPOSES ONLY. SEE ARCHITECTURAL SLAB EDGE DRAWING FOR DIMENSIONS AND MORE INFO DRAWINGS FOR SLAB DIMENSION, AND EDGES.
2. PROVIDE CONTROL OR CONSTRUCTION JOINTS IN SLAB AT 12 TO 16 FEET OC BOTH DIRECTIONS. SEE 1/S0300
3. TOP OF CONCRETE (TOC) ELEVATION = VARIES , SEE PLAN.
4. TOP OF EXTERIOR PIER ELEVATION VARIES SEE PLAN
5. PLUMBING LINES BELOW THE SLAB ON GRADE ARE SHOWN FOR REFERENCE ONLY. REFER TO THE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION. SEE 6/S0300 FOR UTILITY LINE PLACEMENT NEAR FOOTINGS.
6. B-# DENOTES APPROXIMATE BORING LOCATION.
7. SEE 5/S0301 FOR TYPICAL SOIL UNDERCUT OPTIONS IF SOFT SOILS ARE ENCOUNTERED AT BOTTOM OF FOOTING ELEVATION



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS
RECREATION CENTER
611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE


Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056



ISSUE FOR CONSTRUCTION 2/18/2026


ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
FTG	REVISION	8/22/25
B	IFC REVISION	2/18/26

FOUNDATION PLAN

S0101

FILE NAME: C:\Users\williurel\Documents\Congress Heights Recreational Center_STRUC_villuierbryan.com.rvt
DATE: 3/24/2026 3:50:29 PM
DATE STAMP:

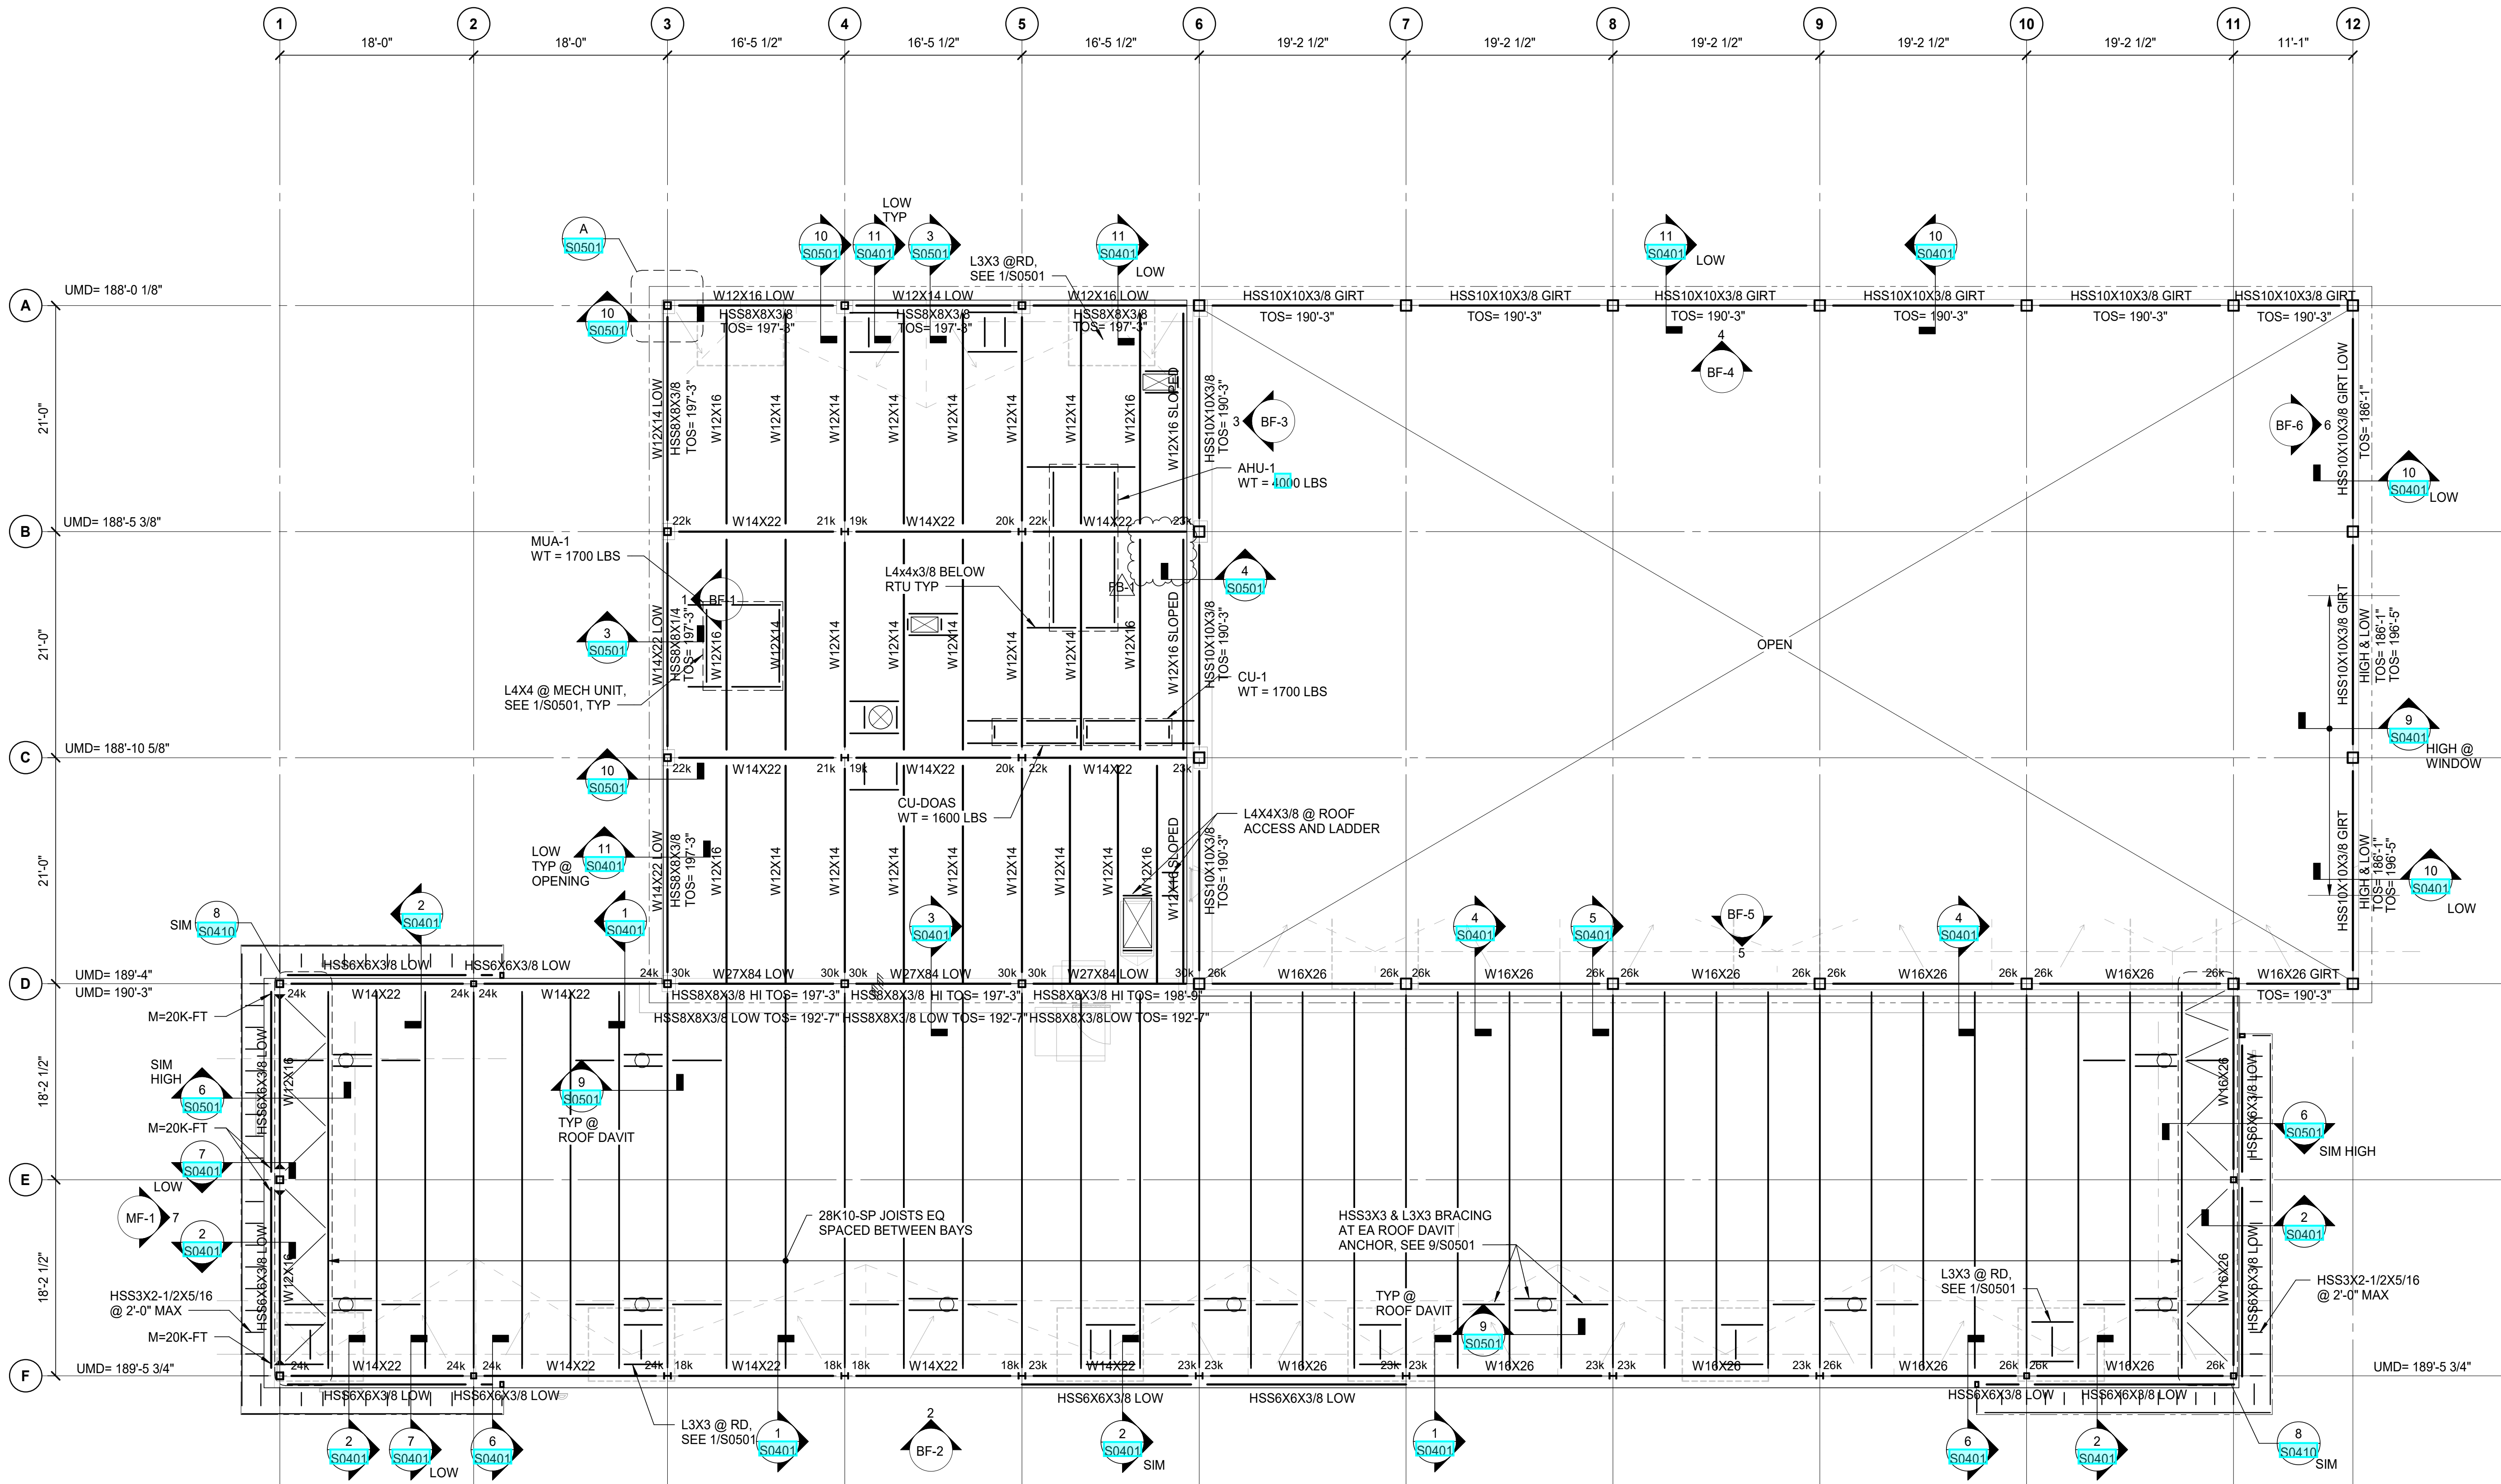

LOW ROOF FRAMING PLAN

SCALE: 1/8" = 1'-0"

ROOF FRAMING NOTES:

- TYPICAL FLOOR CONSTRUCTION: 1 1/2" - 22 GAGE WIDE RIB METAL ROOF DECK, CONTINUOUS 3 SPANS MINIMUM. DECKING TO BE GALVANIZED.
- UMD DENOTES UNDERSIDE OF METAL ROOF DECK ELEVATION. UNIFORMLY SLOPE STEEL BETWEEN ELEVATIONS SHOWN. BEAMS SUPPORTING JOISTS TO BE DROPPED FOR 2 1/2" FOR K SERIES JOIST SEATS AND 5" FOR LH SERIES JOIST SEATS. PROVIDE DEEPER JOIST SEATS WHERE INDICATED IN DETAILS.
- 16k AS SHOWN ON PLAN REPRESENTS GRAVITY LOAD FACTORED REACTIONS. LOADS LESS THAN 15k HAVE NOT BEEN SHOWN.
- JOIST WITH SP DESIGNATIONS SHALL BE DESIGNED FOR ADDITIONAL LOADINGS SHOWN.
- "BF-#" INDICATES BRACED FRAME - SEE S0410.
- SEE 11/S0401 FOR TYP BENT PLATE LOOSE LINTEL FOR BRICK VENEER SUPPORT.



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS RECREATION CENTER

611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehliert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056



ISSUE FOR CONSTRUCTION 2/18/2026


ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
FB-1	FIELD BULLETIN 1	3/24/2026

LOW ROOF FRAMING PLAN

S0102

C:\Users\jnilsson\Documents\Congress Heights Recreational Center_STRUC_jnilsson\REQQ.M
2/18/2026 3:43:53 PM
FILE NAME
USER NAME
DATE STAMP

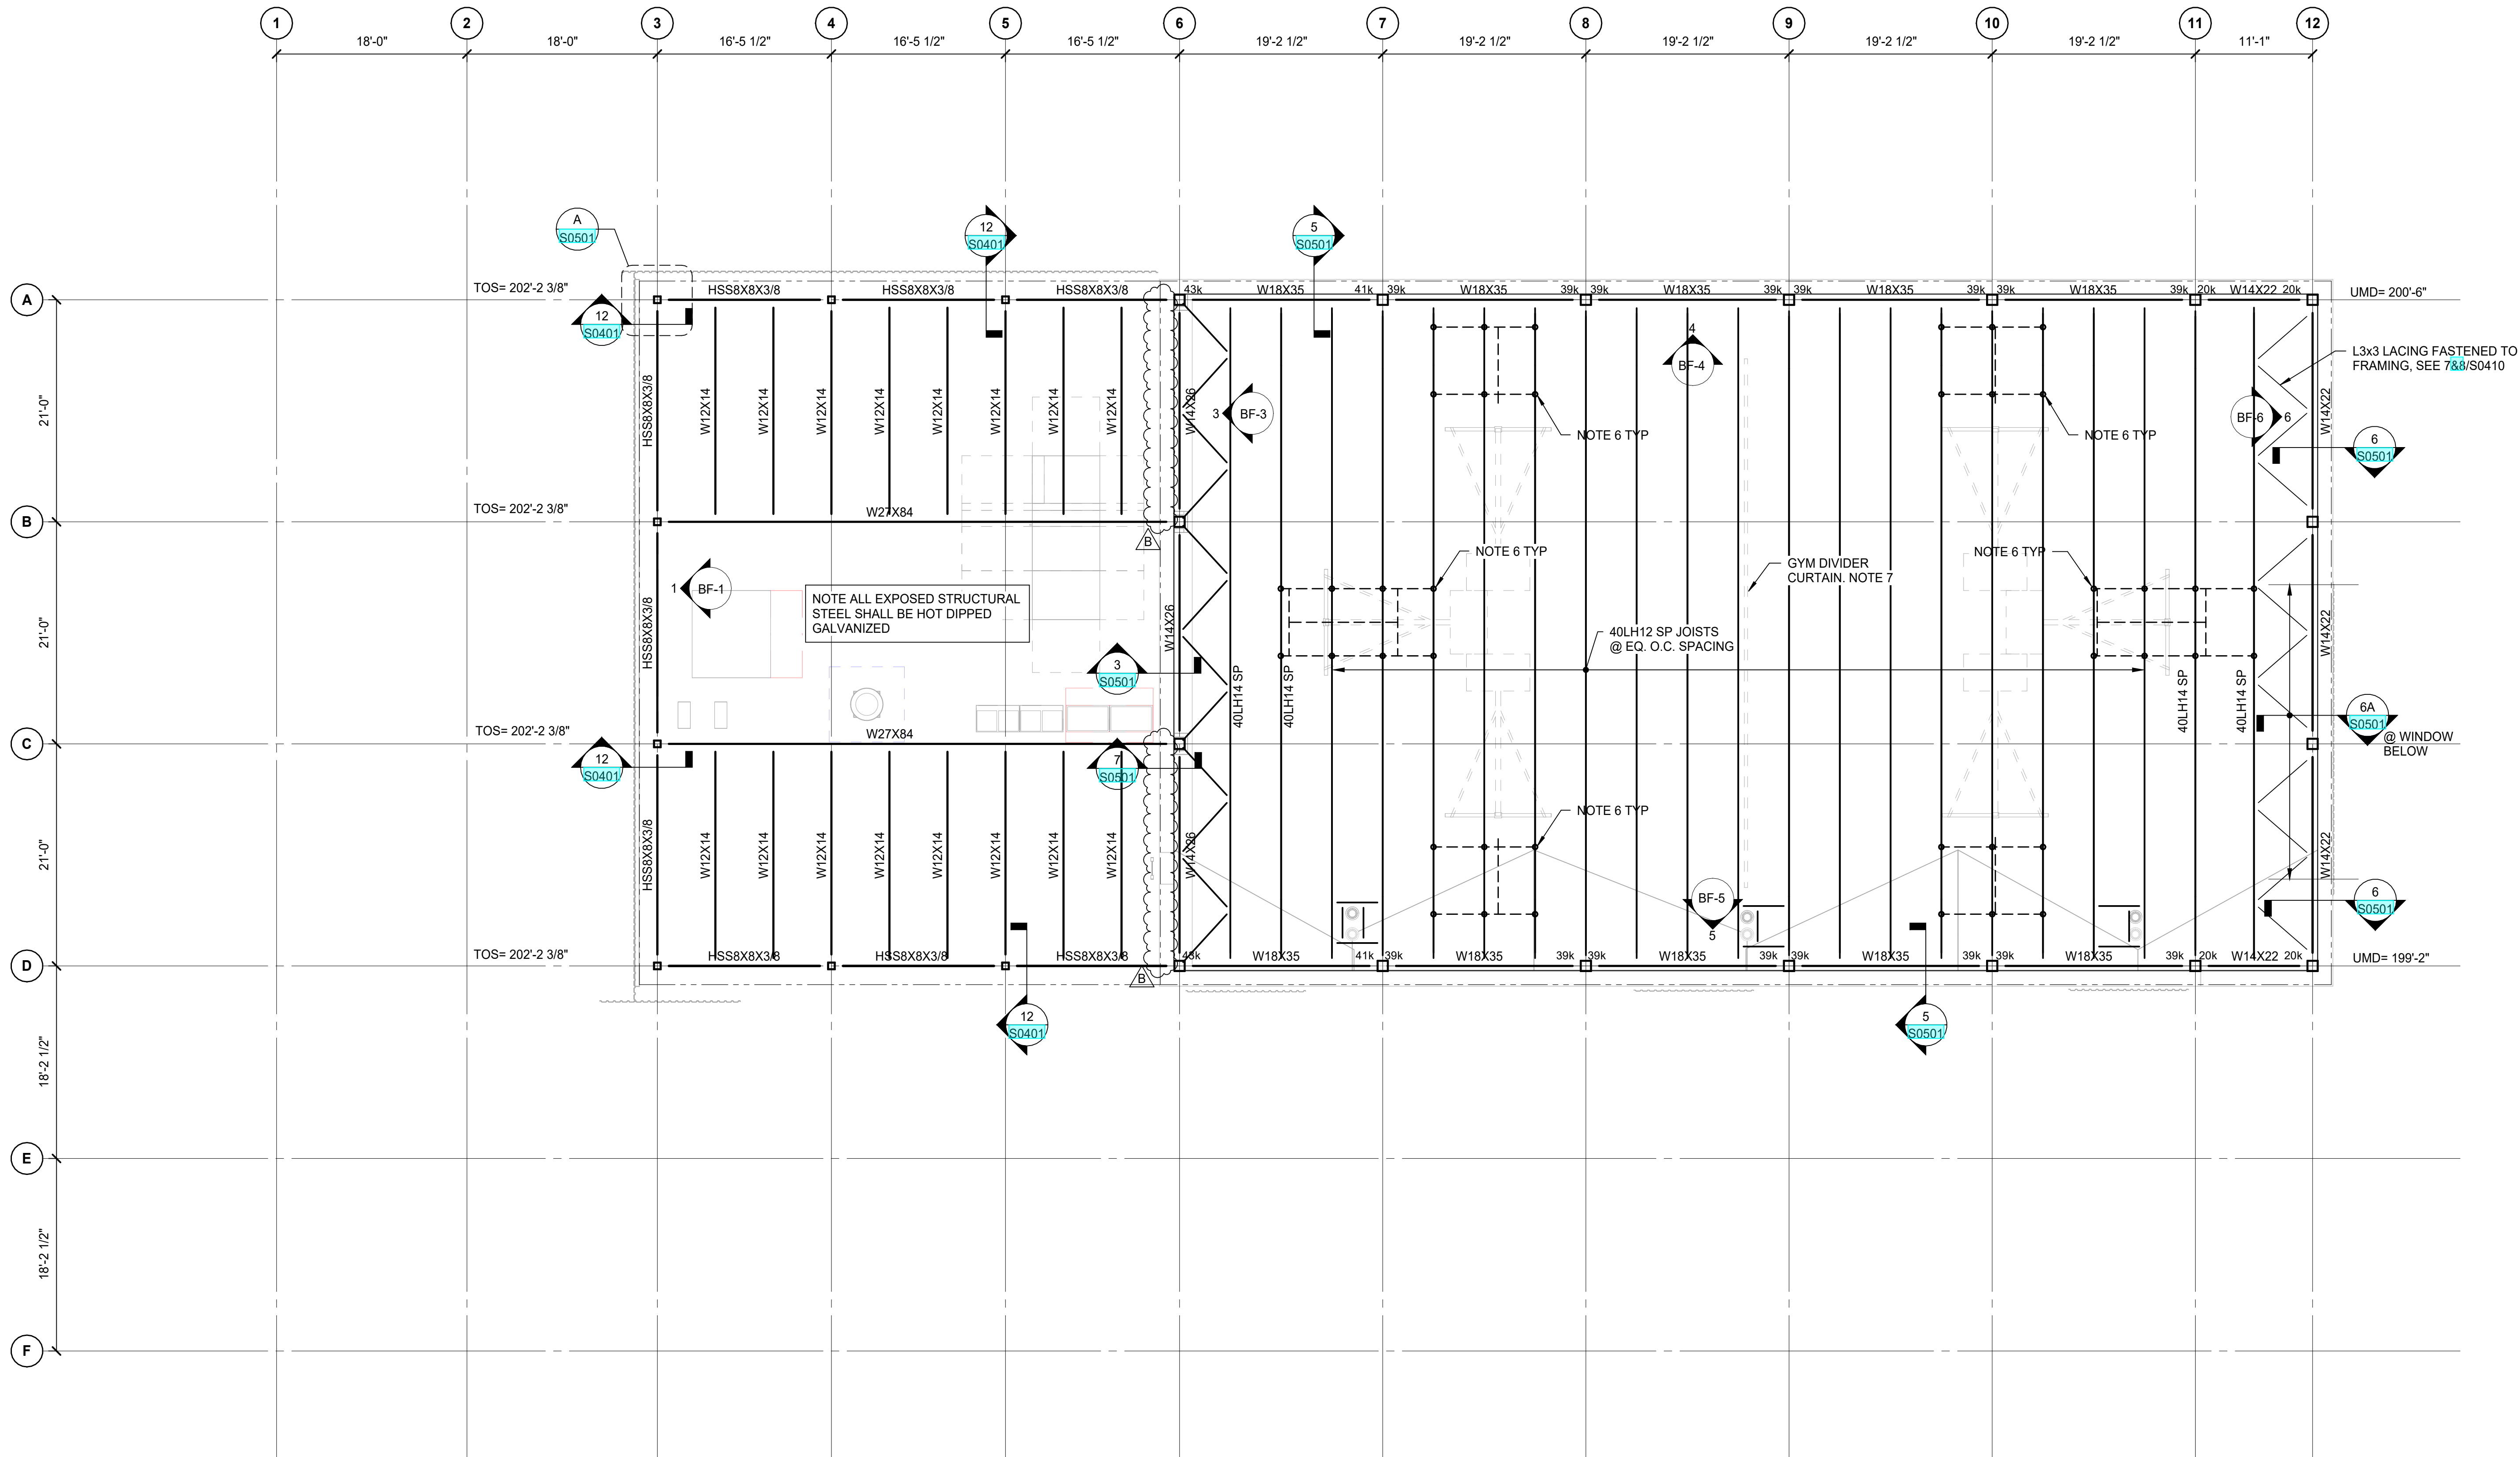

HIGH ROOF FRAMING PLAN

SCALE: 1/8" = 1'-0"

ROOF FRAMING NOTES:

- TYPICAL FLOOR CONSTRUCTION: 1 1/2" - 22 GAGE WIDE RIB METAL ROOF DECK, CONTINUOUS 3 SPANS MINIMUM. DECKING TO BE GALVANIZED.
- UMD DENOTES UNDERSIDE OF METAL ROOF DECK ELEVATION. UNIFORMLY SLOPE STEEL BETWEEN ELEVATIONS SHOWN. BEAMS SUPPORTING JOISTS TO BE DROPPED FOR 2 1/2" FOR K SERIES JOIST SEATS AND 5" FOR LH SERIES JOIST SEATS. PROVIDE DEEPER JOIST SEATS WHERE INDICATED IN DETAILS.
- 16k AS SHOWN ON PLAN REPRESENTS GRAVITY LOAD FACTORED REACTIONS. LOADS LESS THAN 15k HAVE NOT BEEN SHOWN.
- JOIST WITH SP DESIGNATIONS SHALL BE DESIGNED FOR ADDITIONAL LOADINGS SHOWN.
- "BF-#" INDICATES BRACED FRAME - SEE S0410.
- DENOTES APPROXIMATE BASKETBALL GOAL SUPPORT LOCATION.
ASSUMED BB POINT LOADS TYP EA CONN:
DL = 0.4K
LL = +1.1K OR -0.5K
- ASSUMED GYM DIVIDER CURTAIN WEIGHT = 20 PLF.
THE GC SHALL COORDINATE THE FINAL CURTAIN WEIGHT AND SUPPORT CONDITIONS WITH THE STEEL JOIST DESIGNER

GC TO COORDINATE THE FINAL LOADINGS AND LOCATIONS WITH THE BB SUPPLIER AND STEEL JOIST DESIGNER, TYP



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIO@MBDC.COM

CONGRESS HEIGHTS RECREATION CENTER

611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056




ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
B	IFC REVISION	2/18/26

HIGH ROOF FRAMING PLAN

S0103

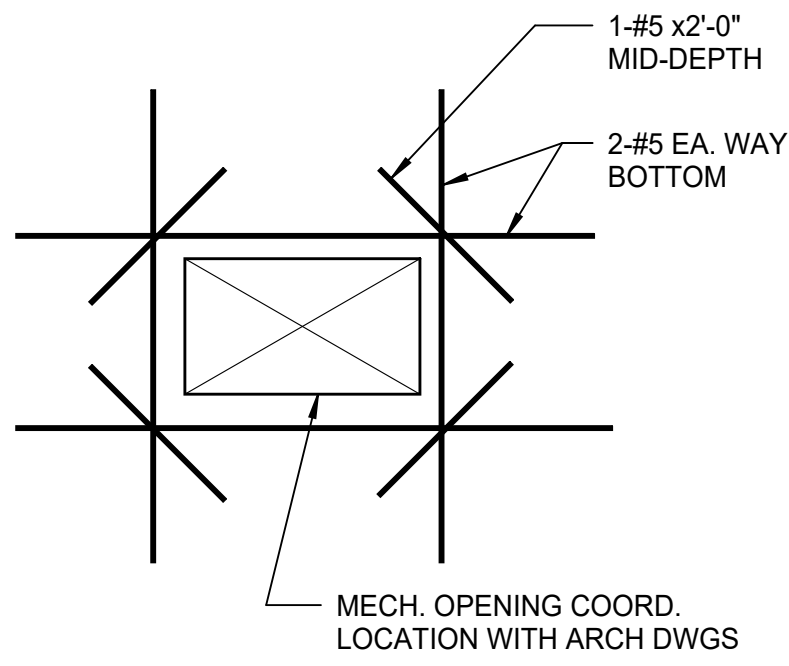


TYPICAL OPENING REINFORCEMENT
@ SLAB ON GRADE BLOCK-OUTS

DETAIL

SCALE: 1/2" = 1'-0"

3
S0300

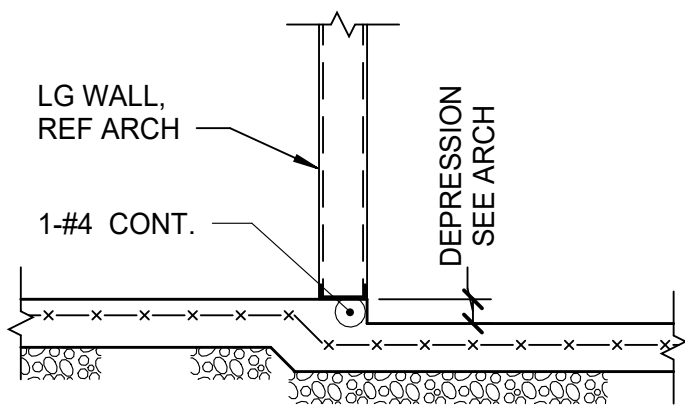


TYPICAL FLOOR DEPRESSION

SECTION

SCALE: 1/2" = 1'-0"

7
S0300

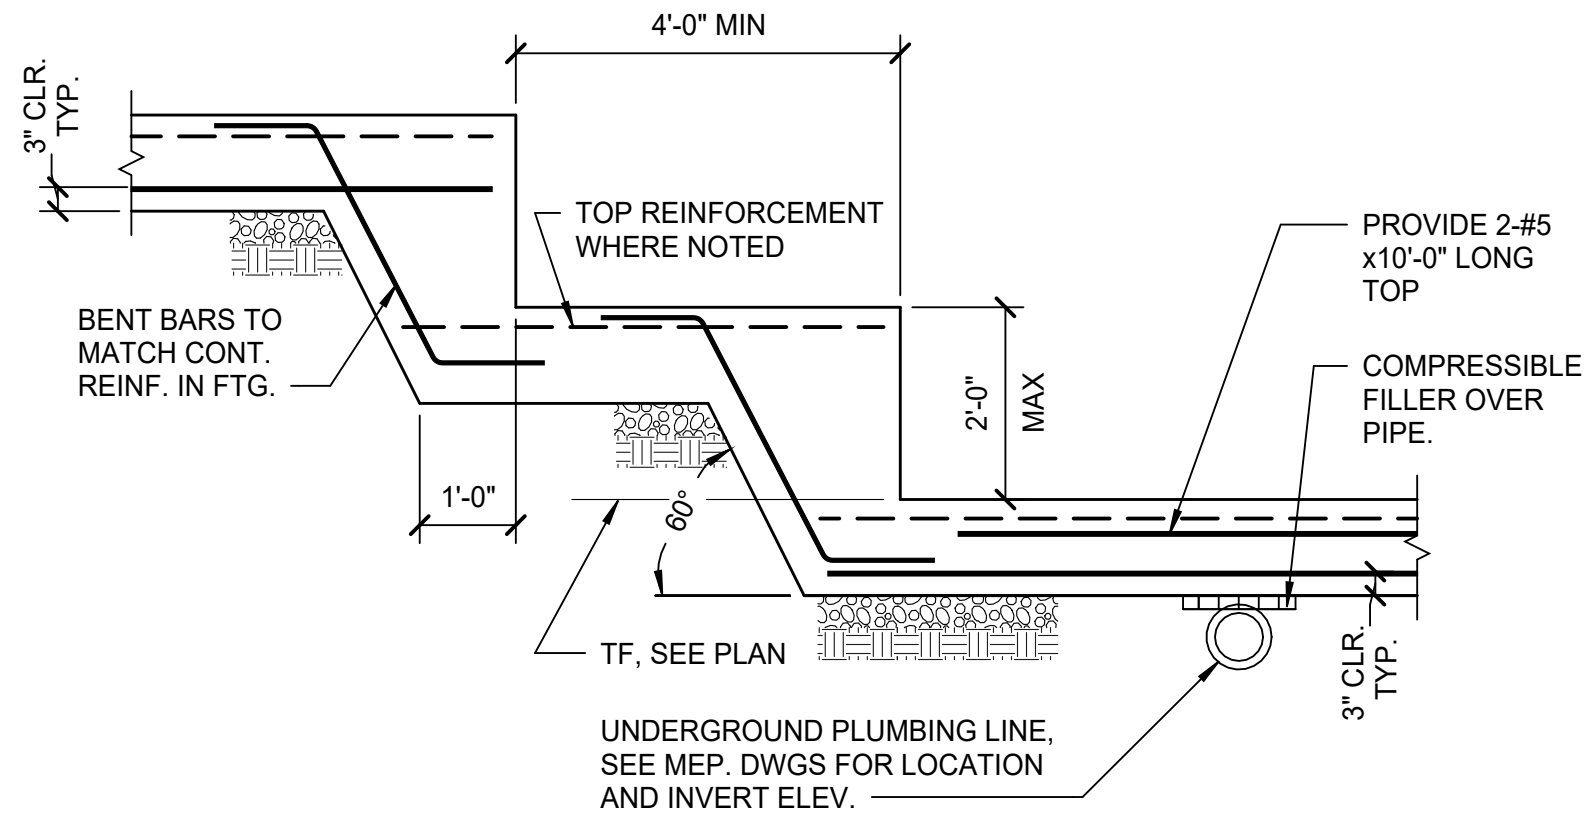


TYPICAL FOOTING STEP (F.S.)


SECTION

SCALE: 1/2" = 1'-0"

2
S0300

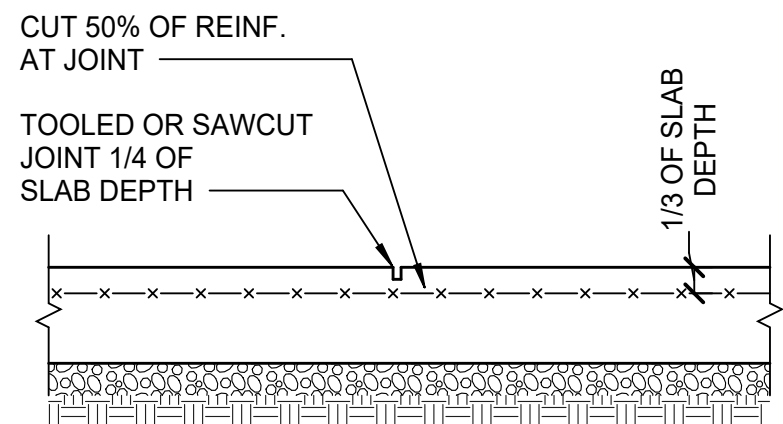

TYPICAL SLAB CONTROL JOINT

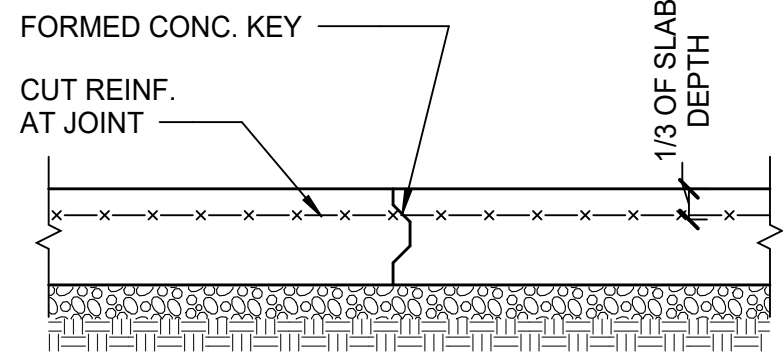

TYPICAL SLAB CONSTRUCTION JOINT


SECTION

SCALE: 1/2" = 1'-0"


1
S0300

FOOTING SCHEDULE			
MARK	SIZE	BOTTOM REINFORCING	REMARKS
F1	4'-0"x4'-0"x12"	4-#4 EW	
F1A	4'-0"x4'-0"x12"	4-#6 EW TOP & BOTT	
F2	5'-0"x5'-0"x14"	4-#5 EW	
F3	6'-0"x6'-0"x16"	6-#5 EW	
F3A	6'-0"x6'-0"x16"	9-#5 EW TOP & BOTT	
F4	8'-0"x8'-0"x20"	12-#7 EW TOP & BOTT	

PIER SCHEDULE				
MARK	SIZE	REINFORCING		REMARKS
		VERTICAL	TIES	
P1	24x24	8#6	#4 @ 10" OC	
P2	30x30	8#8	#4 @ 12" OC	
P3	36x36	12#8	#4 @ 12" OC	

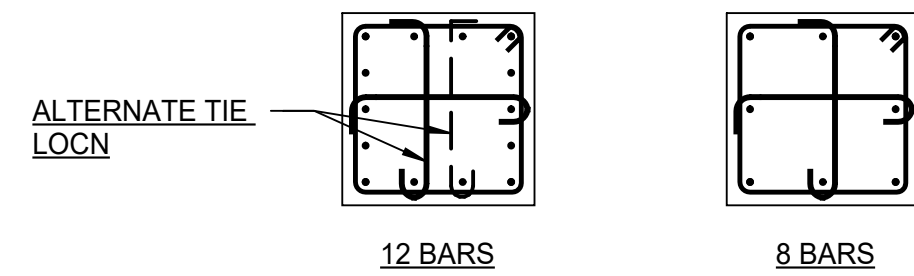

TIE ARRANGEMENT

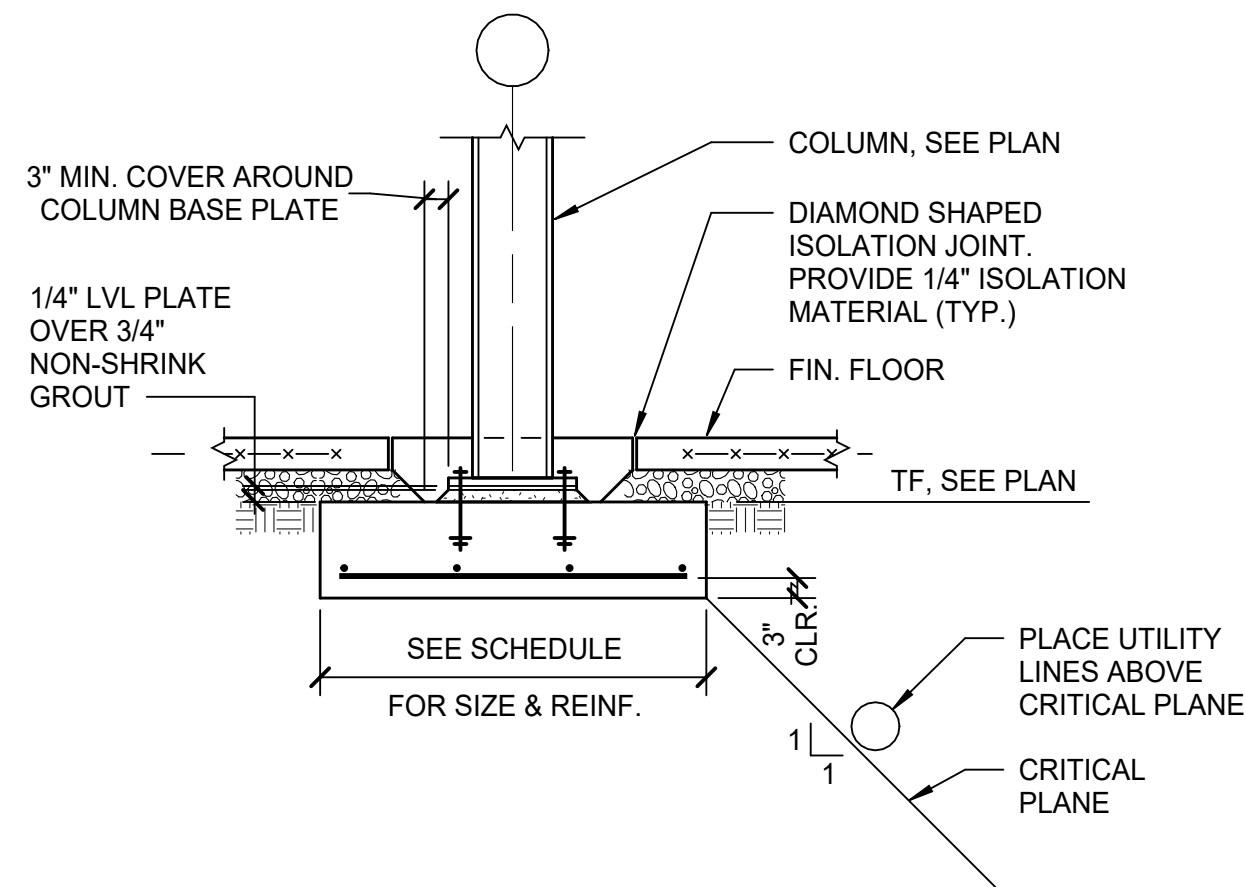


TYPICAL INTERIOR COLUMN FOOTING

SECTION

SCALE: 1/2" = 1'-0"

6
S0300

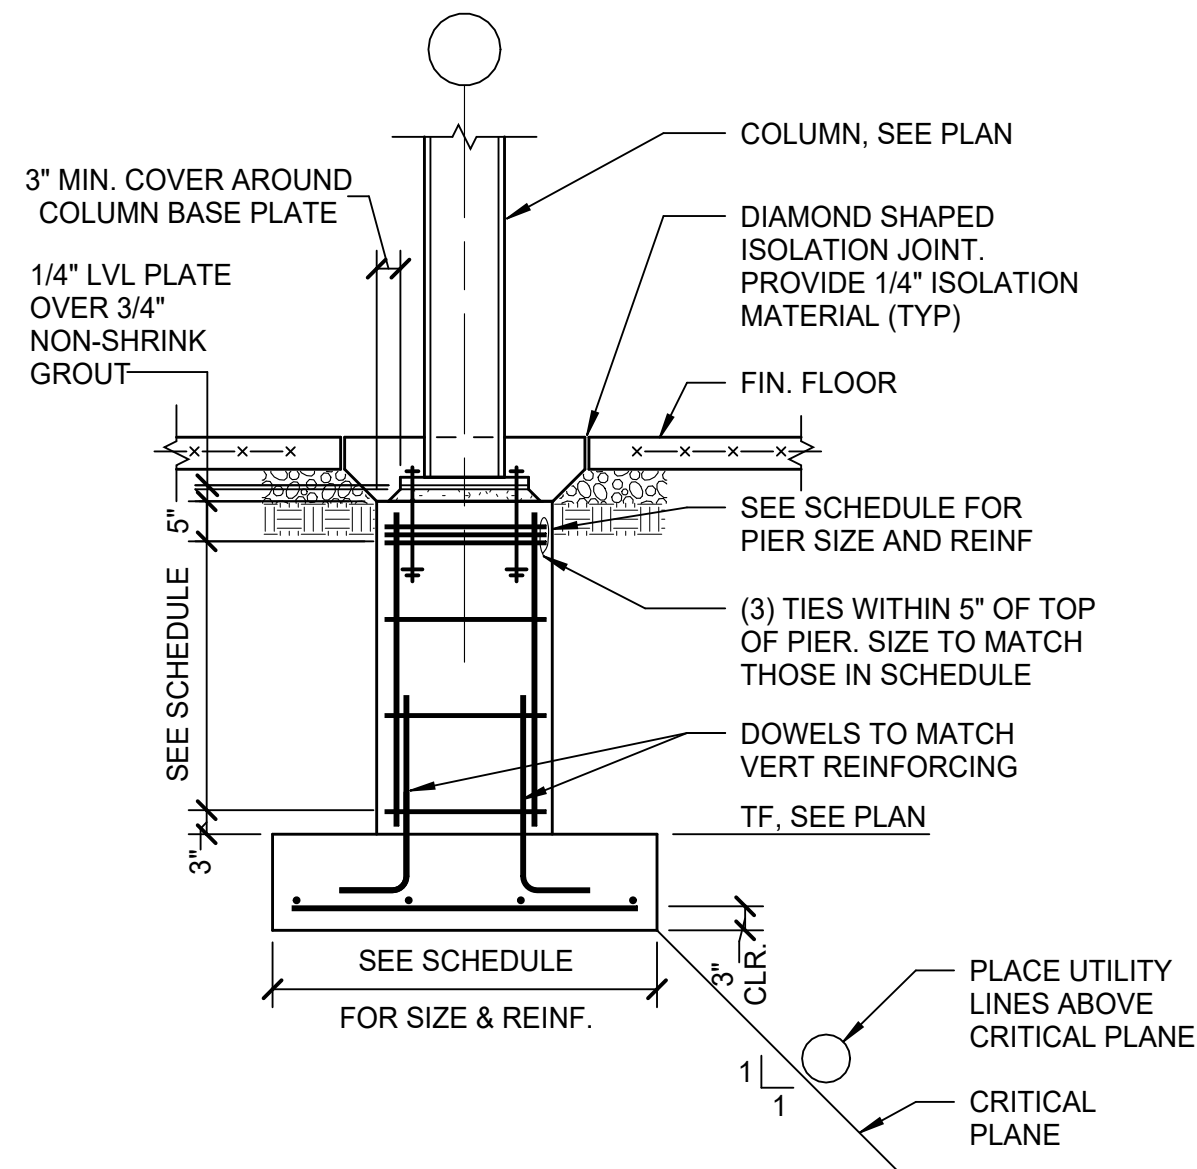


TYPICAL INTERIOR COLUMN FOOTING w/ PIER

SECTION

SCALE: 1/2" = 1'-0"

5
S0300

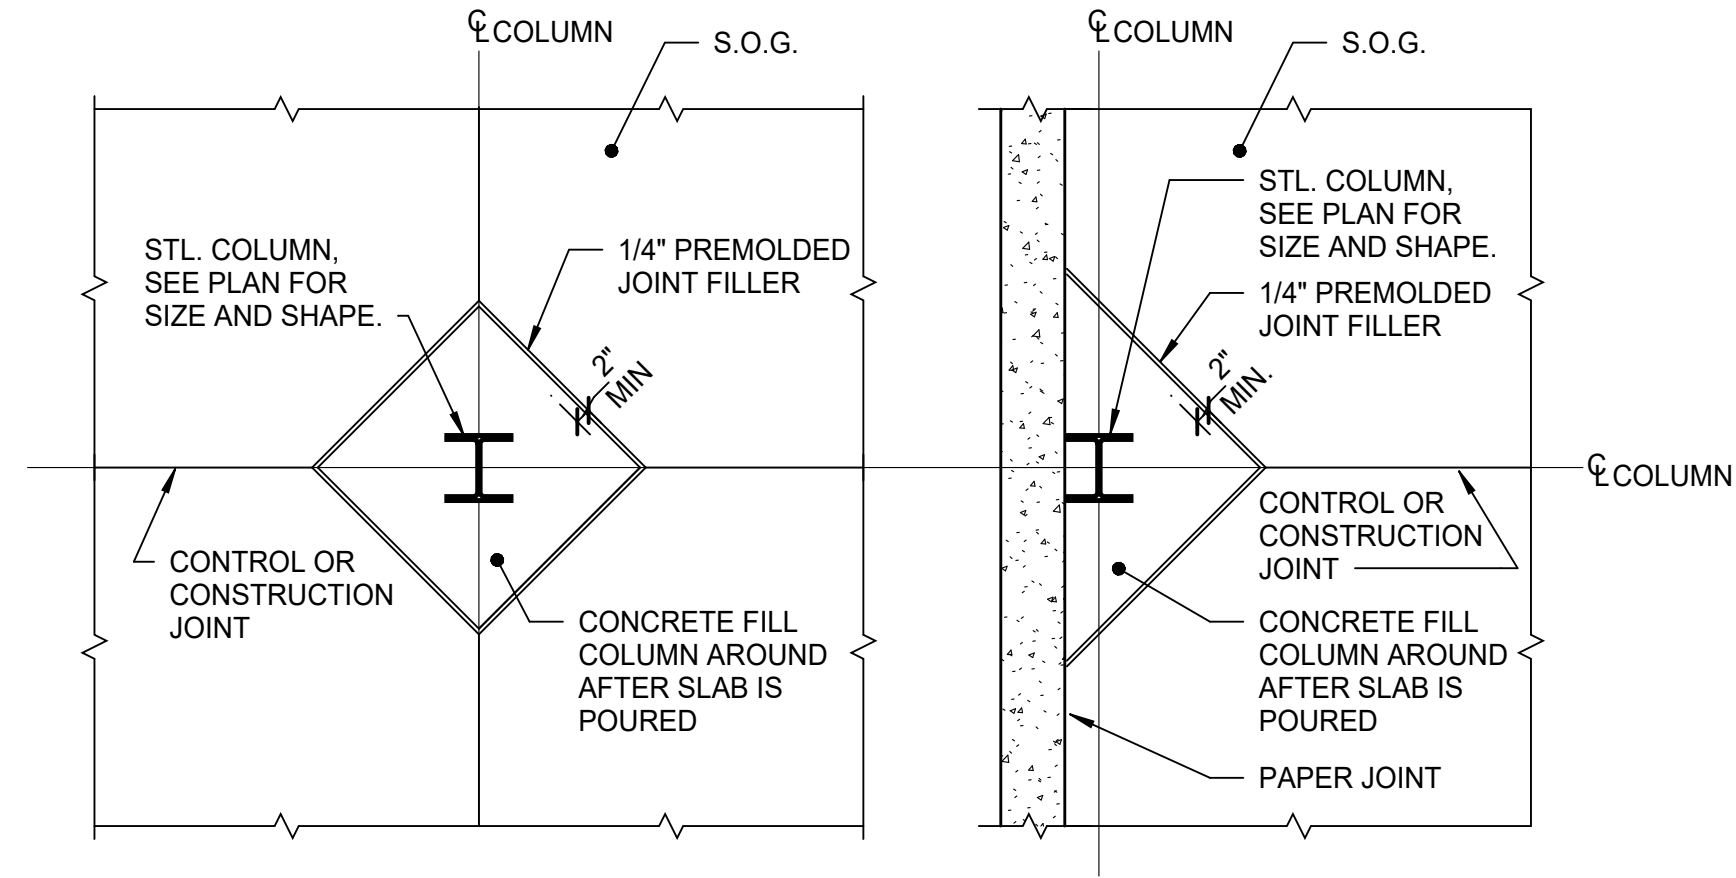


(INTERIOR COLUMN)
ISOLATION JOINT DETAIL

(PERIMETER COLUMN/WALL)
ISOLATION JOINT DETAIL

DETAIL

SCALE: 1/2" = 1'-0"


4
S0300

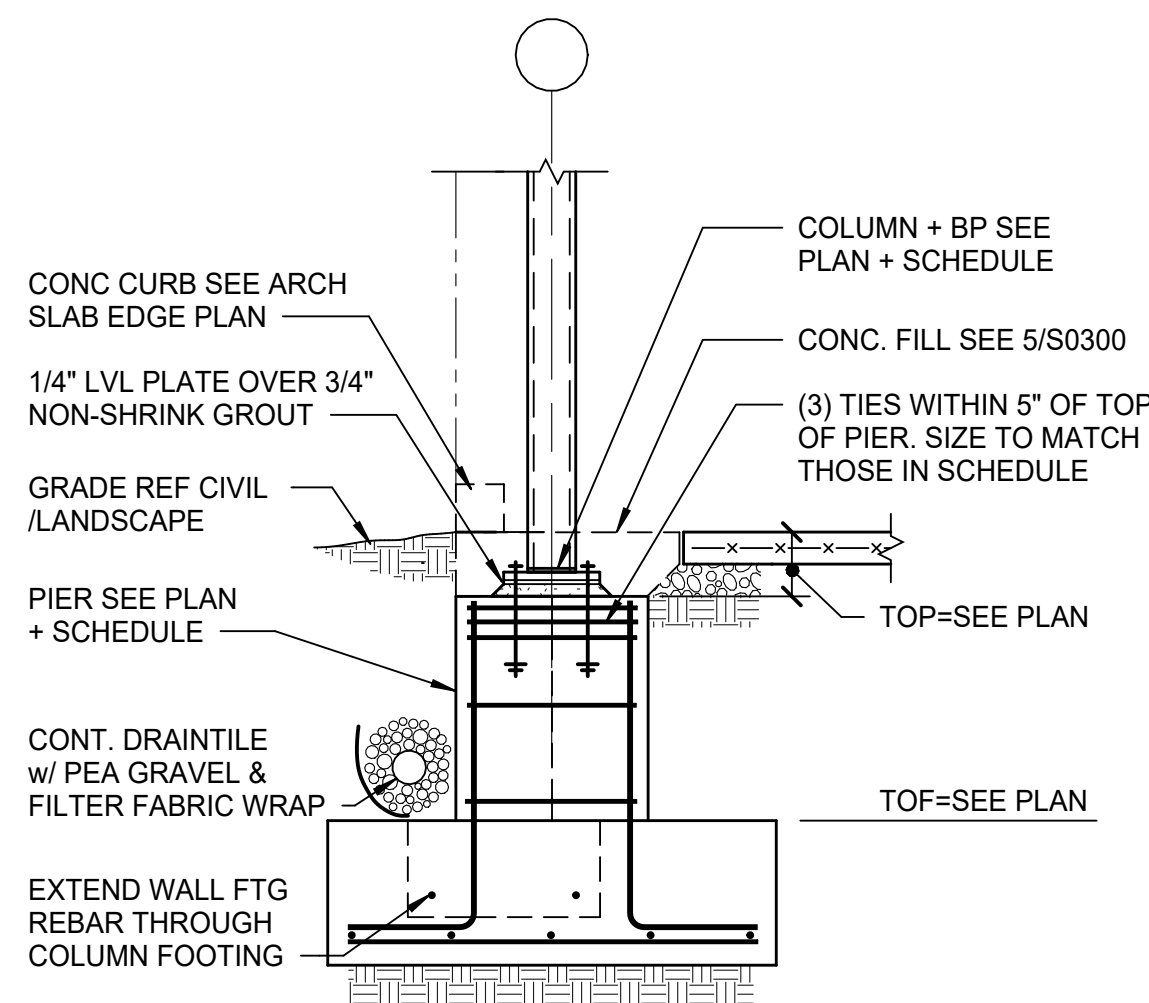

SECTION

SCALE: 1/2" = 1'-0"


11
S0300

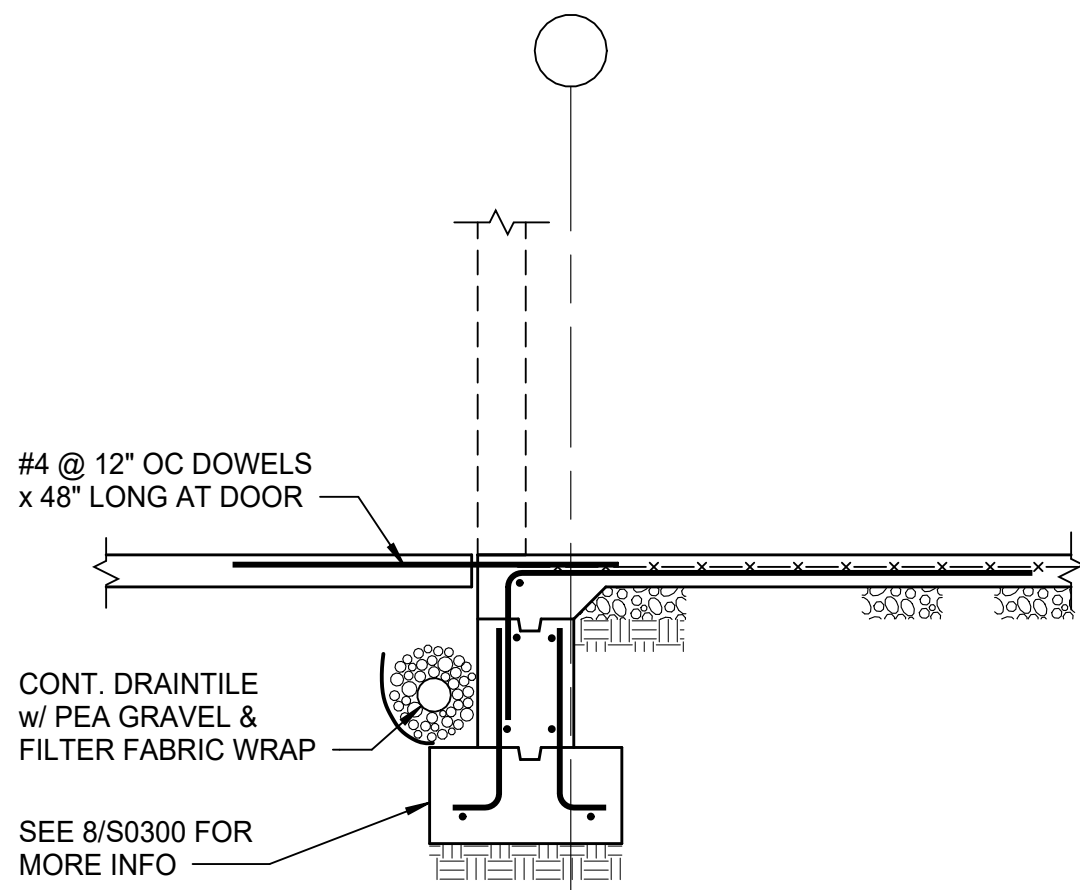

SECTION

SCALE: 1/2" = 1'-0"


10
S0300

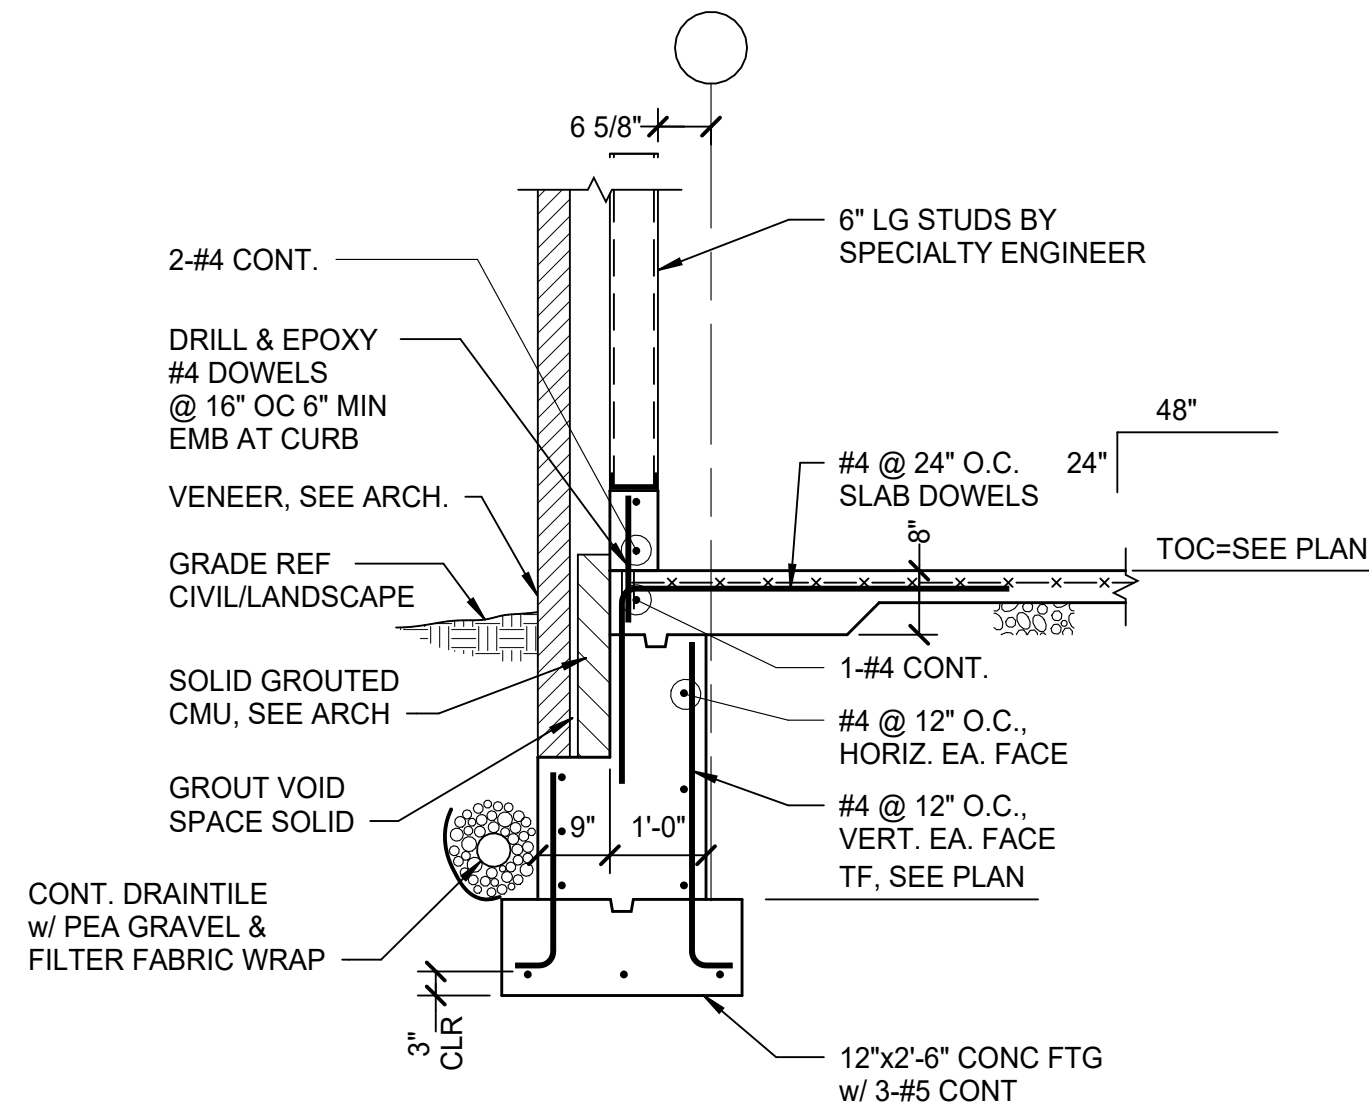

SECTION

SCALE: 1/2" = 1'-0"

9
S0300

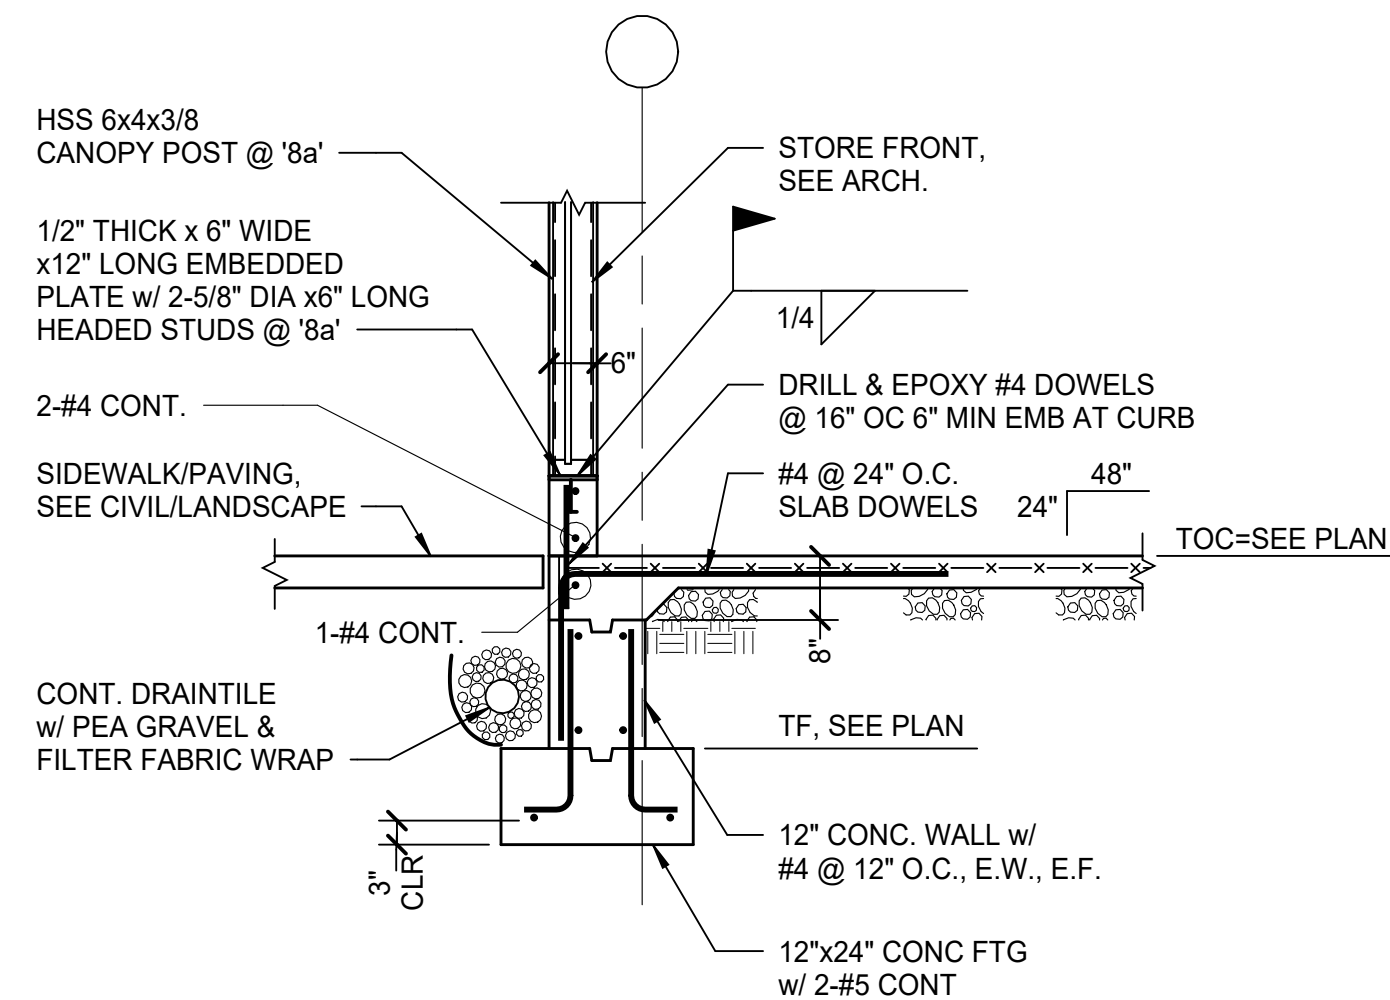

SECTION

SCALE: 1/2" = 1'-0"

8
S0300

8A
S0300



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS RECREATION CENTER

611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056

ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
	FTG REVISION	8/22/25

FOUNDATION SECTIONS

S0300

TYPICAL FOOTING UNDERCUT

SECTION

SCALE: 1/2" = 1'-0"

SECTION

SCALE: 1/2" = 1'-0"

SECTION

SCALE: 1/2" = 1'-0"

TYPICAL REINFORCING AT WALL INTERSECTIONS

TYPICAL CONCRETE STAIRS

FOUNDATION - SITE RETAINING WALL A

SCALE: 1/8" = 1'-0"

FOUNDATION - SITE RETAINING WALL B

SCALE: 1/8" = 1'-0"

SITE WALL PLAN

SCALE: 1" = 30'-0"

FOUNDATION - SITE RETAINING WALL C

SCALE: 1/8" = 1'-0"

CONGRESS HEIGHTS
RECREATION CENTER

611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056




ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
	FTG REVISION	8/22/25

FOUNDATIONS

S0301

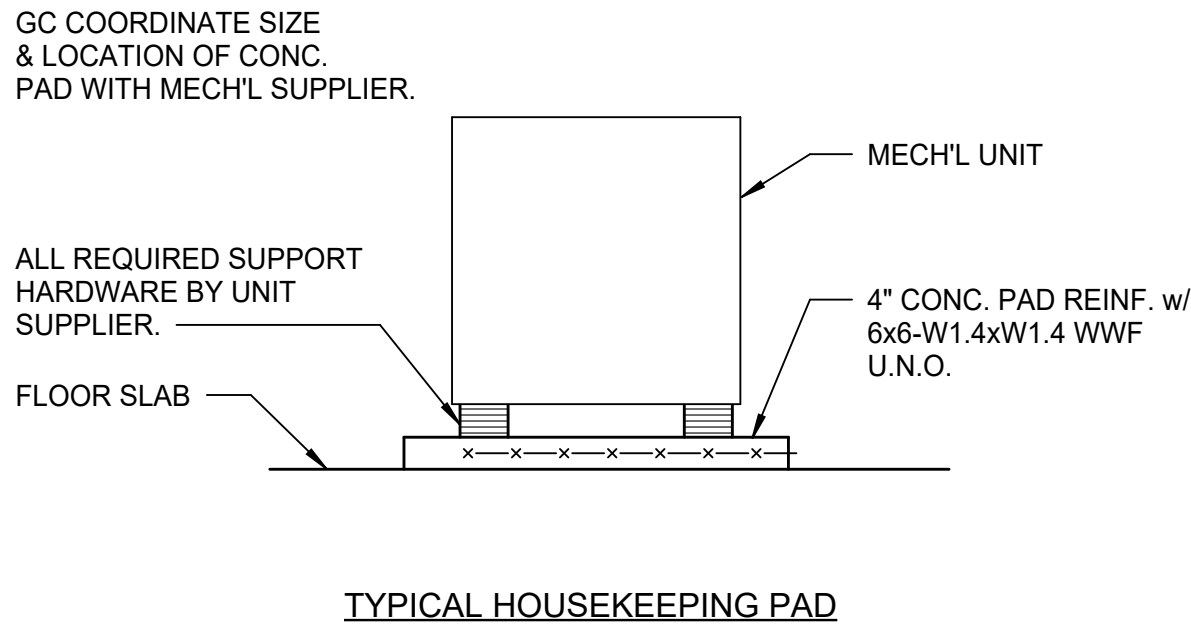


SECTION 2
SCALE: 1/2" = 1'-0" S0302

LIGHT POLE FOUNDATION SCHEDULE				
POLE HEIGHT ABOVE GRADE, 'H'	≤13'-11"	14'-0" TO 17'-11"	18'-0" TO 25'-0"	H > 25'-1"
BASE DIAMETER	24"Ø	24"Ø	24"Ø	CONTACT ENGINEER
EMBEDMENT DEPTH	4'-0"	4'-6"	5'-6"	CONTACT ENGINEER
REINFORCING VERT & TIES	8-#5 VERT. #3 @ 12" O.C. TIES	8-#5 VERT. #3 @ 12" O.C. TIES	8-#5 VERT. #3 @ 12" O.C. TIES	CONTACT ENGINEER

NOTES:

- ALLOWABLE SOIL BEARING CAPACITY Q ALL = 1500 PSF MIN.
- CONC. STRENGTH TO BE 3000 PSI w/ 6% AIR ENTRAINMENT.
- PROVIDE 3" CLEAR COVER ALL AROUND.
- COORDINATE ELECTRICAL REQUIREMENTS PRIOR TO CASTING FOUNDATIONS, SEE ELECTRICAL DWG FOR MORE INFO.
- SEE ELECTRICAL DWGS FOR MIN. HEIGHT REQUIREMENTS ABOVE GRADE, ANCHOR BASE AND BREAKAWAY COUPLING REQUIREMENTS, AND OTHER INFO NOT SHOWN.
- NOTE - THIS SCHEDULE IS NOT FOR ATHLETE FIELD LIGHTINGS.

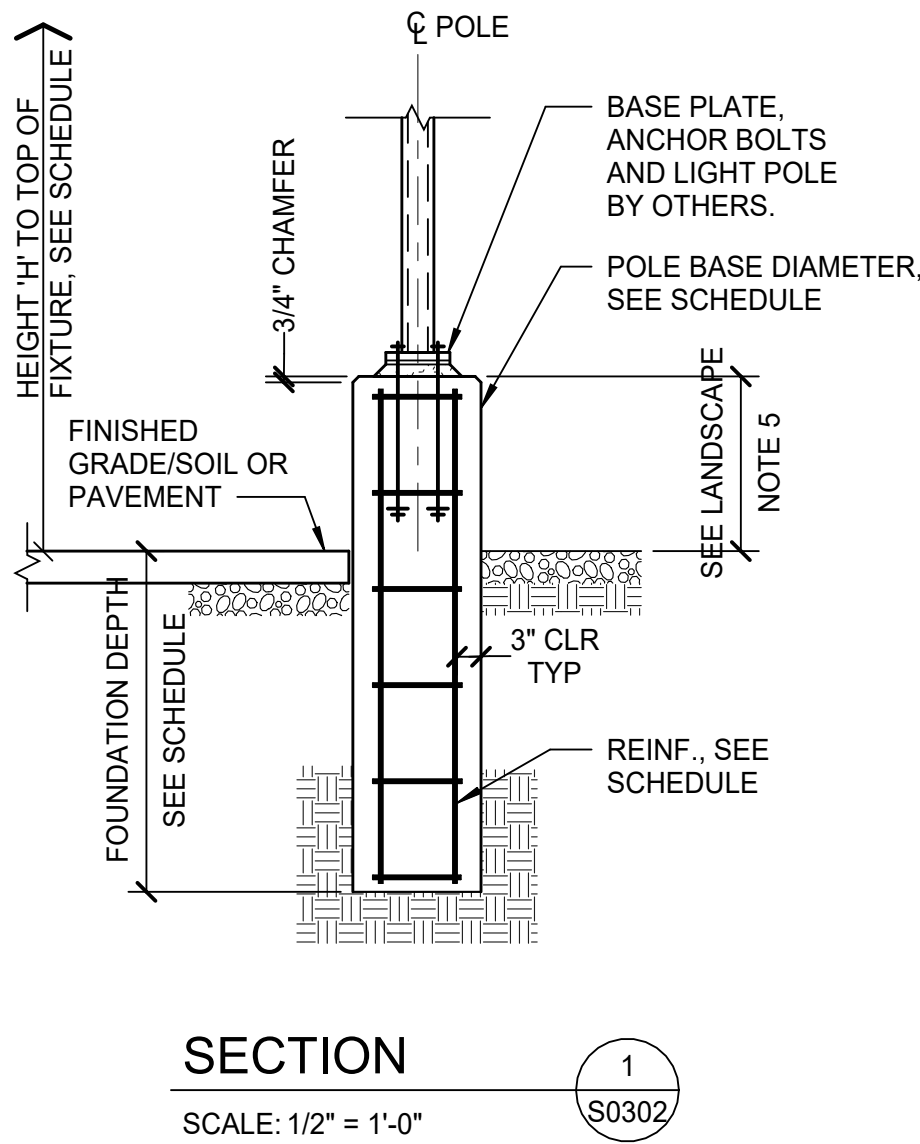

CONGRESS HEIGHTS RECREATION CENTER
611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL
AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE
Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP
Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE
BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056






ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS		
NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025

FOUNDATION SECTIONS

S0302


COLUMN SCHEDULE						
	C-5A	C-4A	C-3A	C-2A C-2B	C-1A C-1B C-1C	MARK FLOOR
						HIGH ROOF
						LOW ROOF
						FOUNDATION
	18"x18"x3/4"	18"x18"x3/4"	20"x20"x3/4"	20"x20"x3/4"	@ "A" & "B" 24"x24"x3/4" @ "C" 24"x30"x3/4"	BASE PLATE
	(4)3/4" DIA. x12" LONG	(4)3/4" DIA. x12" LONG	(4)3/4" DIA. x12" LONG	(4)3/4" DIA. x12" LONG	(4)3/4" DIA. x12" LONG	ANCHOR BOLTS
	@ "A" REFER TO BP-A	@ "A" REFER TO BP-A	@ "A" REFER TO BP-A	@ "A" REFER TO BP-A @ "B" REFER TO BP-B	@ "A" REFER TO BP-A @ "B" REFER TO BP-B @ "C" REFER TO BP-C	REMARKS

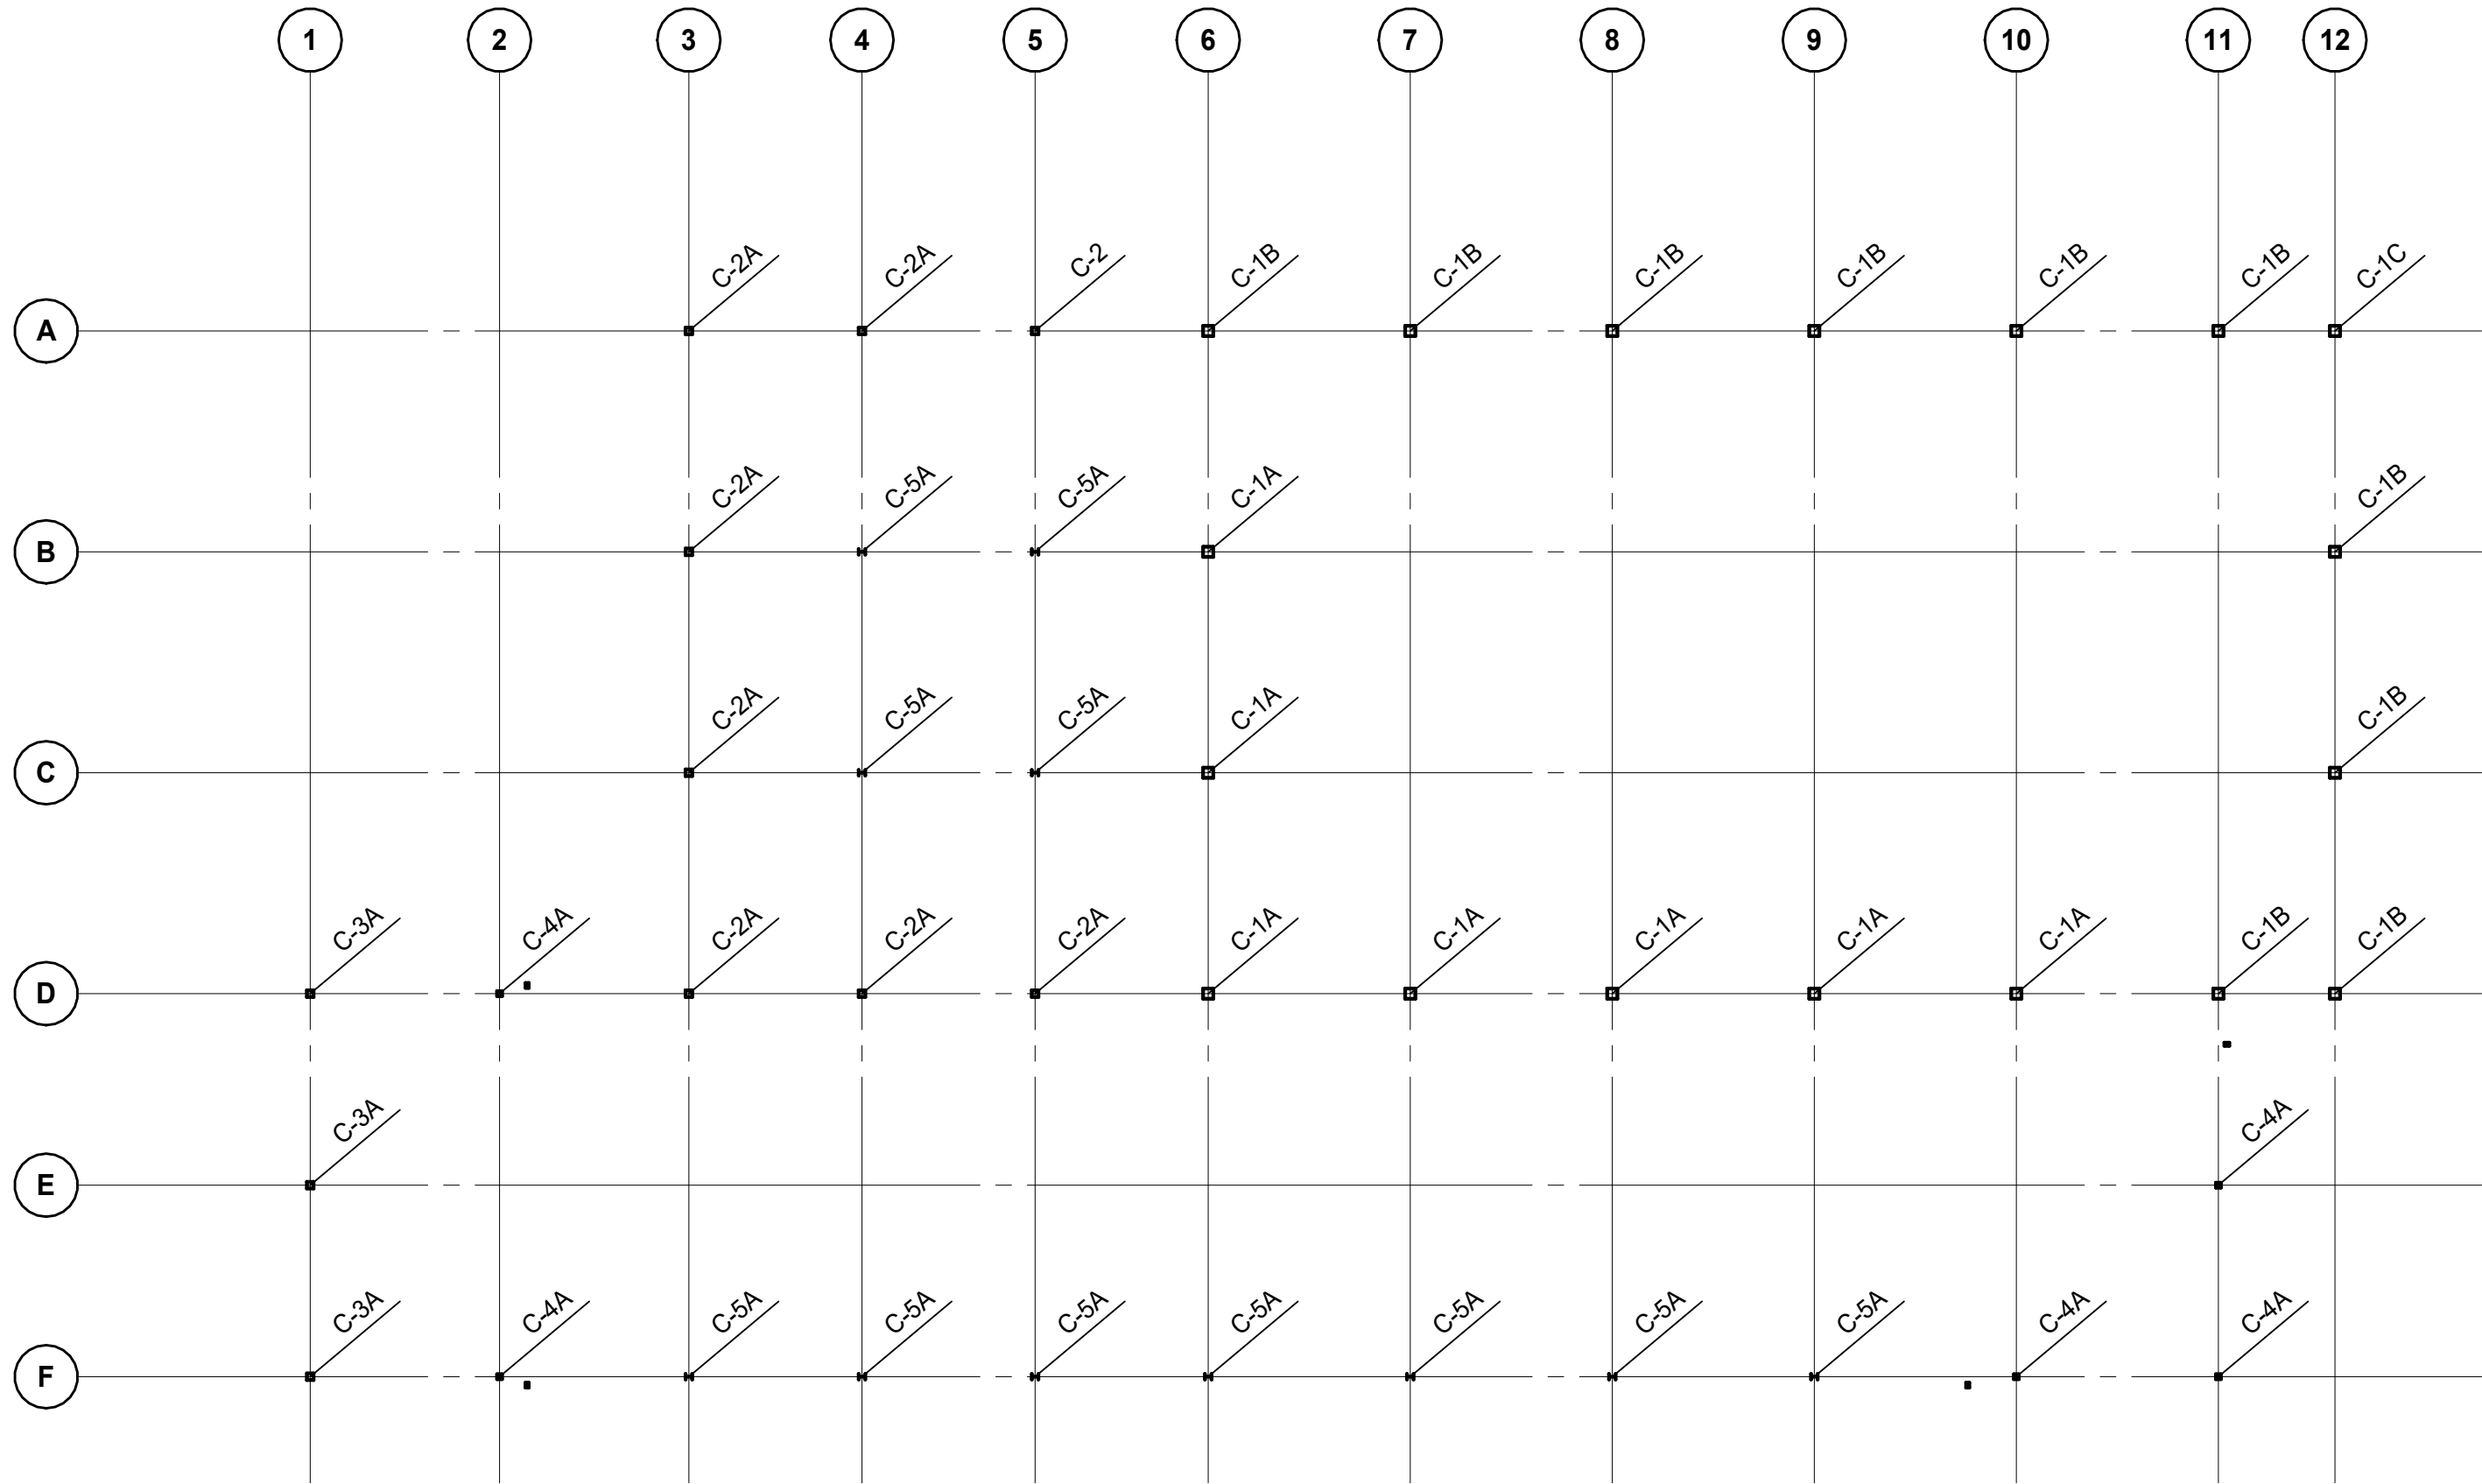

COLUMN LOCATION PLAN

SCALE: 1/16" = 1'-0"

A
S0400

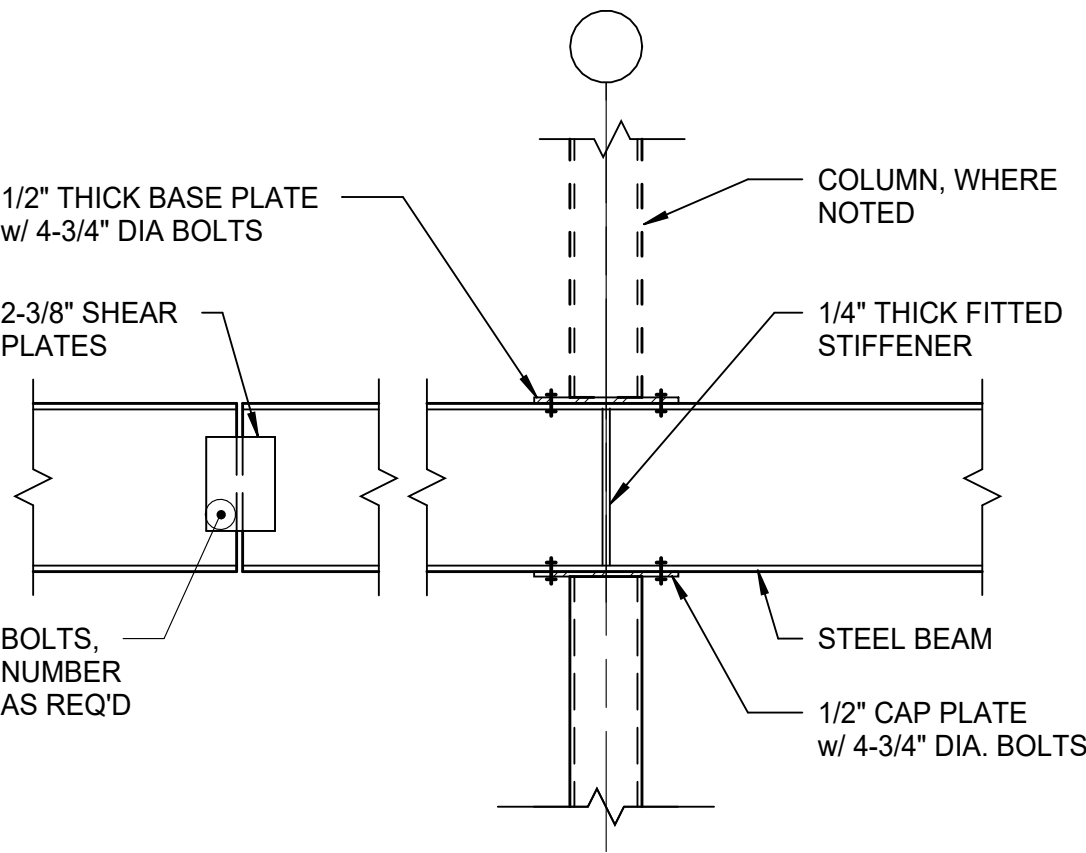


TYPICAL COLUMN TO CONTINUOUS BEAM CONNECTION


SECTION

SCALE: 3/4" = 1'-0"


2
S0400

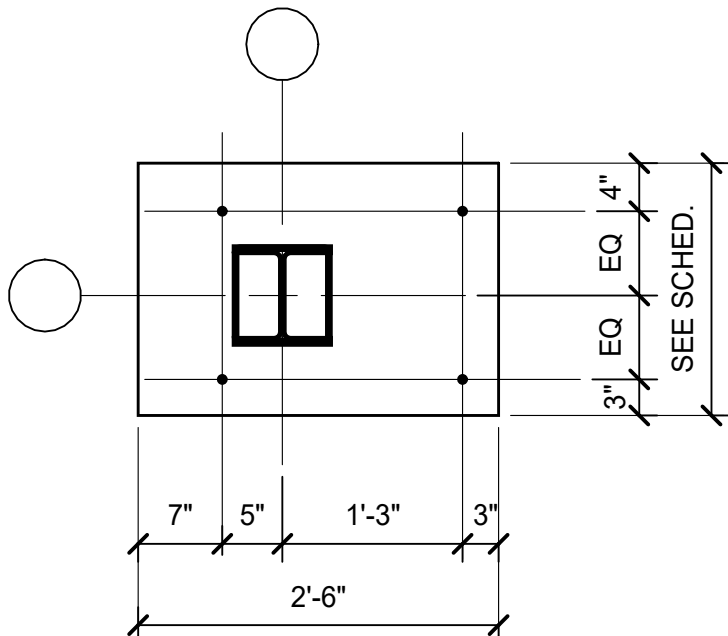


BASE PLATE "C"

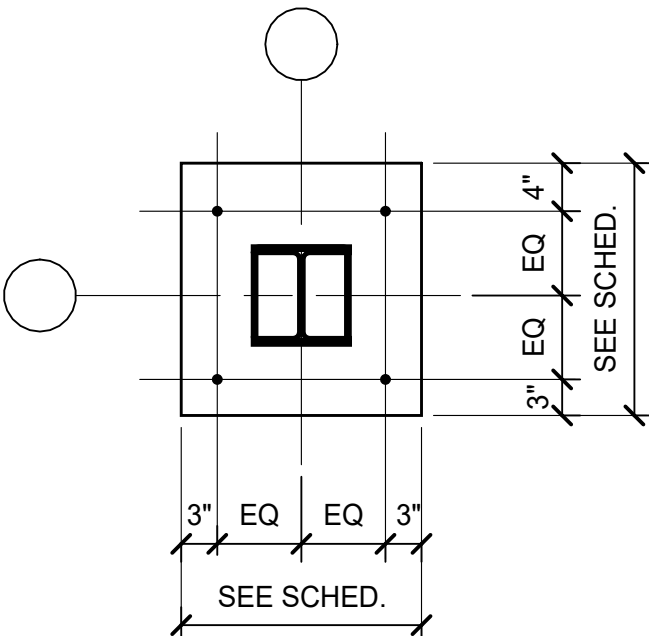


BASE PLATE "B"

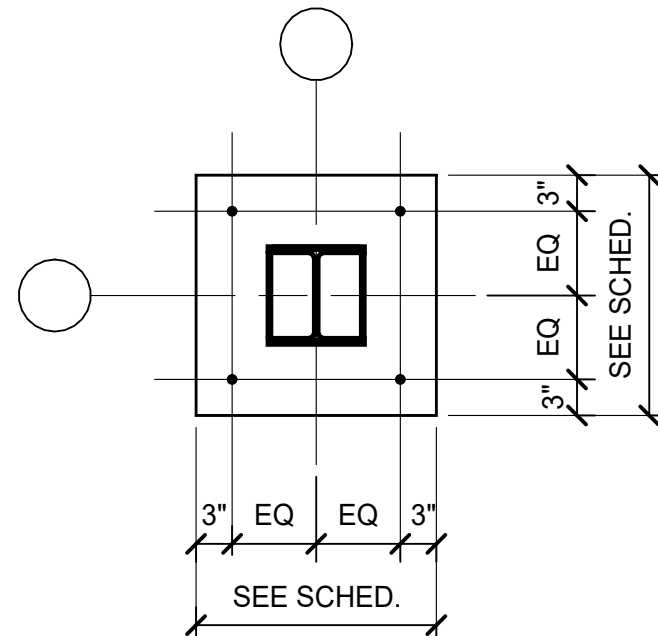


BASE PLATE "A"

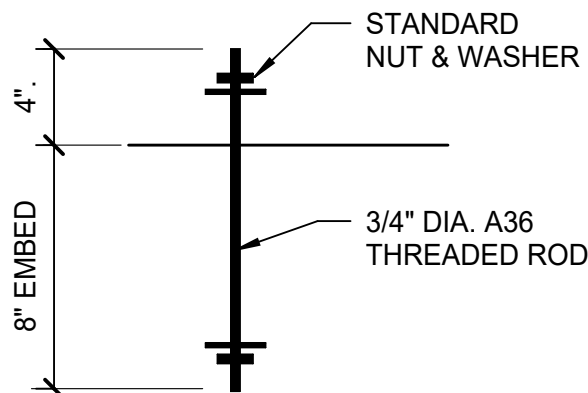

TYPICAL ANCHOR BOLT

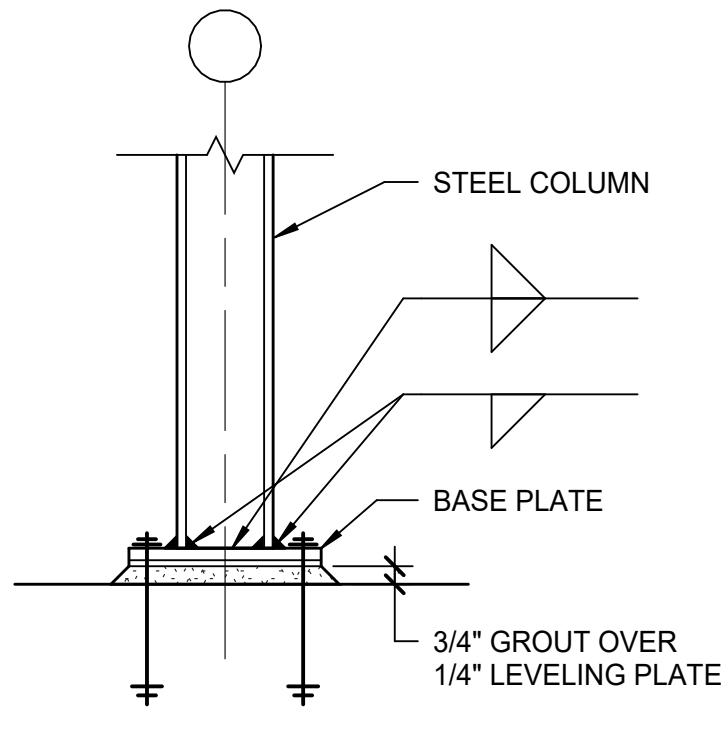

TYPICAL COLUMN BASE

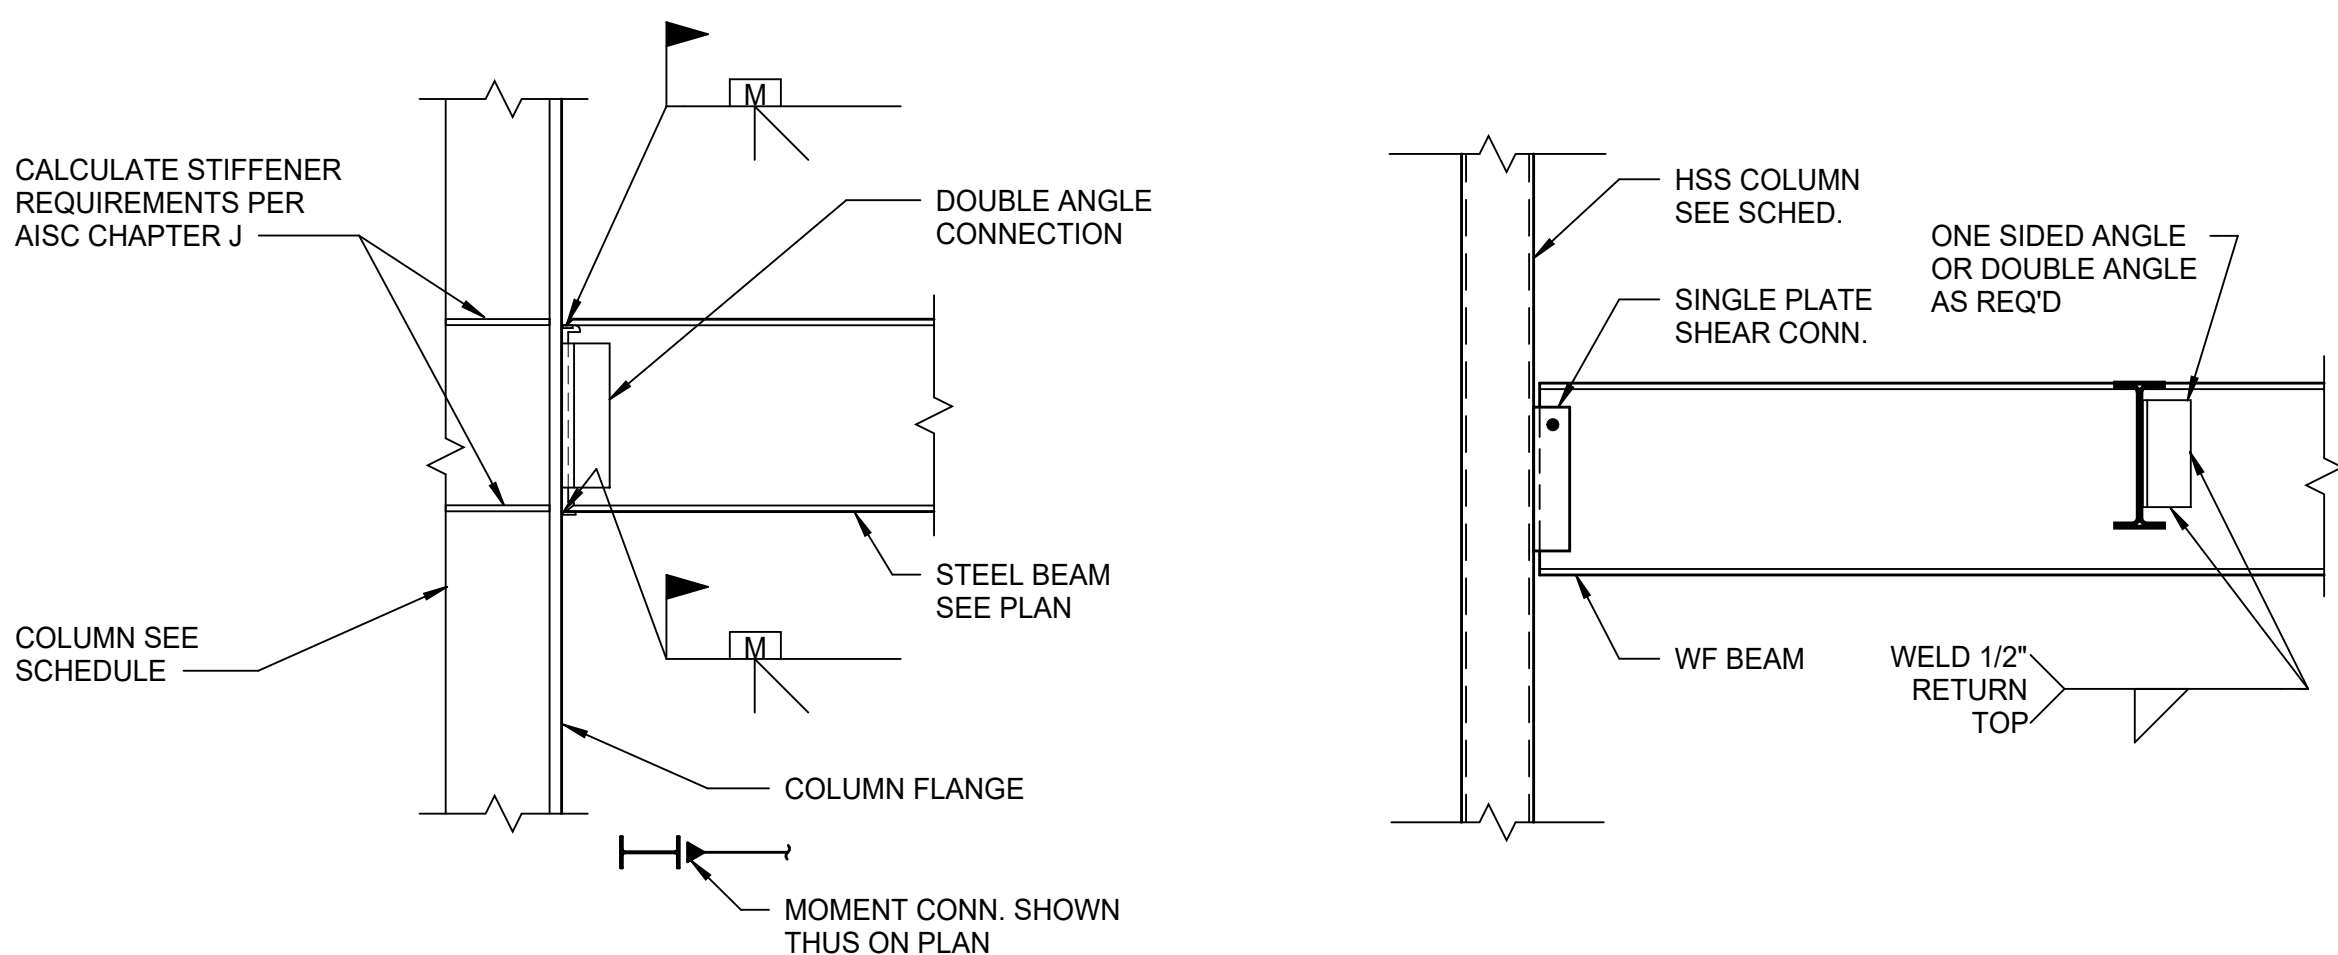


TYPICAL MOMENT CONNECTION

SECTION

SCALE: 3/4" = 1'-0"

6
S0400

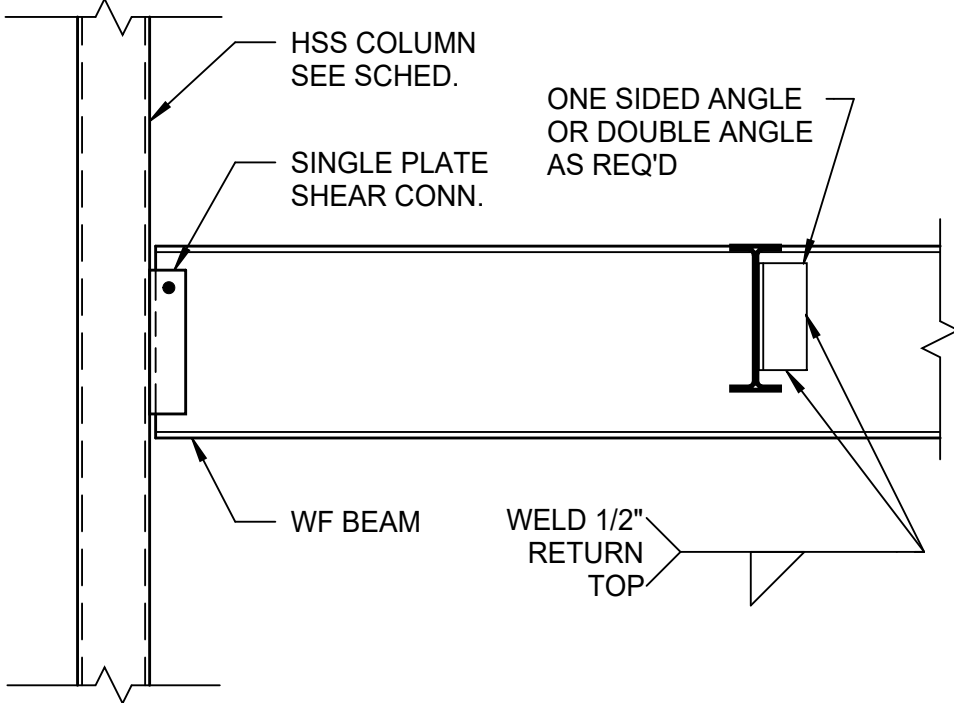


TYPICAL STEEL FRAMING CONNECTION DETAIL AT COLUMNS

SECTION

SCALE: 3/4" = 1'-0"

5
S0400

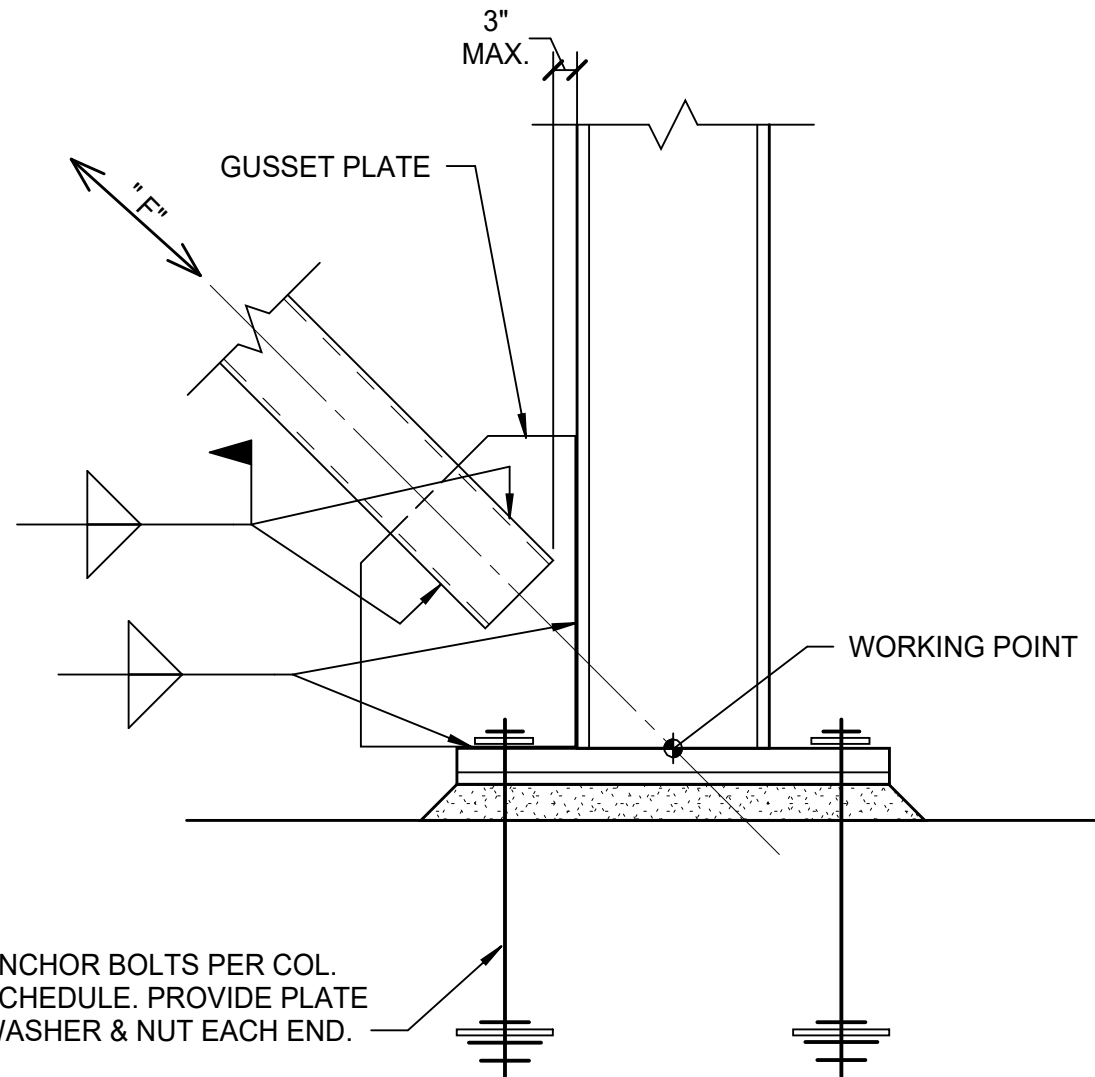


TYPICAL FRAME BASE

SECTION

SCALE: 1 1/2" = 1'-0"

4
S0400

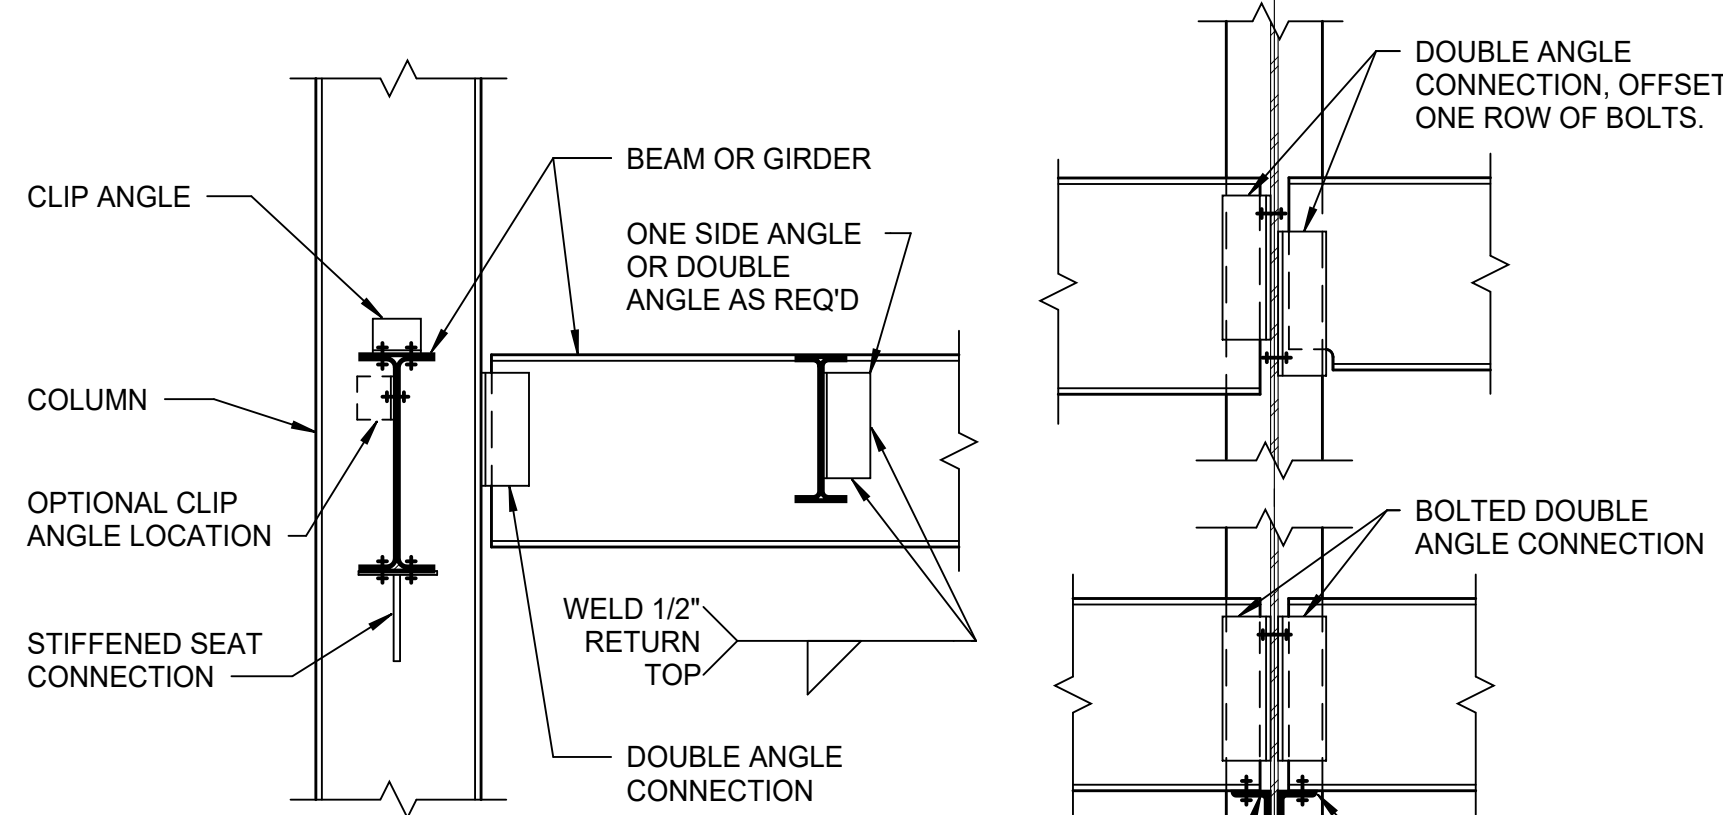


TYPICAL STEEL FRAMING CONNECTION DETAIL AT COLUMNS

SECTION

SCALE: 3/4" = 1'-0"

3
S0400

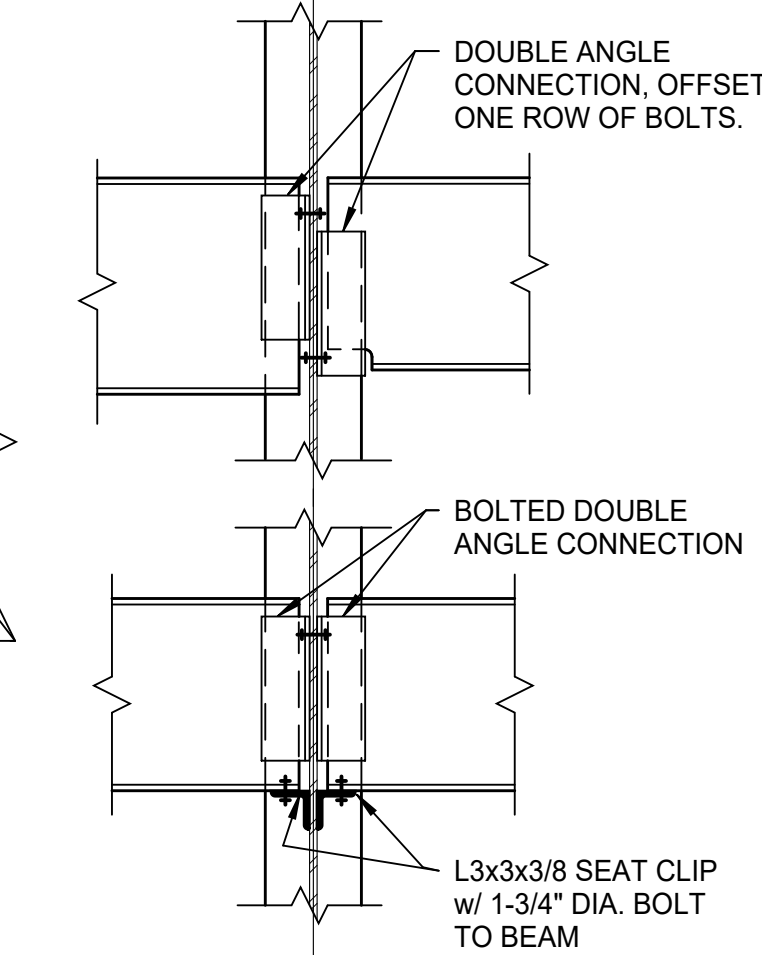

ALTERNATE COLUMN WEB CONNECTIONS



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS
RECREATION CENTER
811 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056

ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE

COLUMN SCHEDULE
AND SECTIONS

S0400



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

**CONGRESS HEIGHTS
RECREATION CENTER**
611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056


ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS


NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
B	IFC REVISION	2/18/26

**TYPICAL STEEL
SECTIONS**

S0401

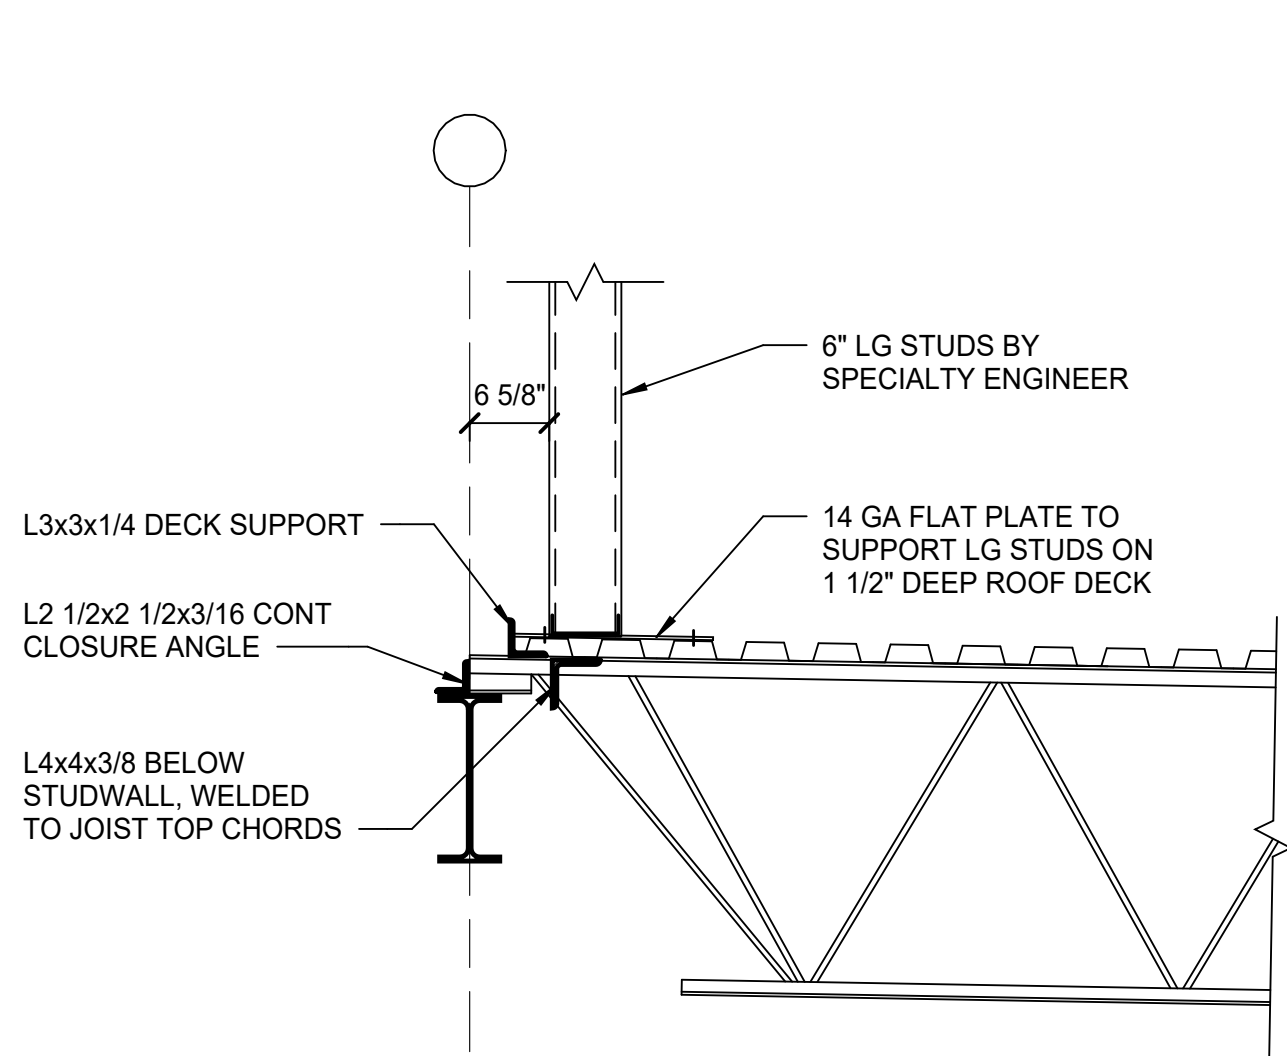


SECTION 4
SCALE: 3/4" = 1'-0"

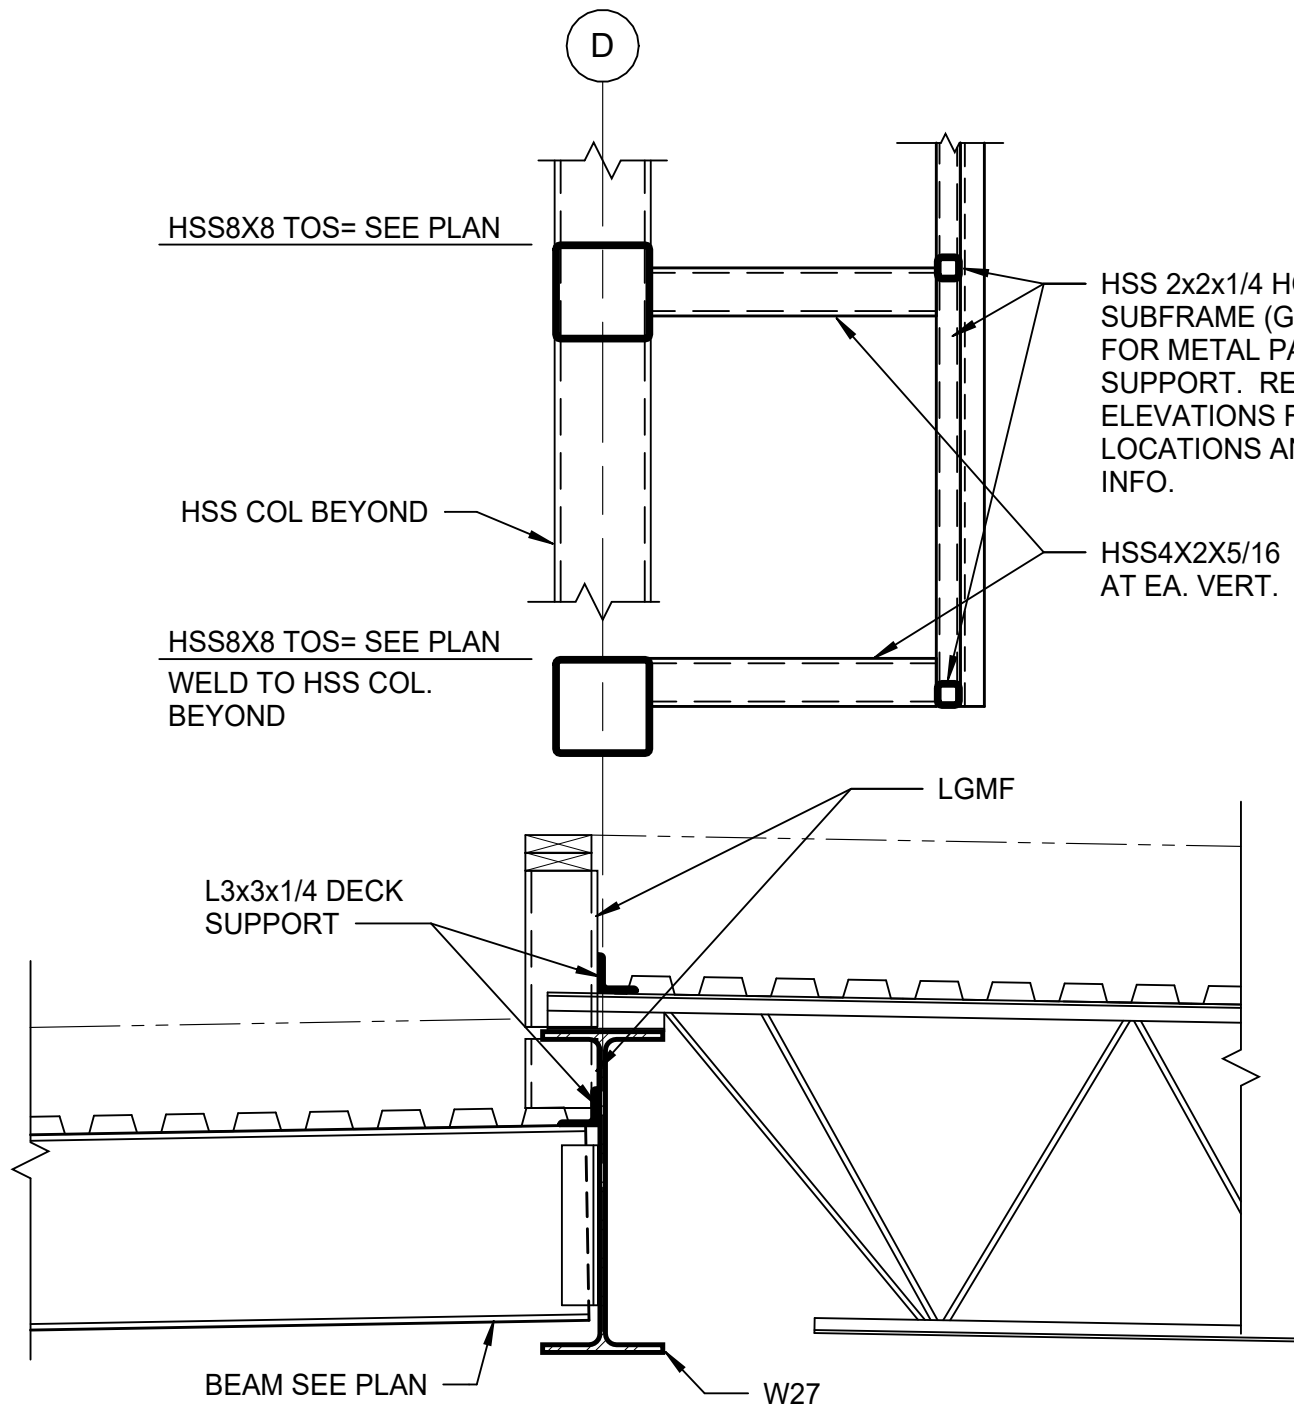


GALV AND PAINT ALL EXPOSED STEEL


SECTION 3
SCALE: 3/4" = 1'-0"

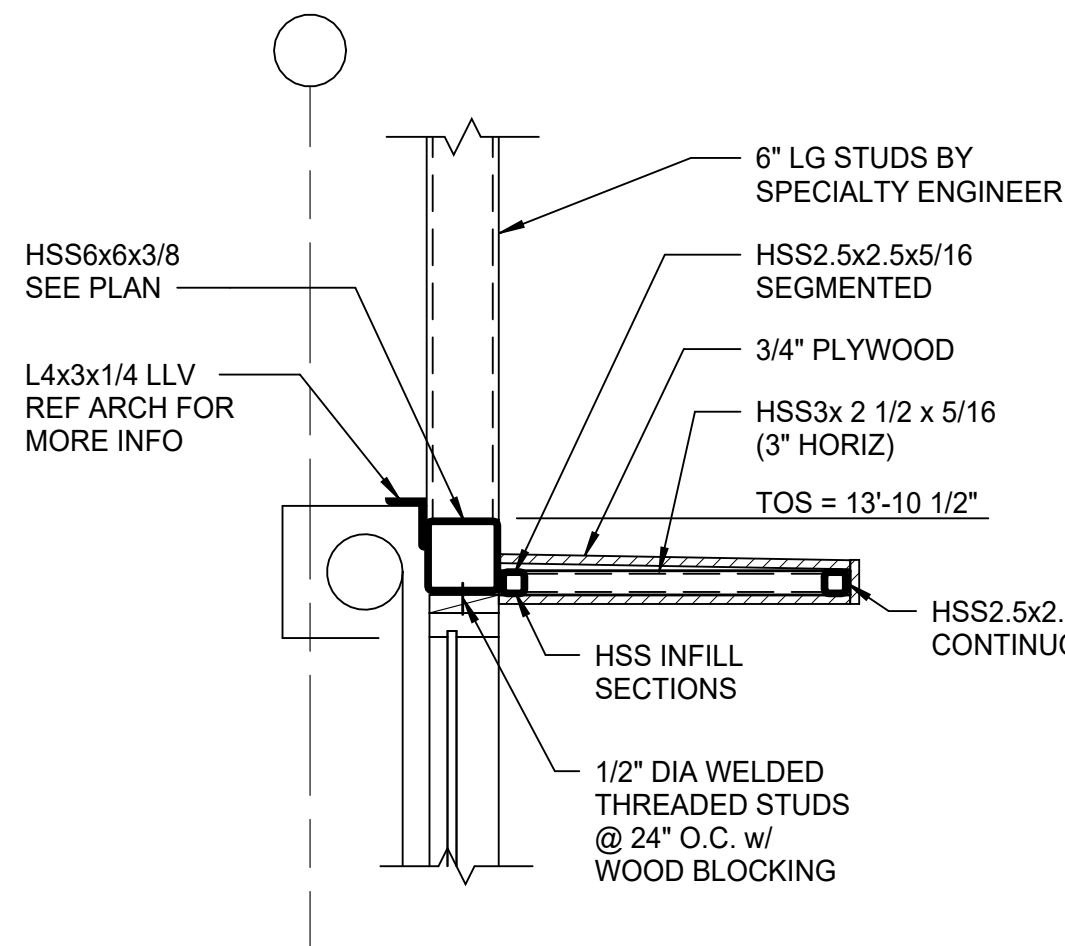


SECTION 2
SCALE: 3/4" = 1'-0"

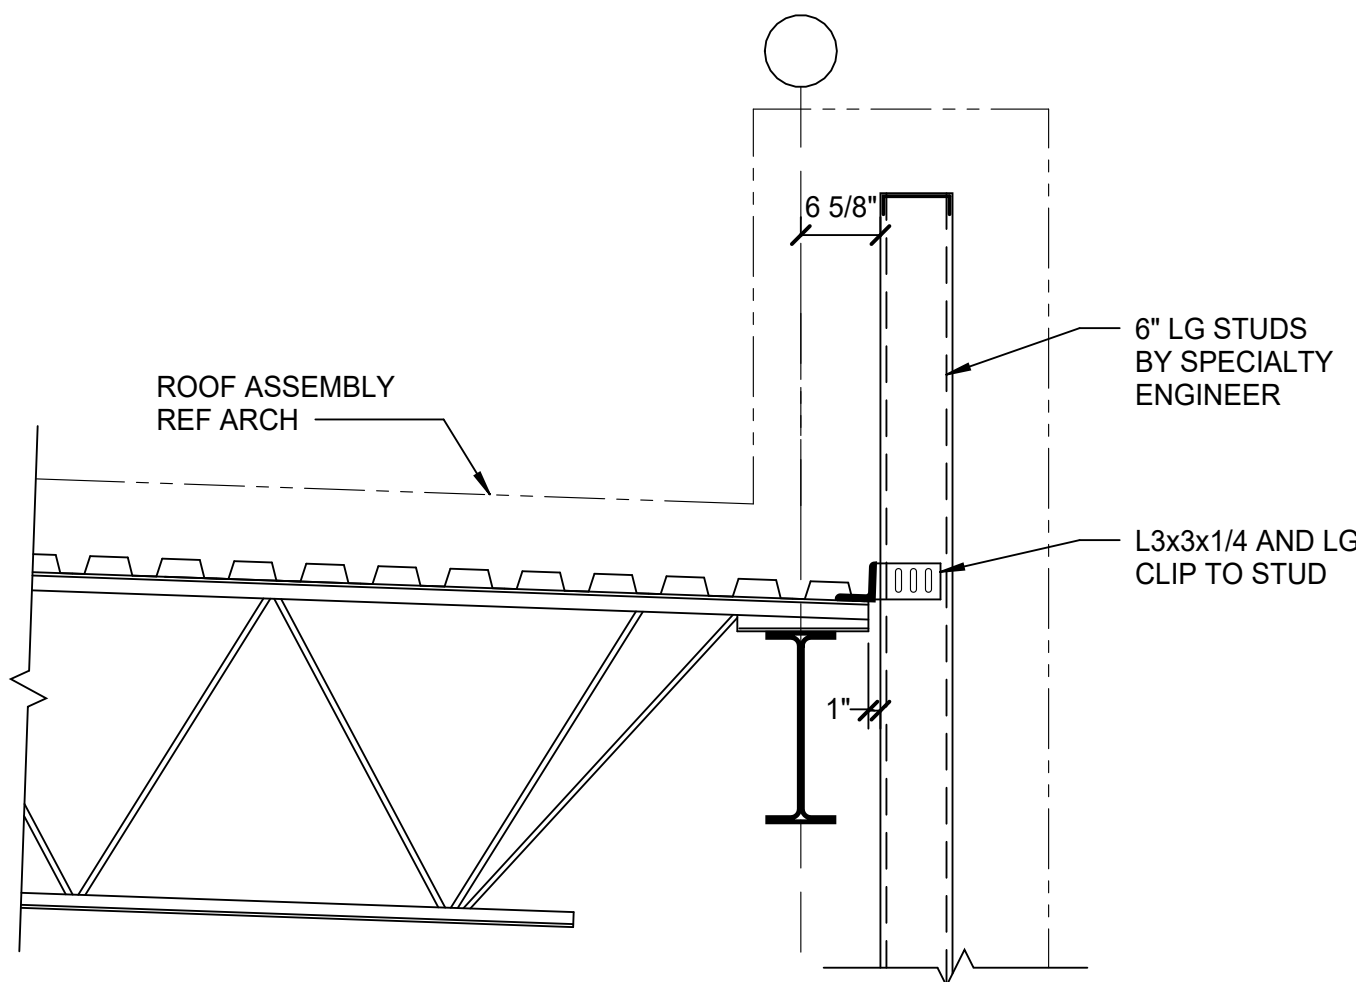

SECTION 1
SCALE: 3/4" = 1'-0"

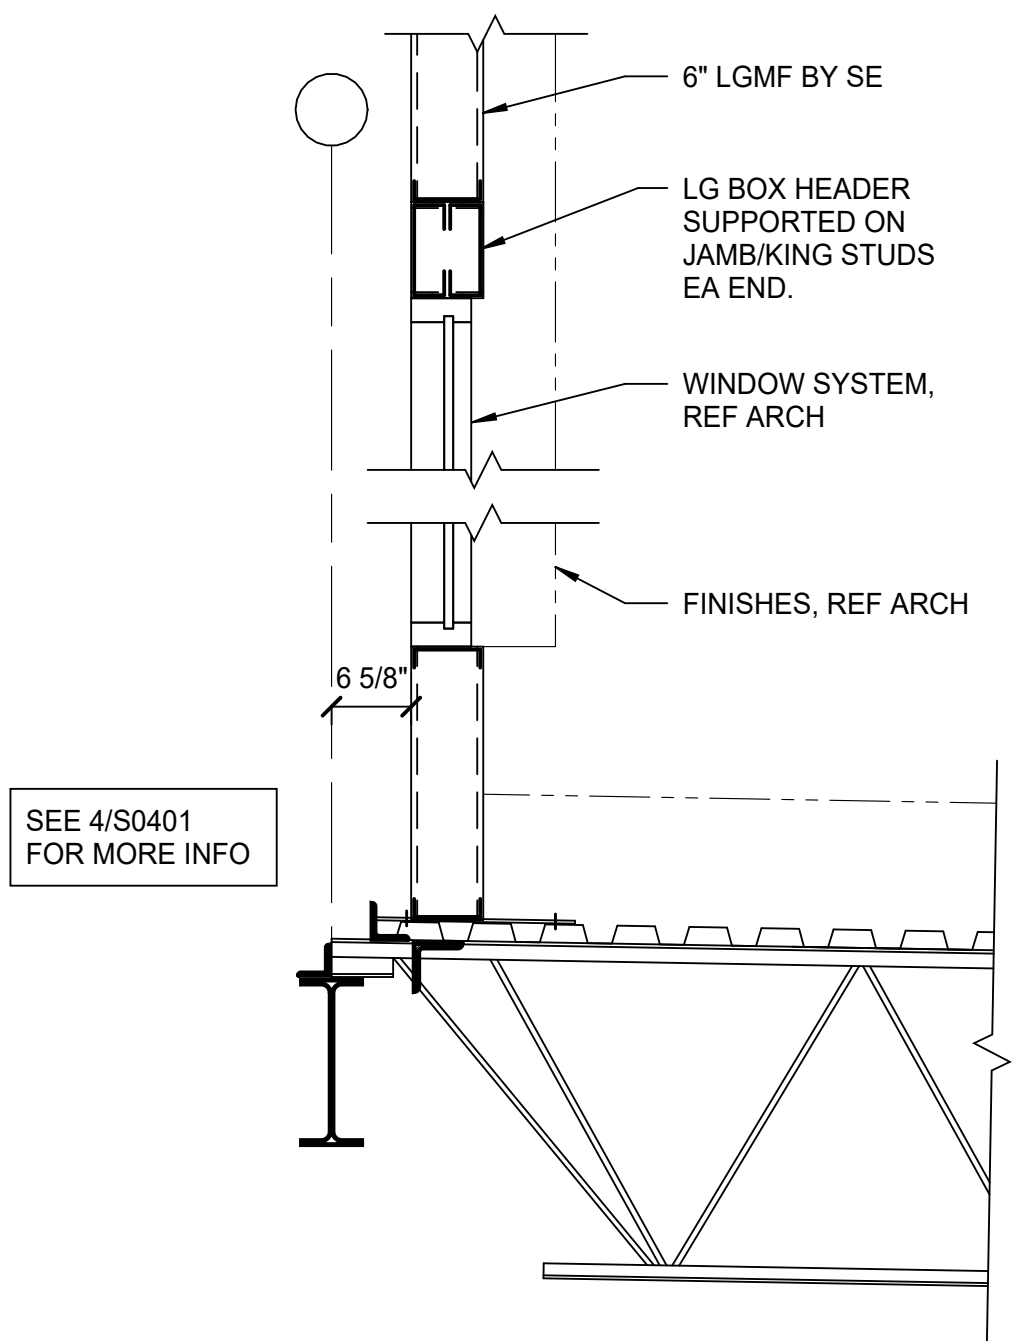


SECTION 8
SCALE: 3/4" = 1'-0"

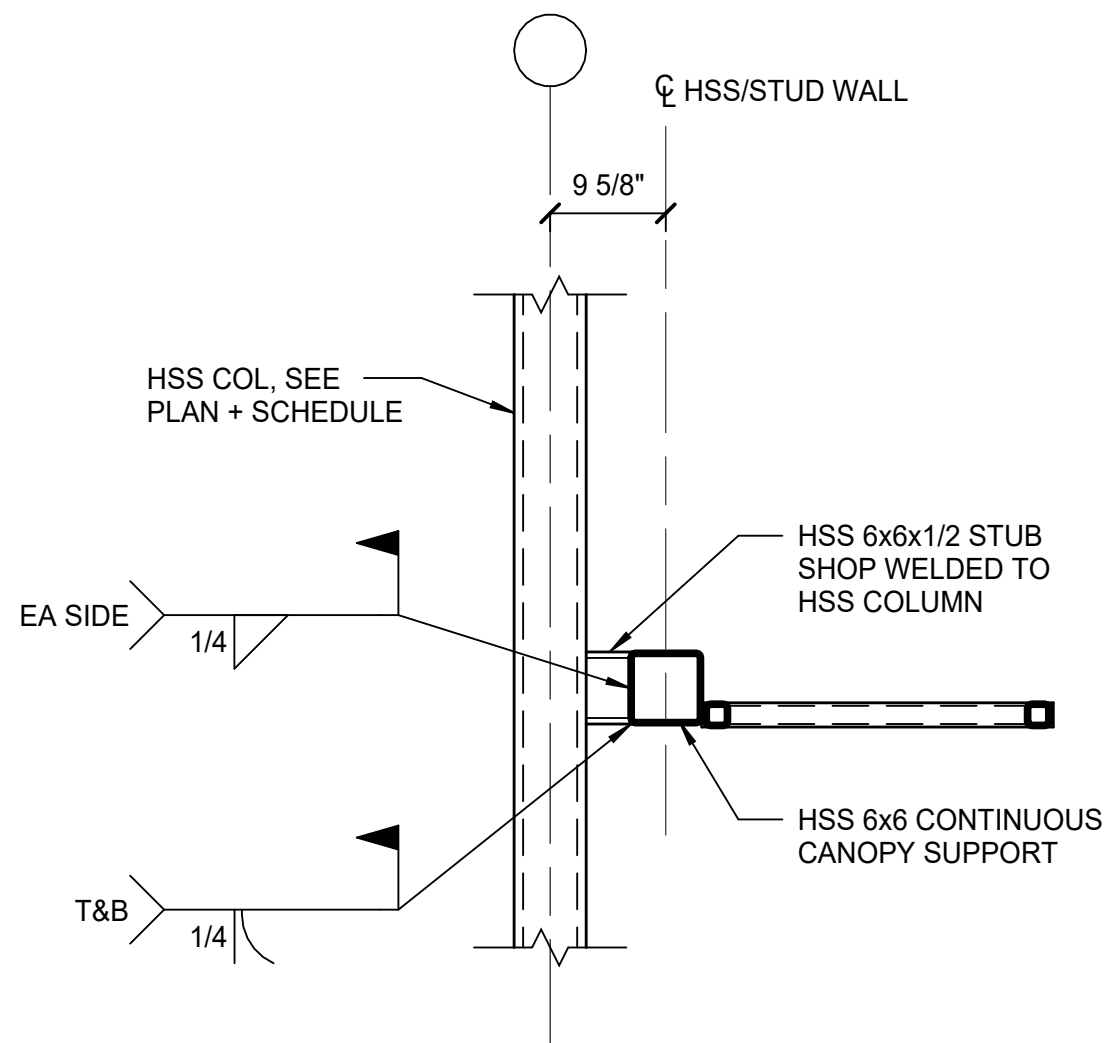


LOW CONNECTION FROM CANOPY GIRT TO COLUMN


SECTION 7
SCALE: 3/4" = 1'-0"

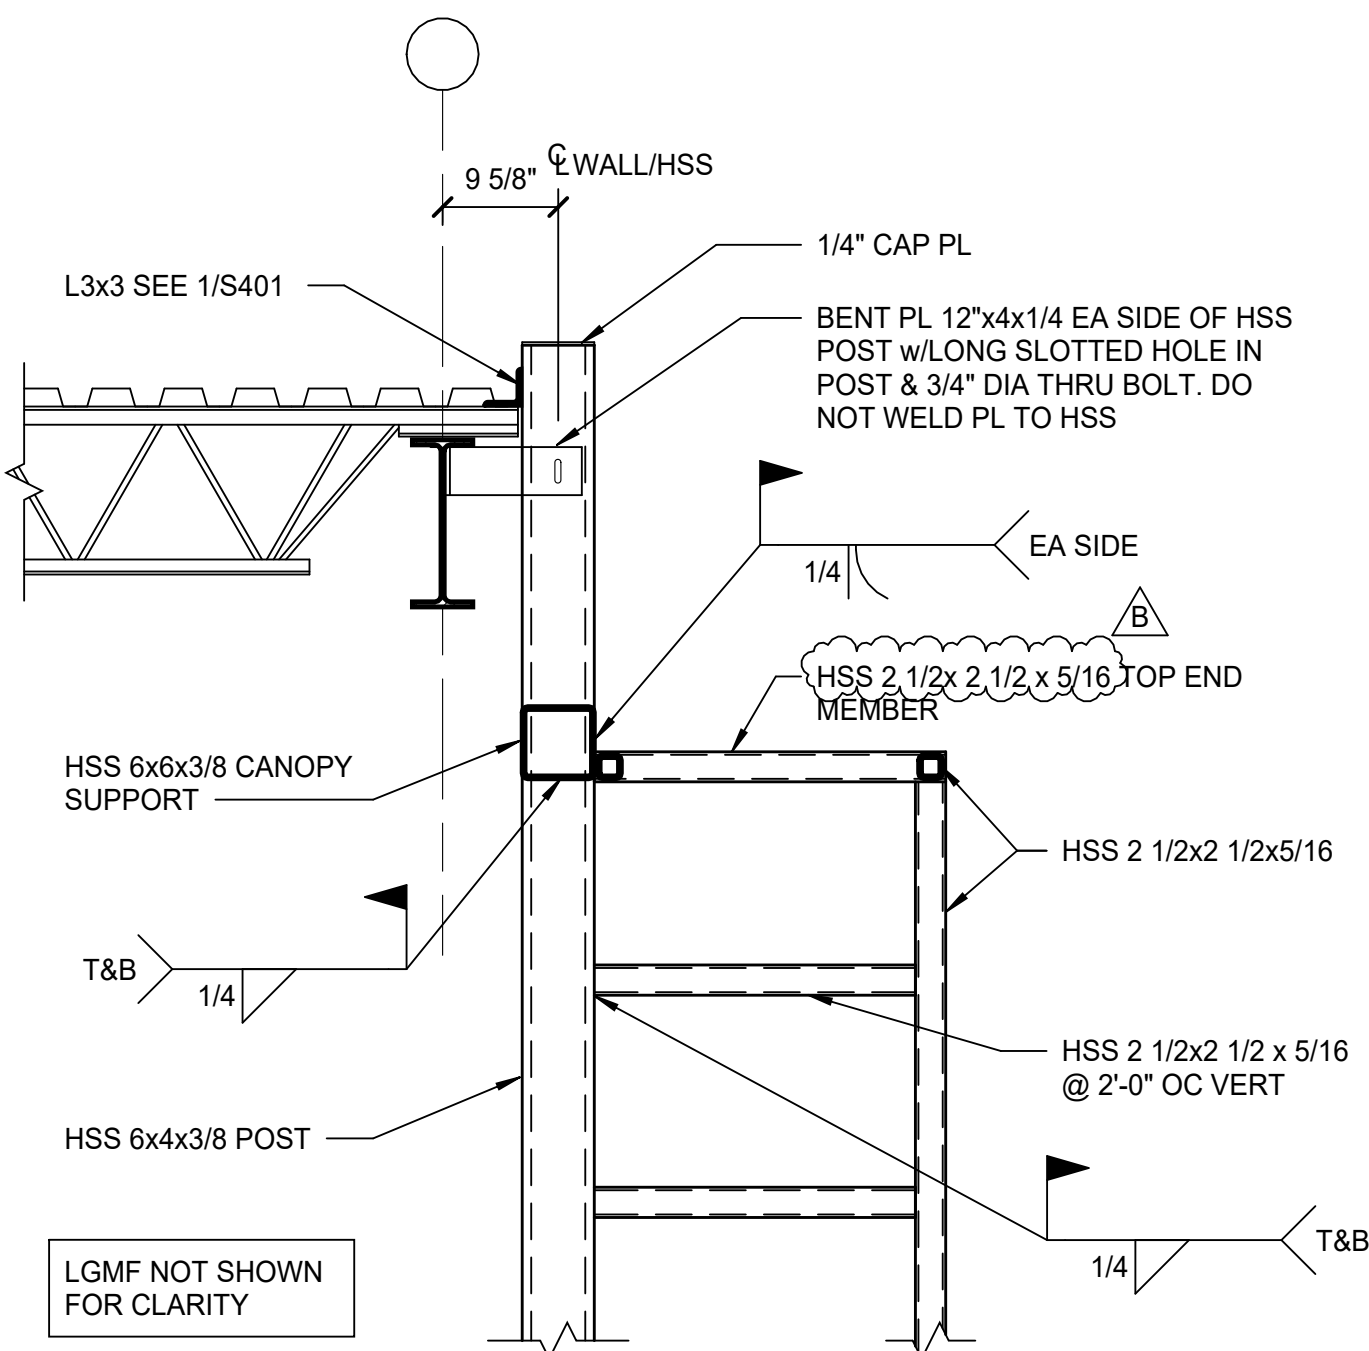


SECTION 6
SCALE: 3/4" = 1'-0"

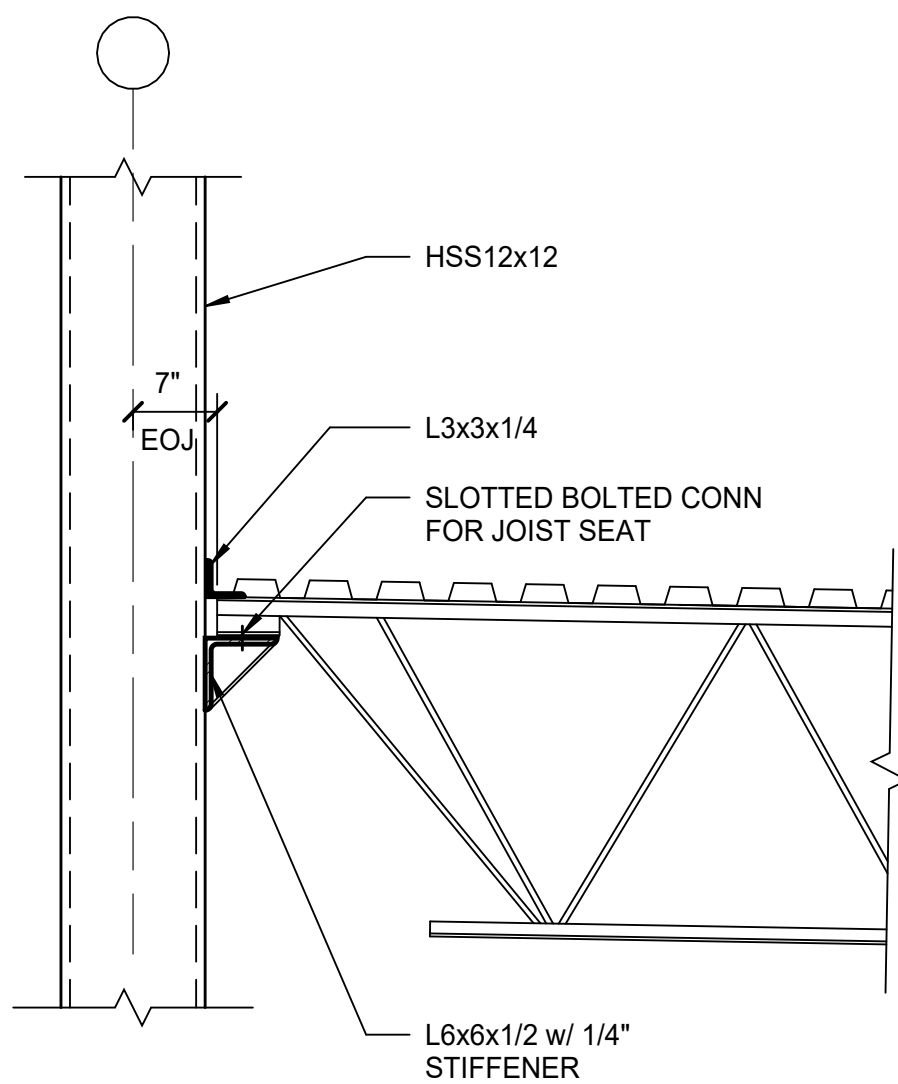


SECTION 5
SCALE: 3/4" = 1'-0"

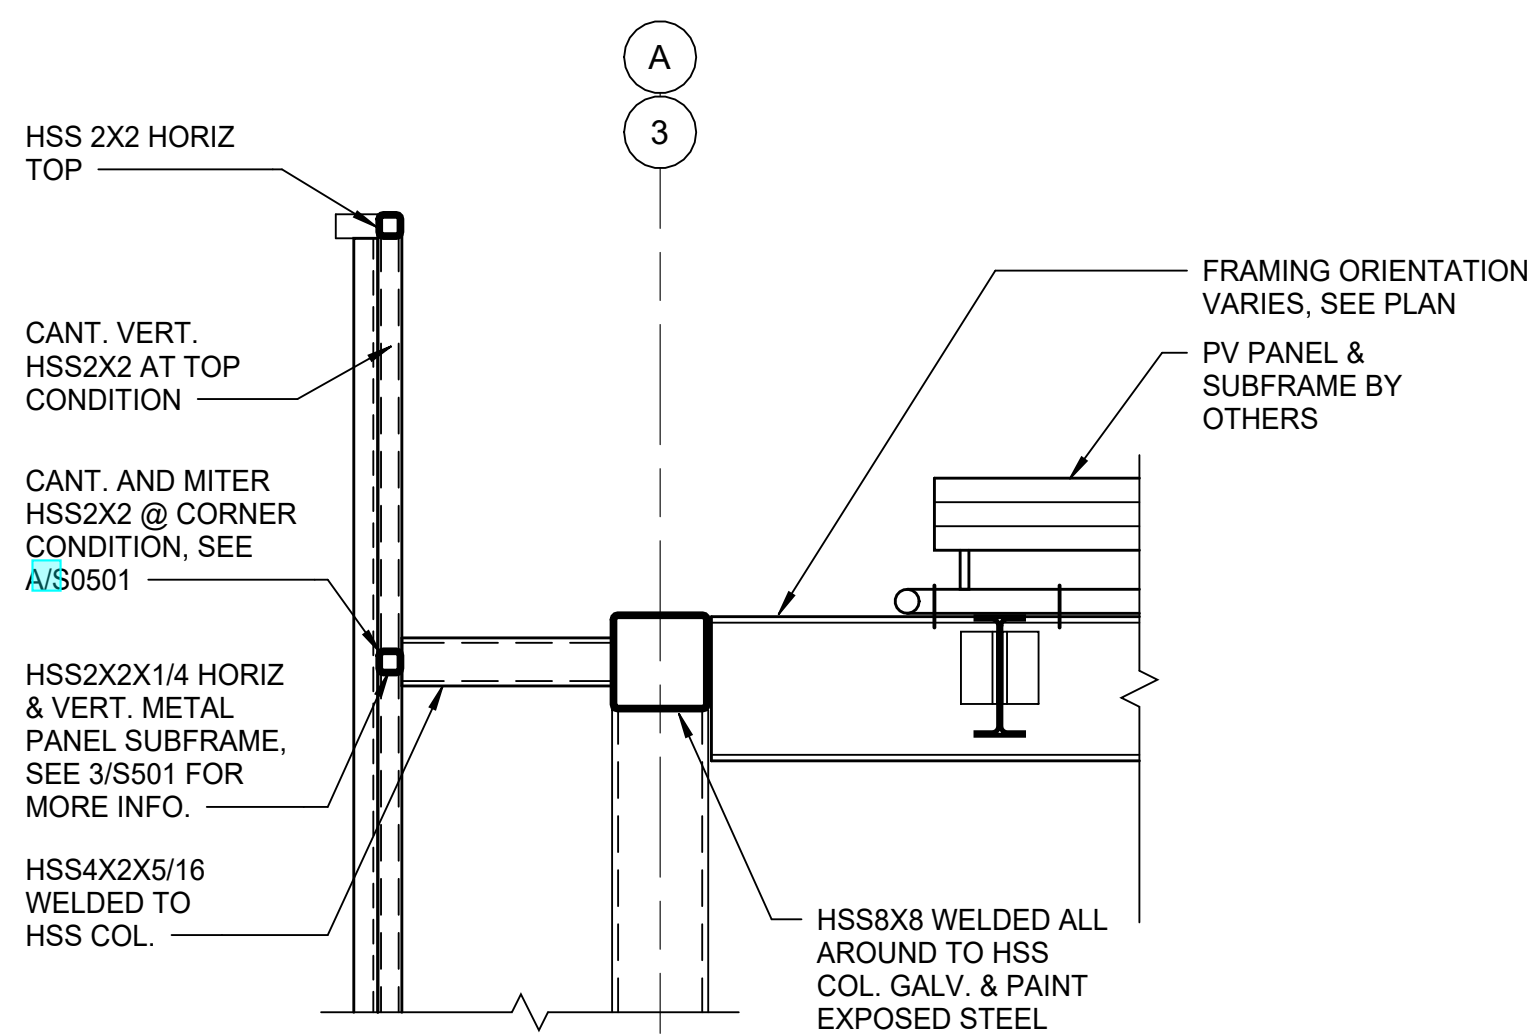


SECTION 12
SCALE: 3/4" = 1'-0"

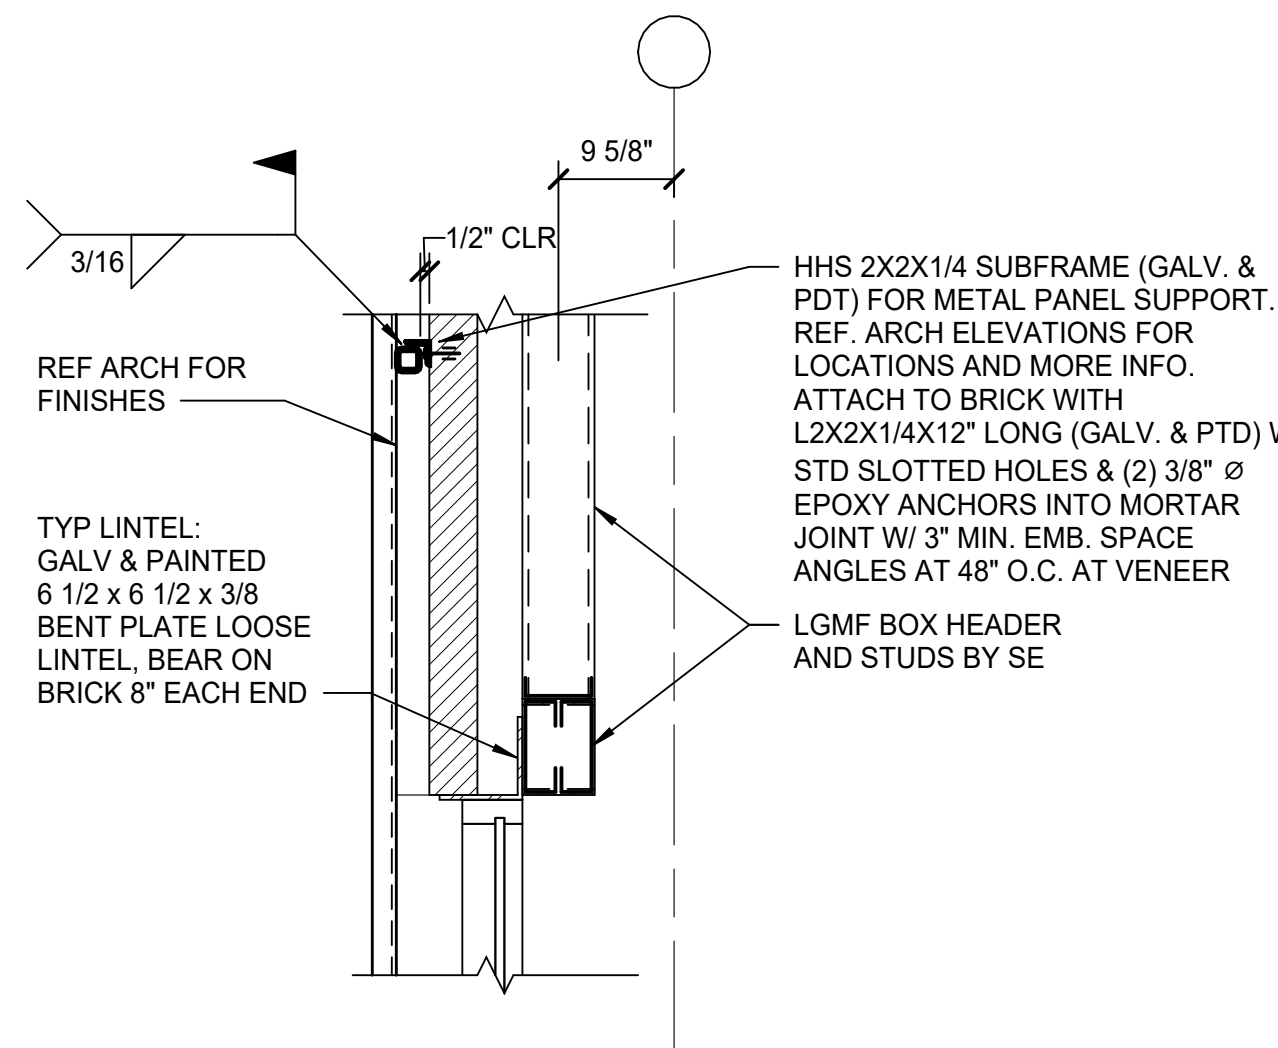


SECTION 11
SCALE: 3/4" = 1'-0"

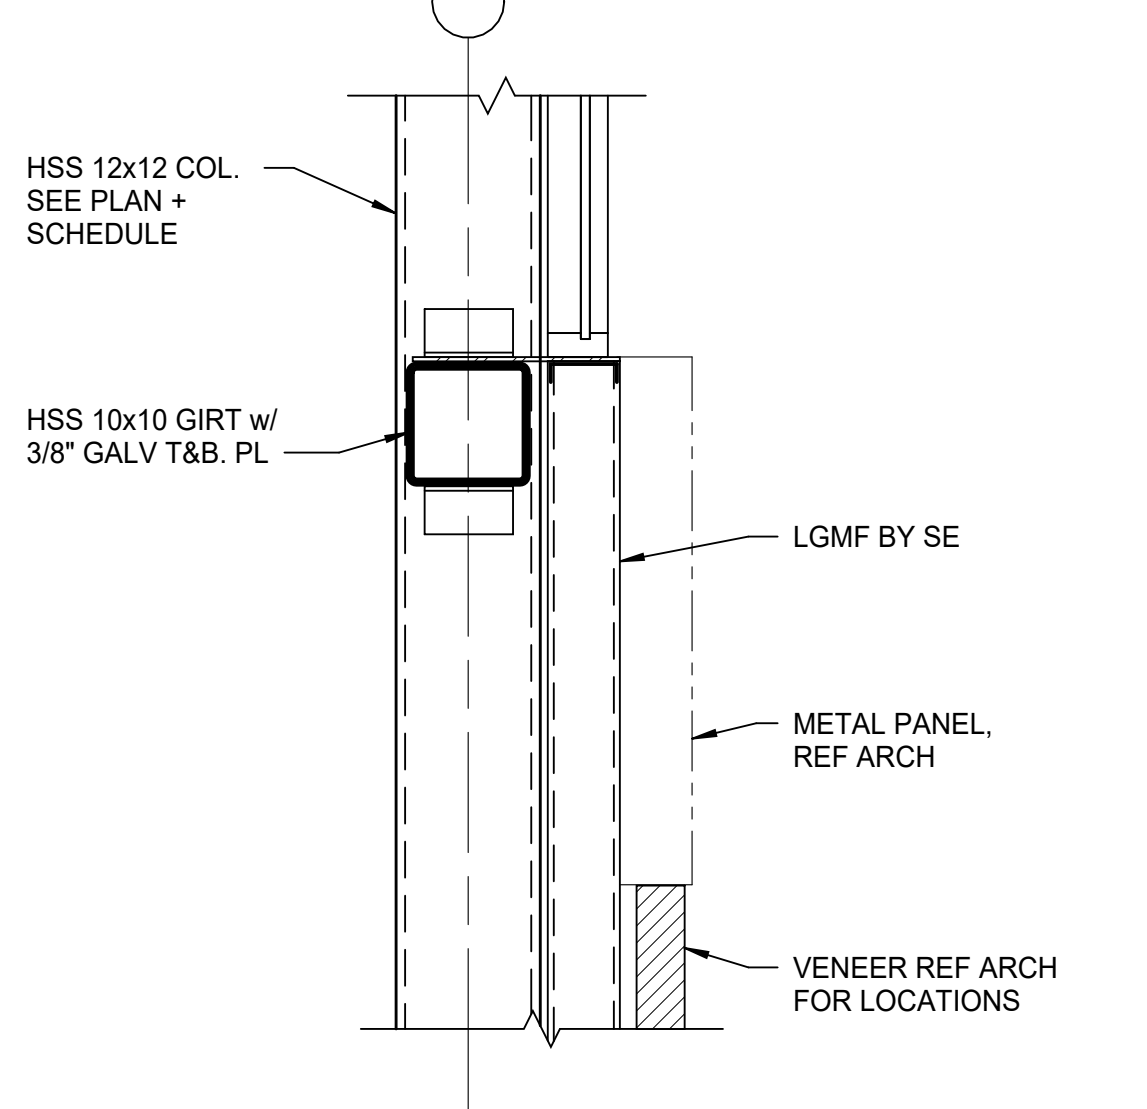


SECTION 10
SCALE: 3/4" = 1'-0"

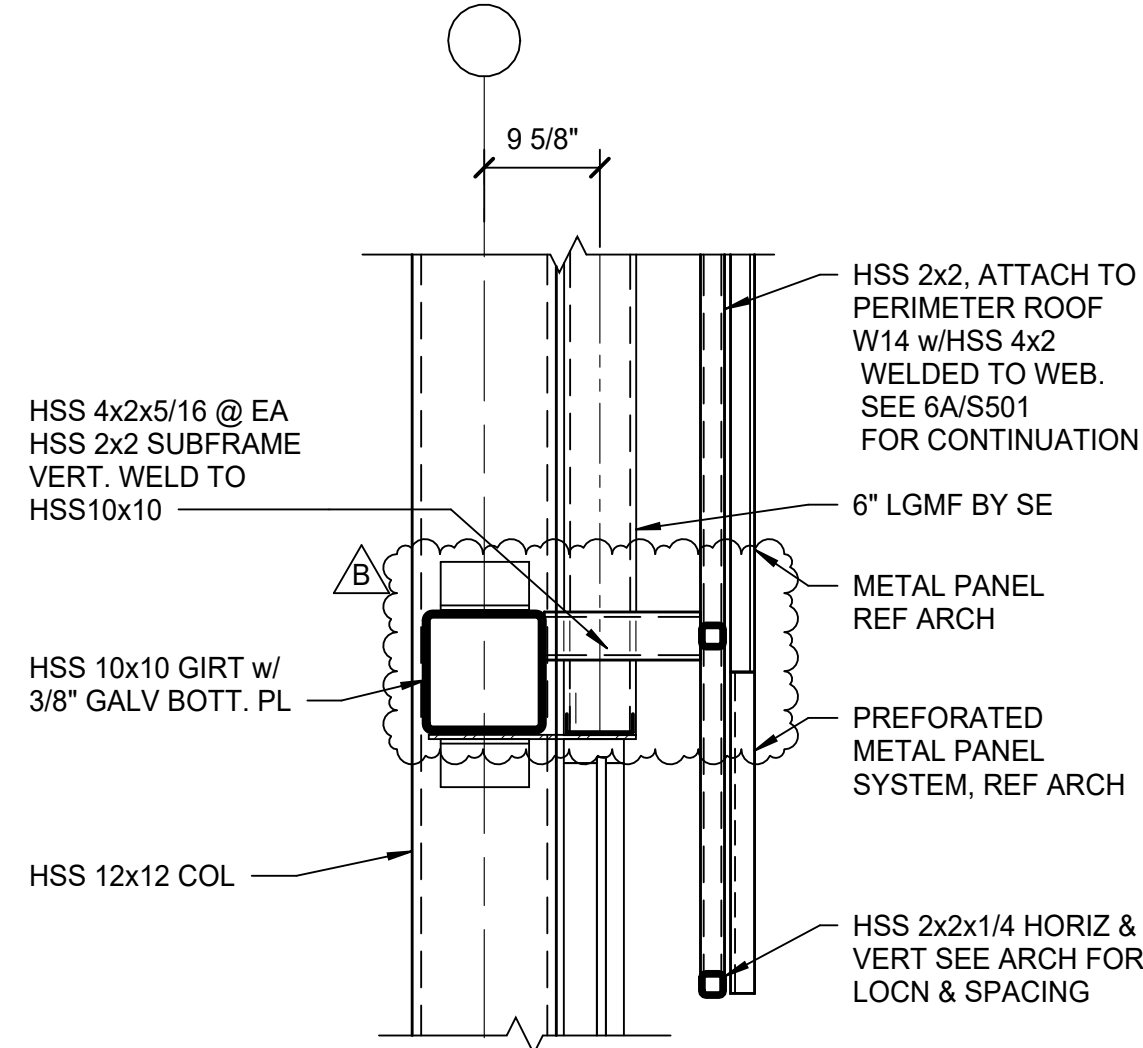


SECTION 9
SCALE: 3/4" = 1'-0"

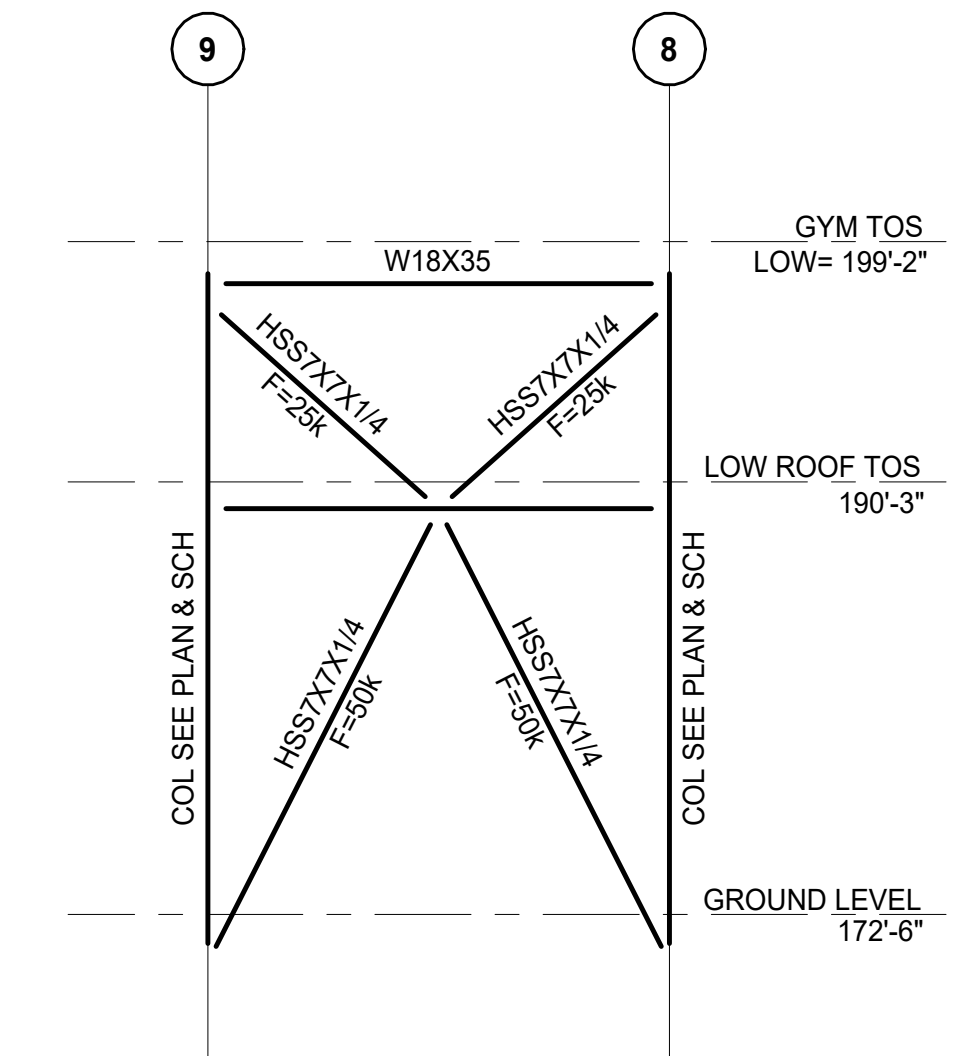


BF-5
SCALE: 1/8" = 1'-0"

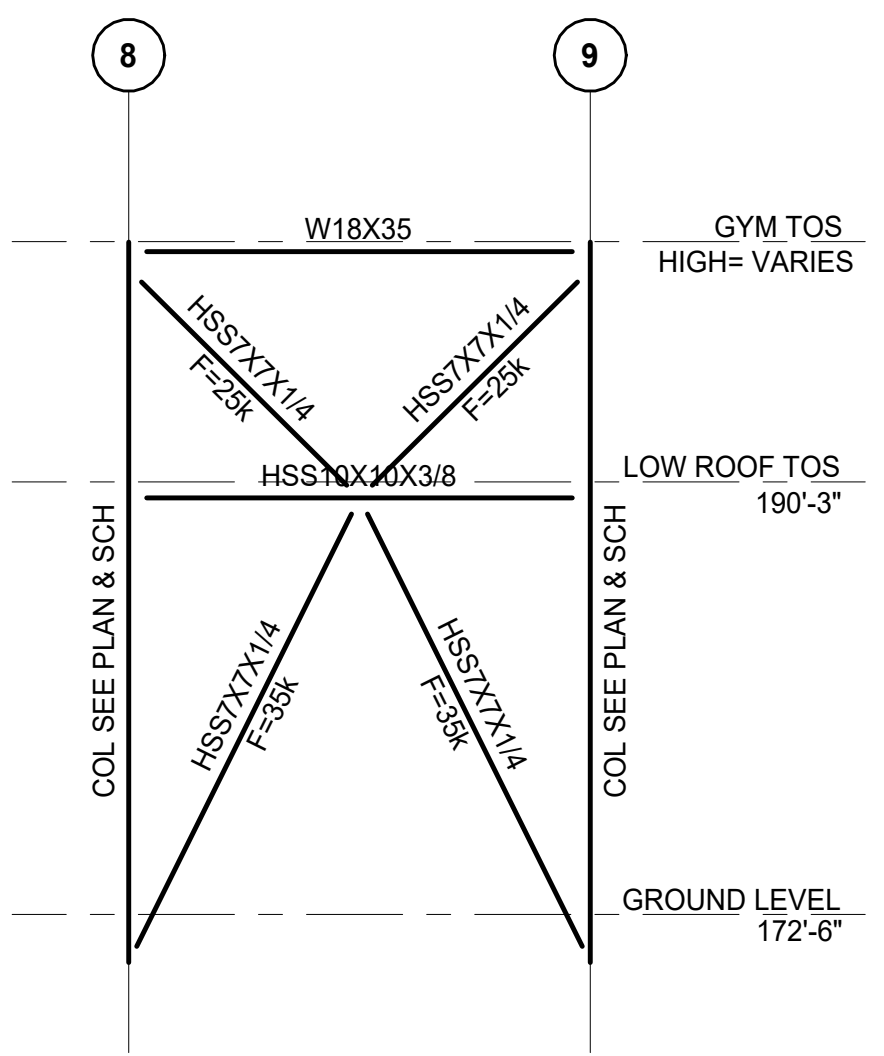


BF-4
SCALE: 1/8" = 1'-0"

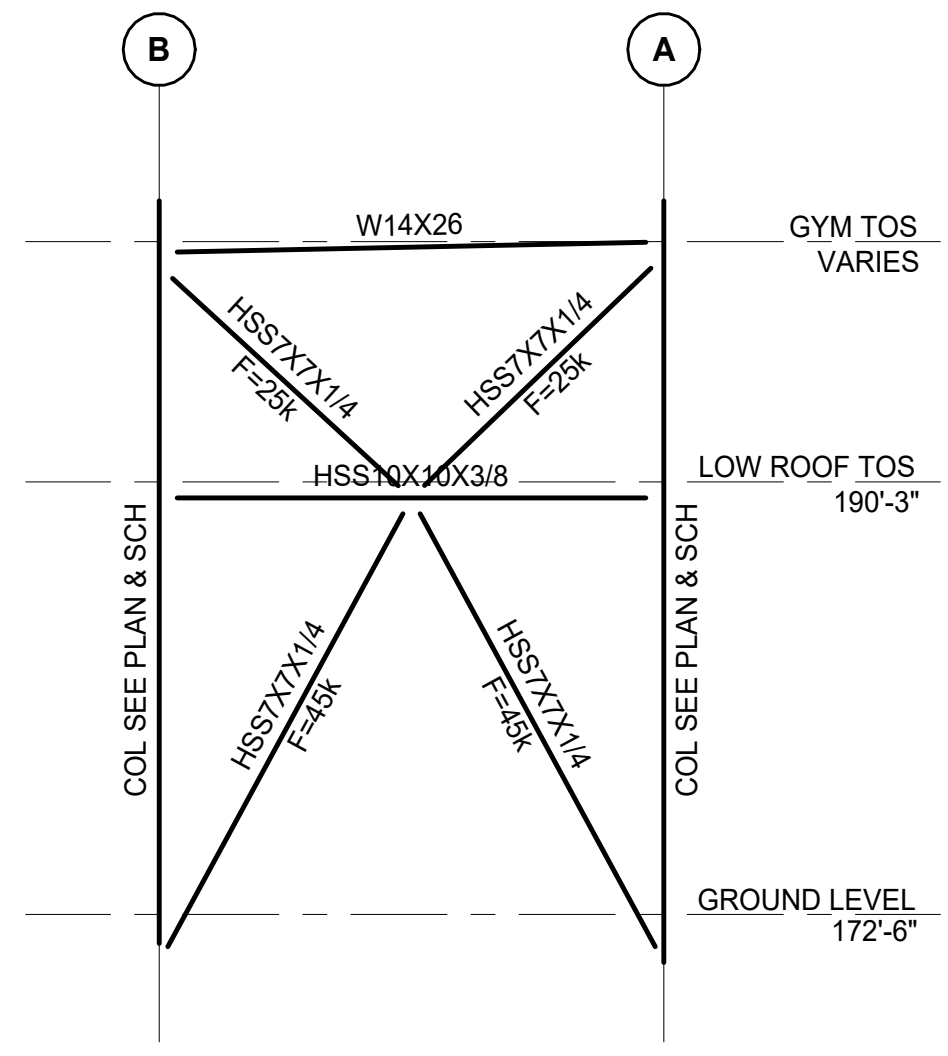


BF-3
SCALE: 1/8" = 1'-0"

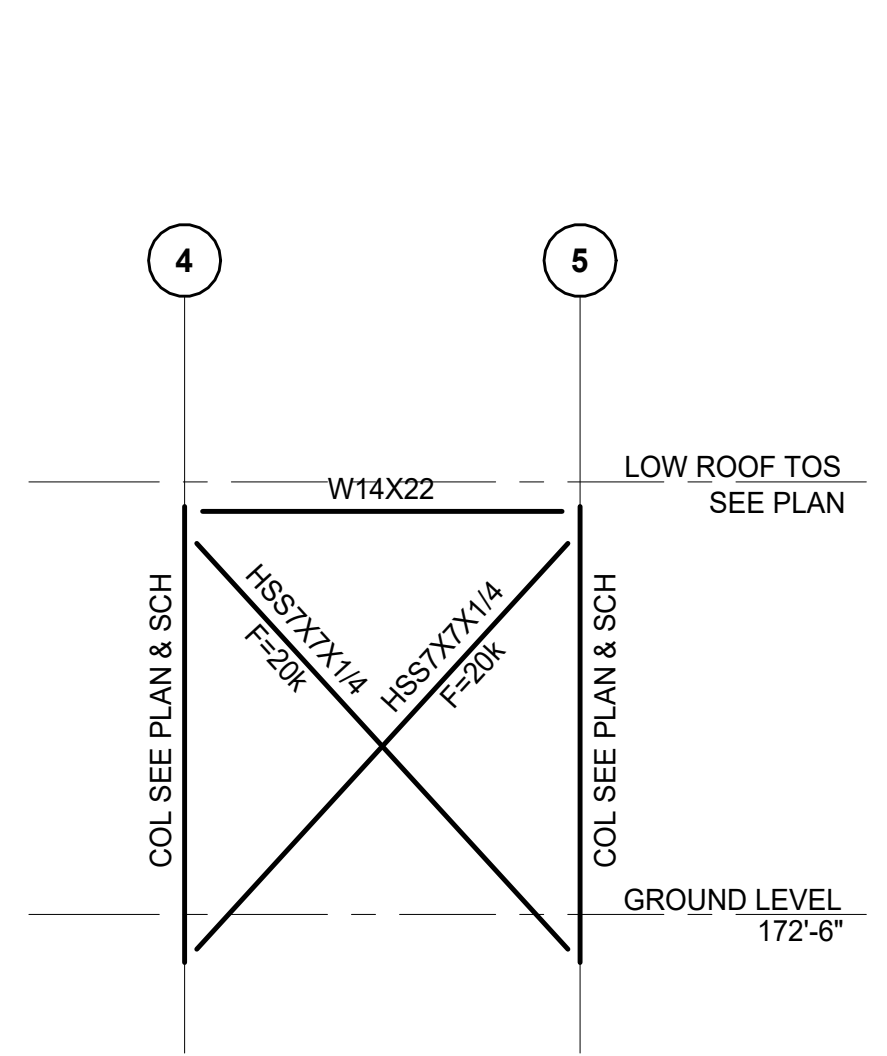

BF-2
SCALE: 1/8" = 1'-0"

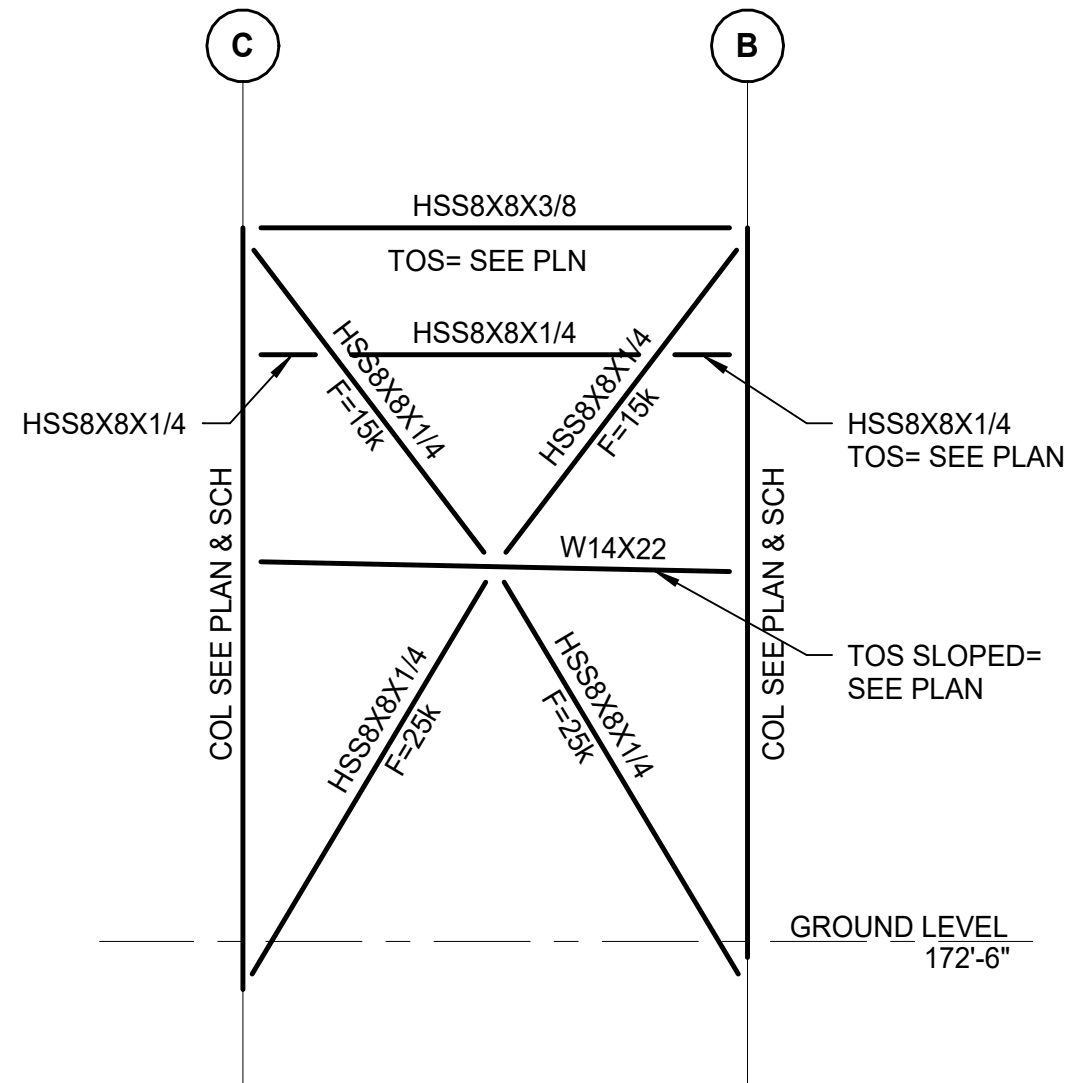

BF-1
SCALE: 1/8" = 1'-0"

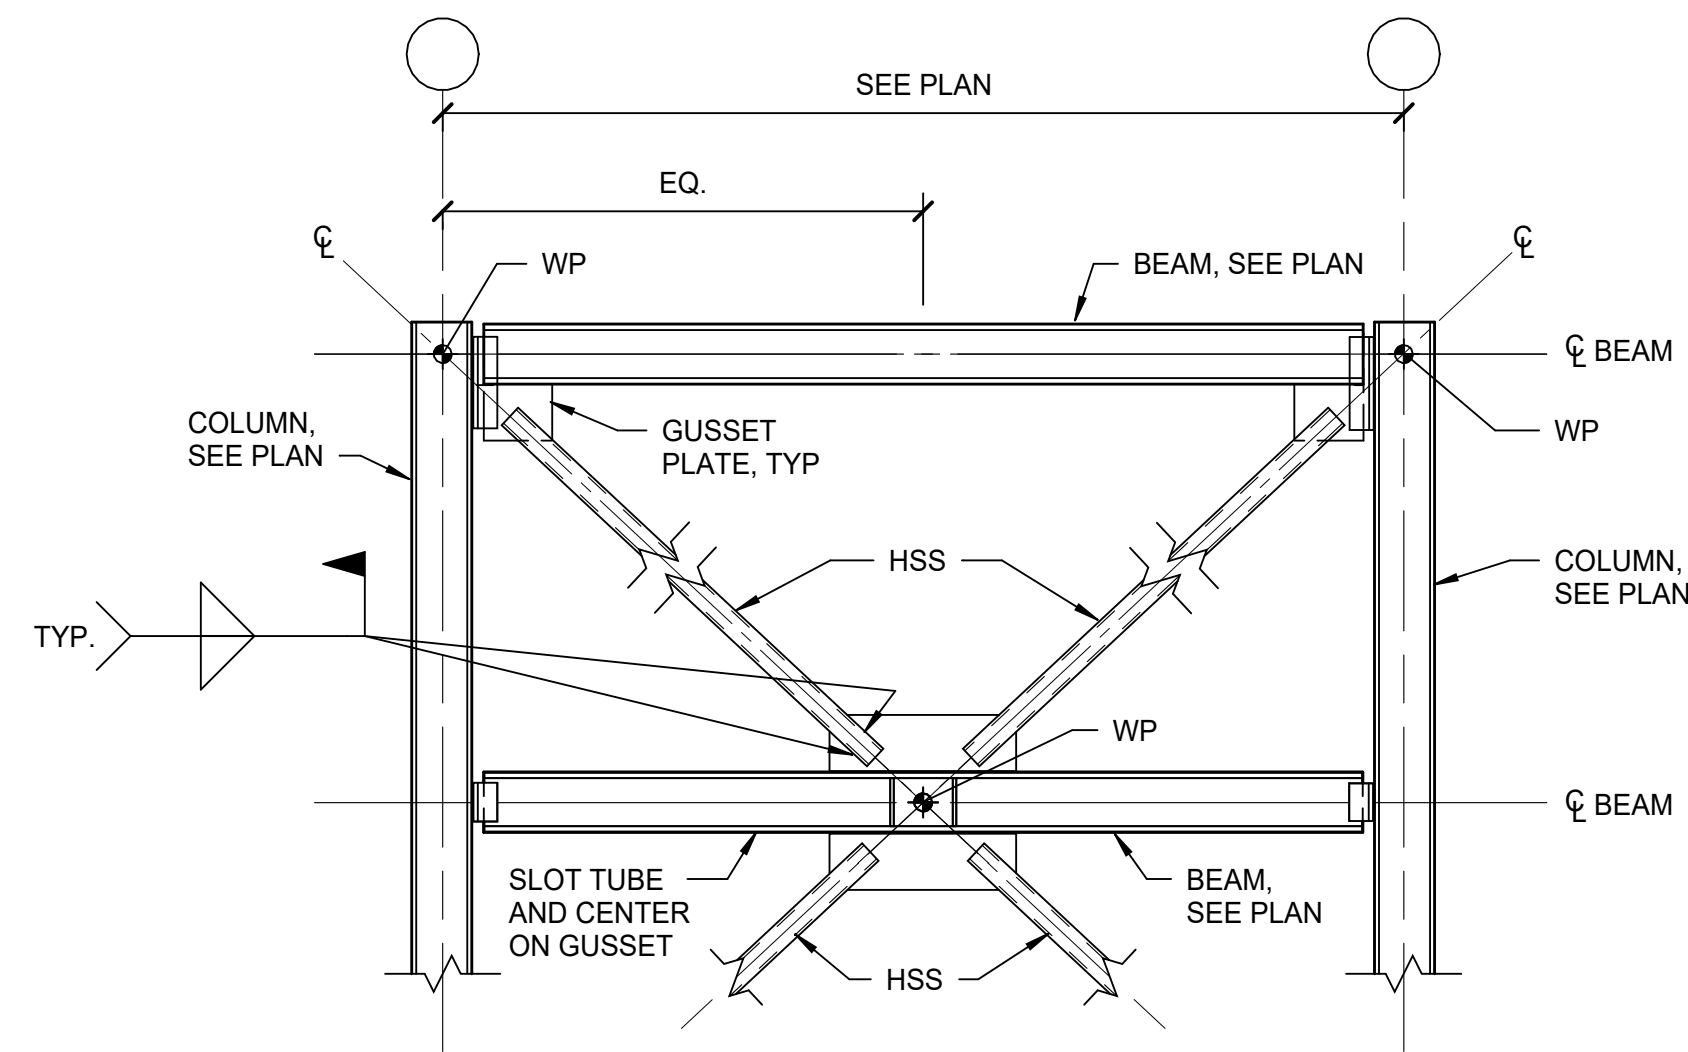


TYPICAL BRACING


- ALL BOLTED CONNECTIONS TO BE SLIP CRITICAL

SECTION
SCALE: 3/4" = 1'-0"


- F=AXIAL FORCE IN BRACE
V=VERTICAL REACTION (GRAVITY & LATERAL)
- NOTES:
1. BEAM-TO-COLUMN CONNECTIONS SHALL BE DESIGNED TO SUPPORT BEAM VERTICAL REACTION SHOWN. COMPONENT OF BRACE FORCE HAS ALREADY BEEN INCLUDED IN REACTIONS.
 2. DIAGONAL TUBE CONNECTIONS SHALL BE DESIGNED TO SUPPORT AXIAL FORCE SHOWN.
 3. LOADS INDICATED ARE MAXIMUM FACTORED LOAD REACTIONS PER IBC LOAD COMBINATIONS 1605.2.1.

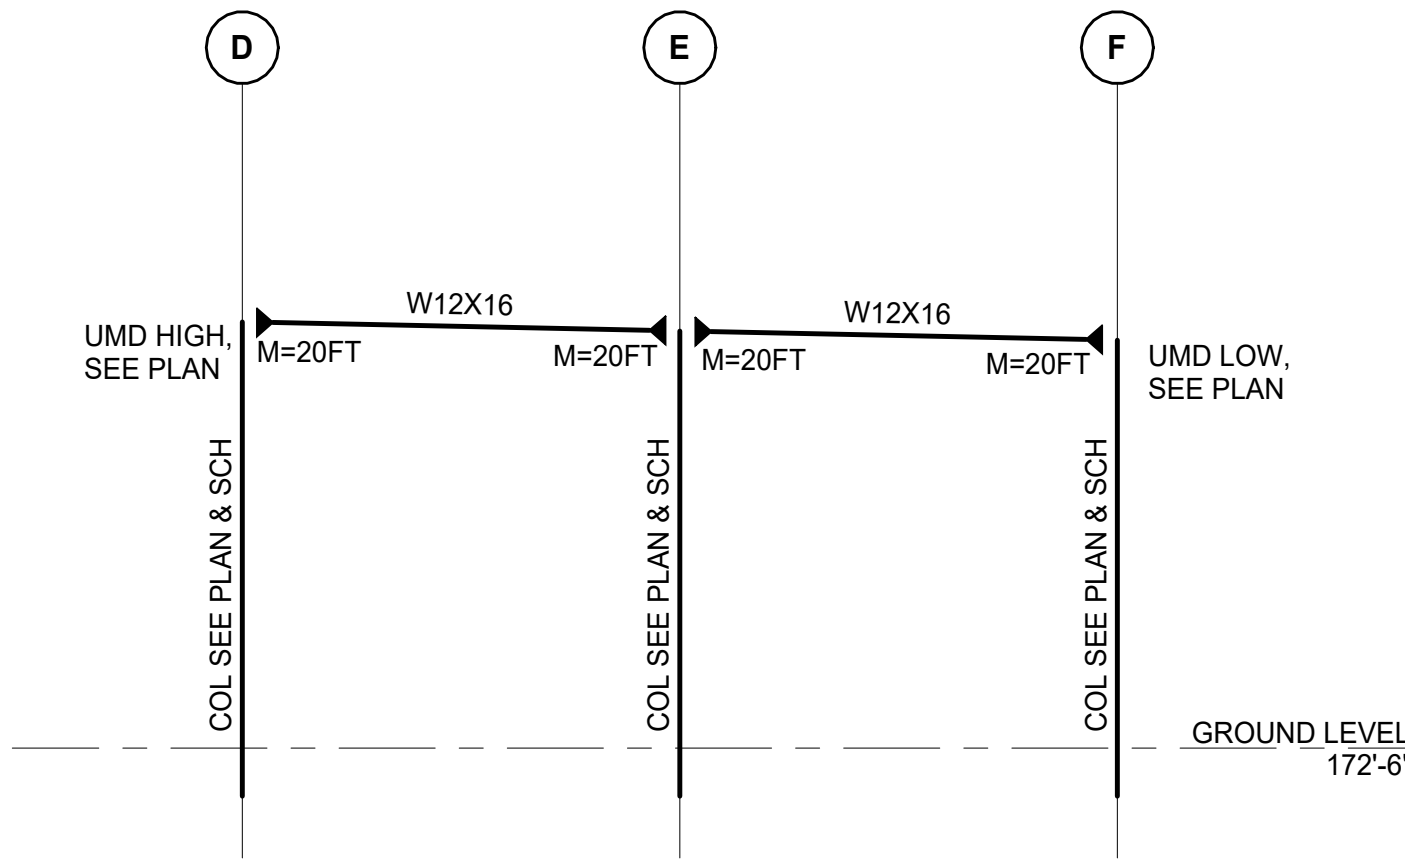

MF-1
SCALE: 1/8" = 1'-0"

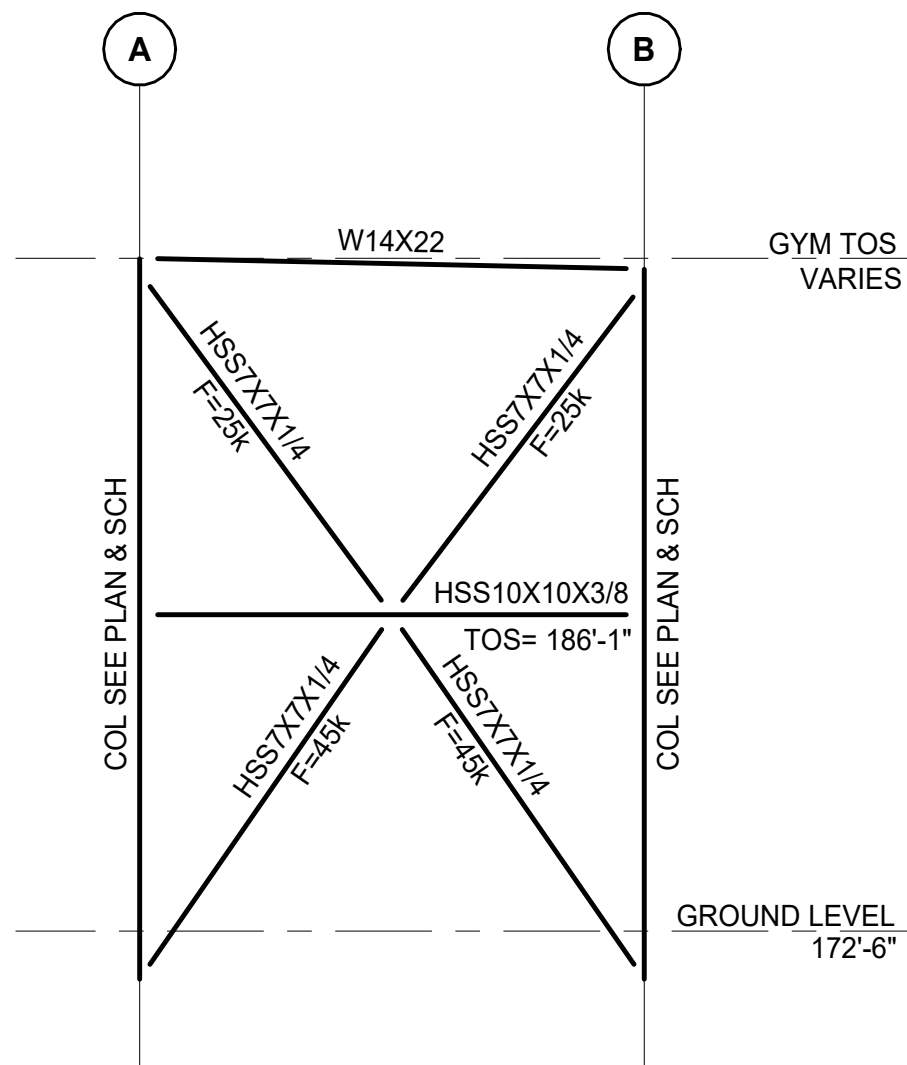


BF-6
SCALE: 1/8" = 1'-0"

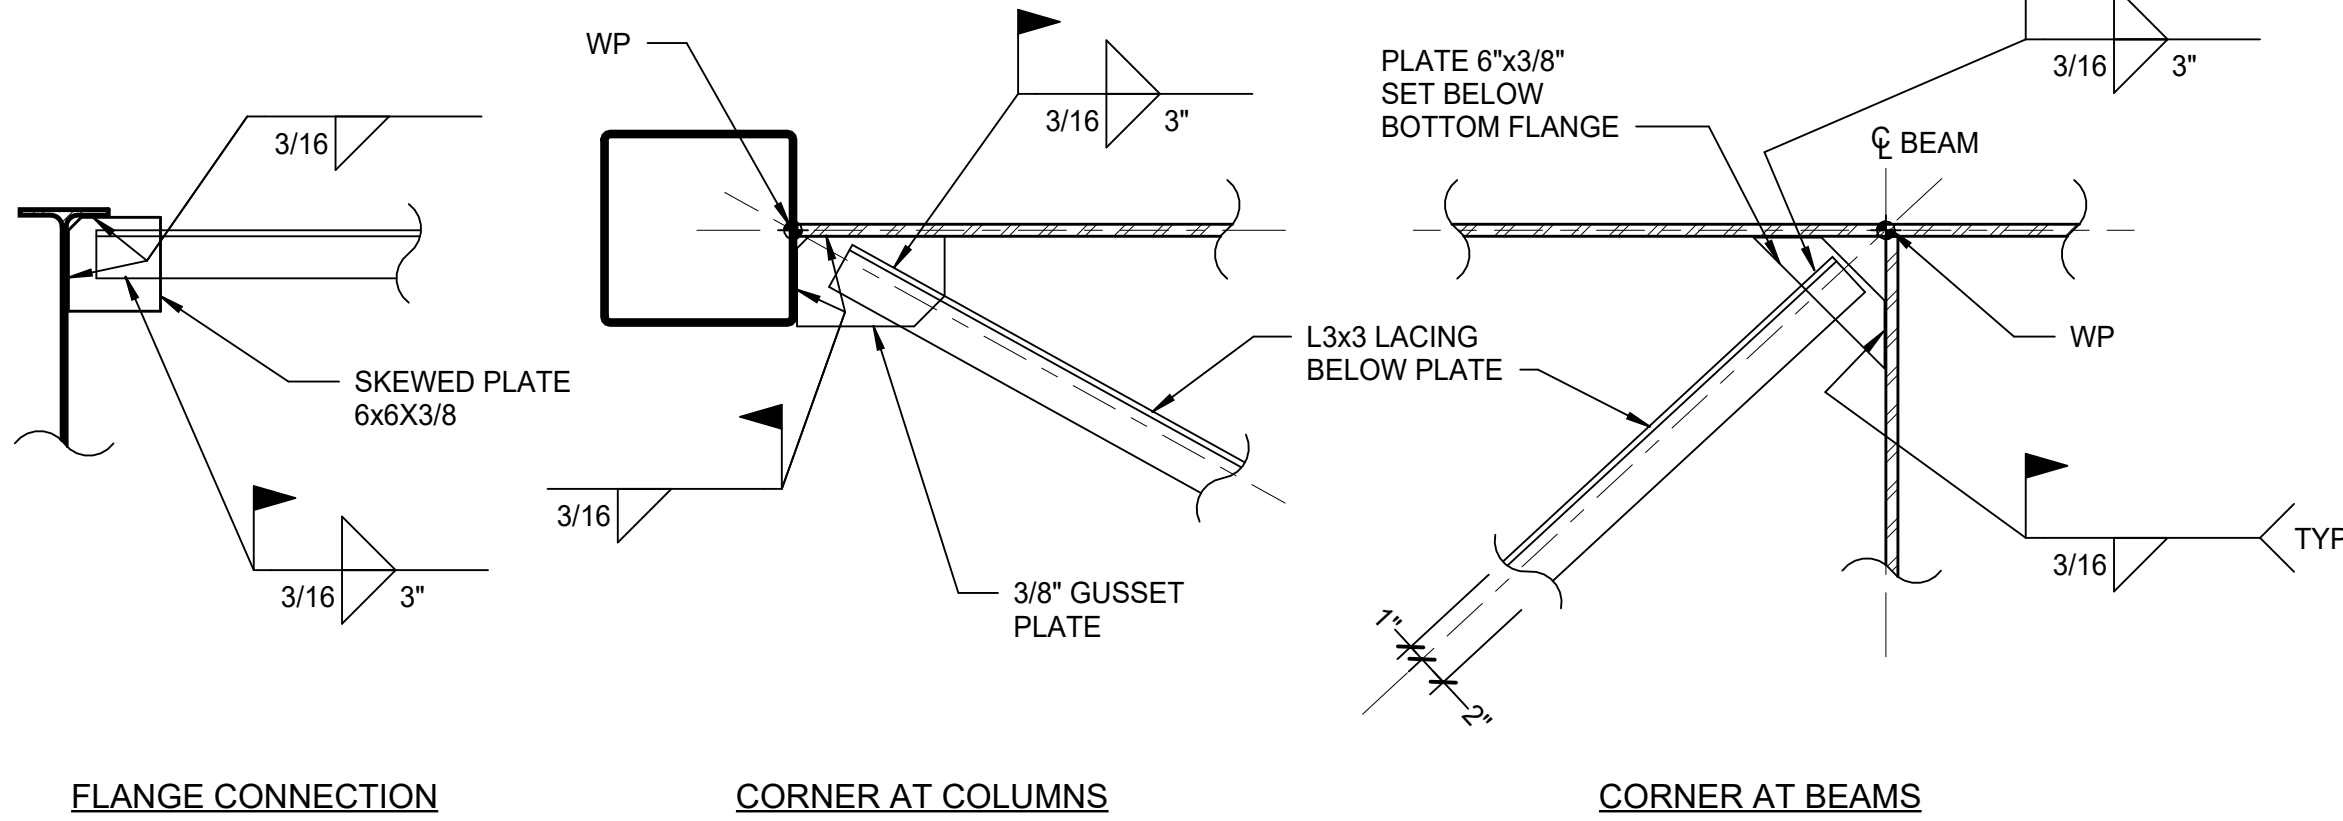

TYPICAL LACING CONNECTION

SECTION
SCALE: 1" = 1'-0"

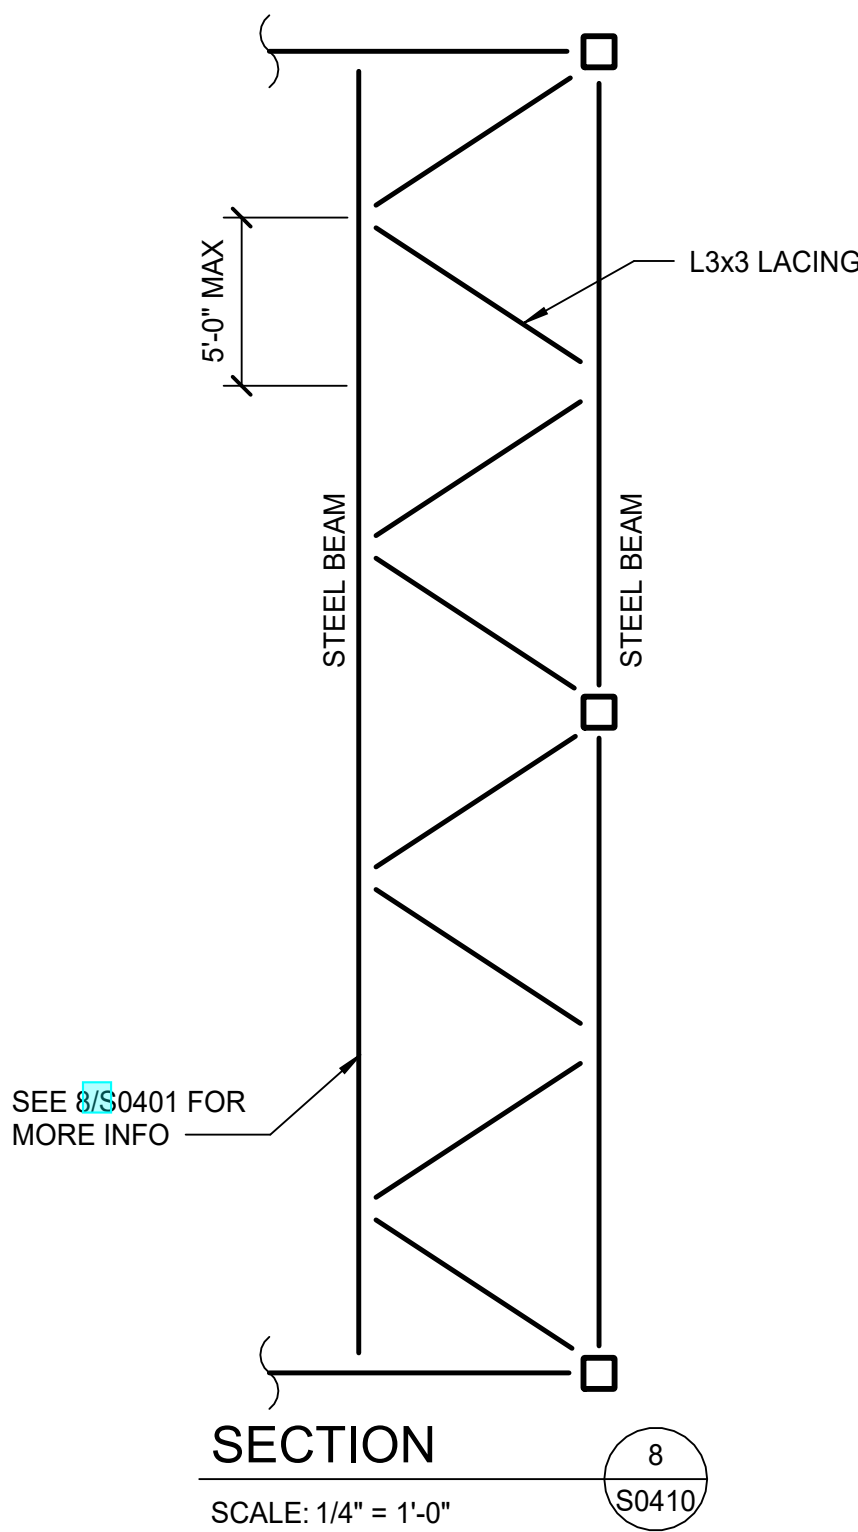

SECTION
SCALE: 1/4" = 1'-0"



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS RECREATION CENTER

611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehlert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056



ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS


NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025

BRACED FRAME ELEVATIONS AND DETAILS




S0410

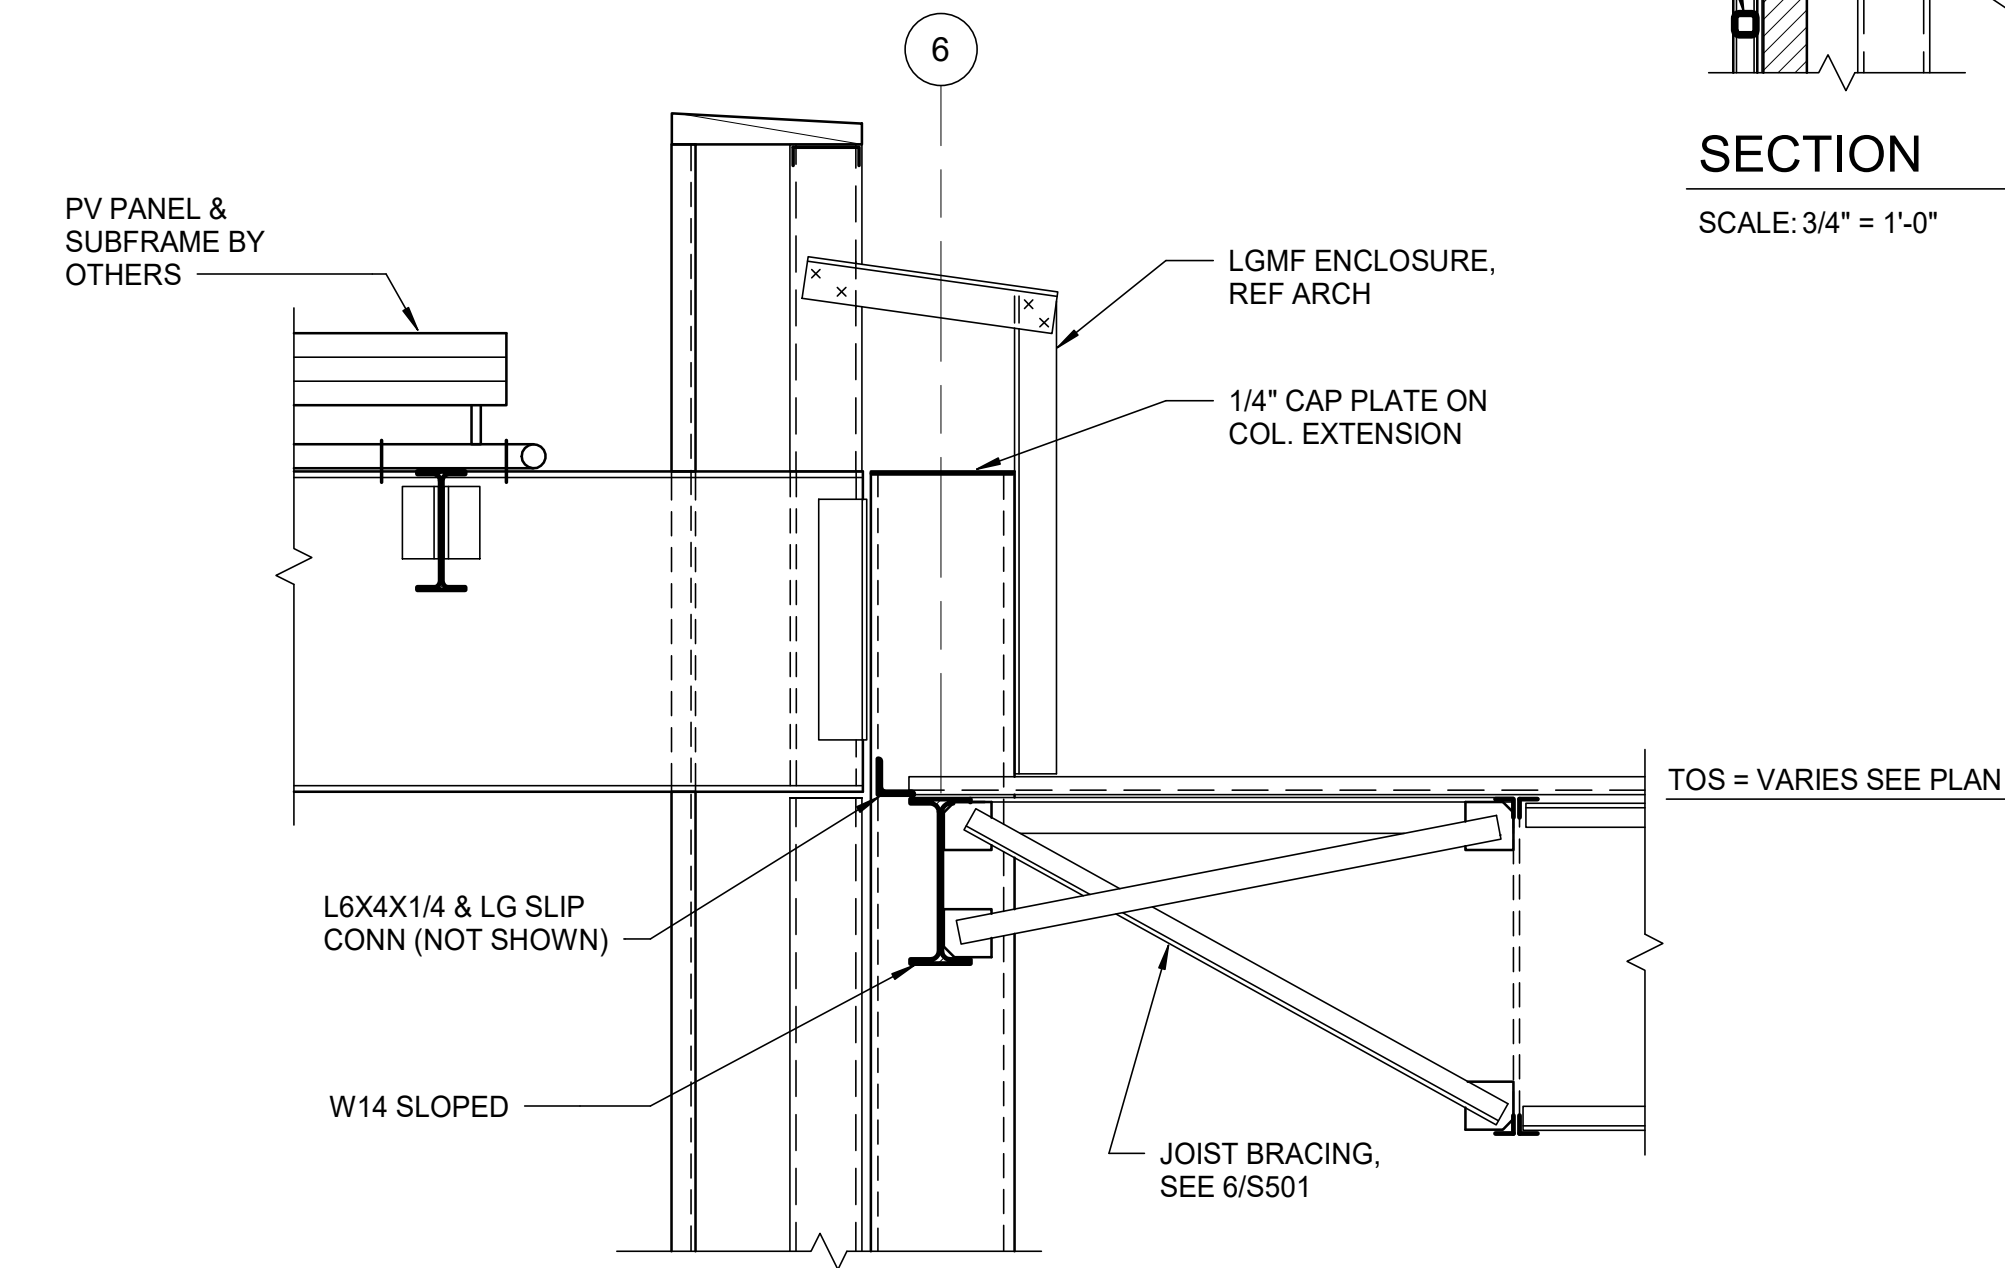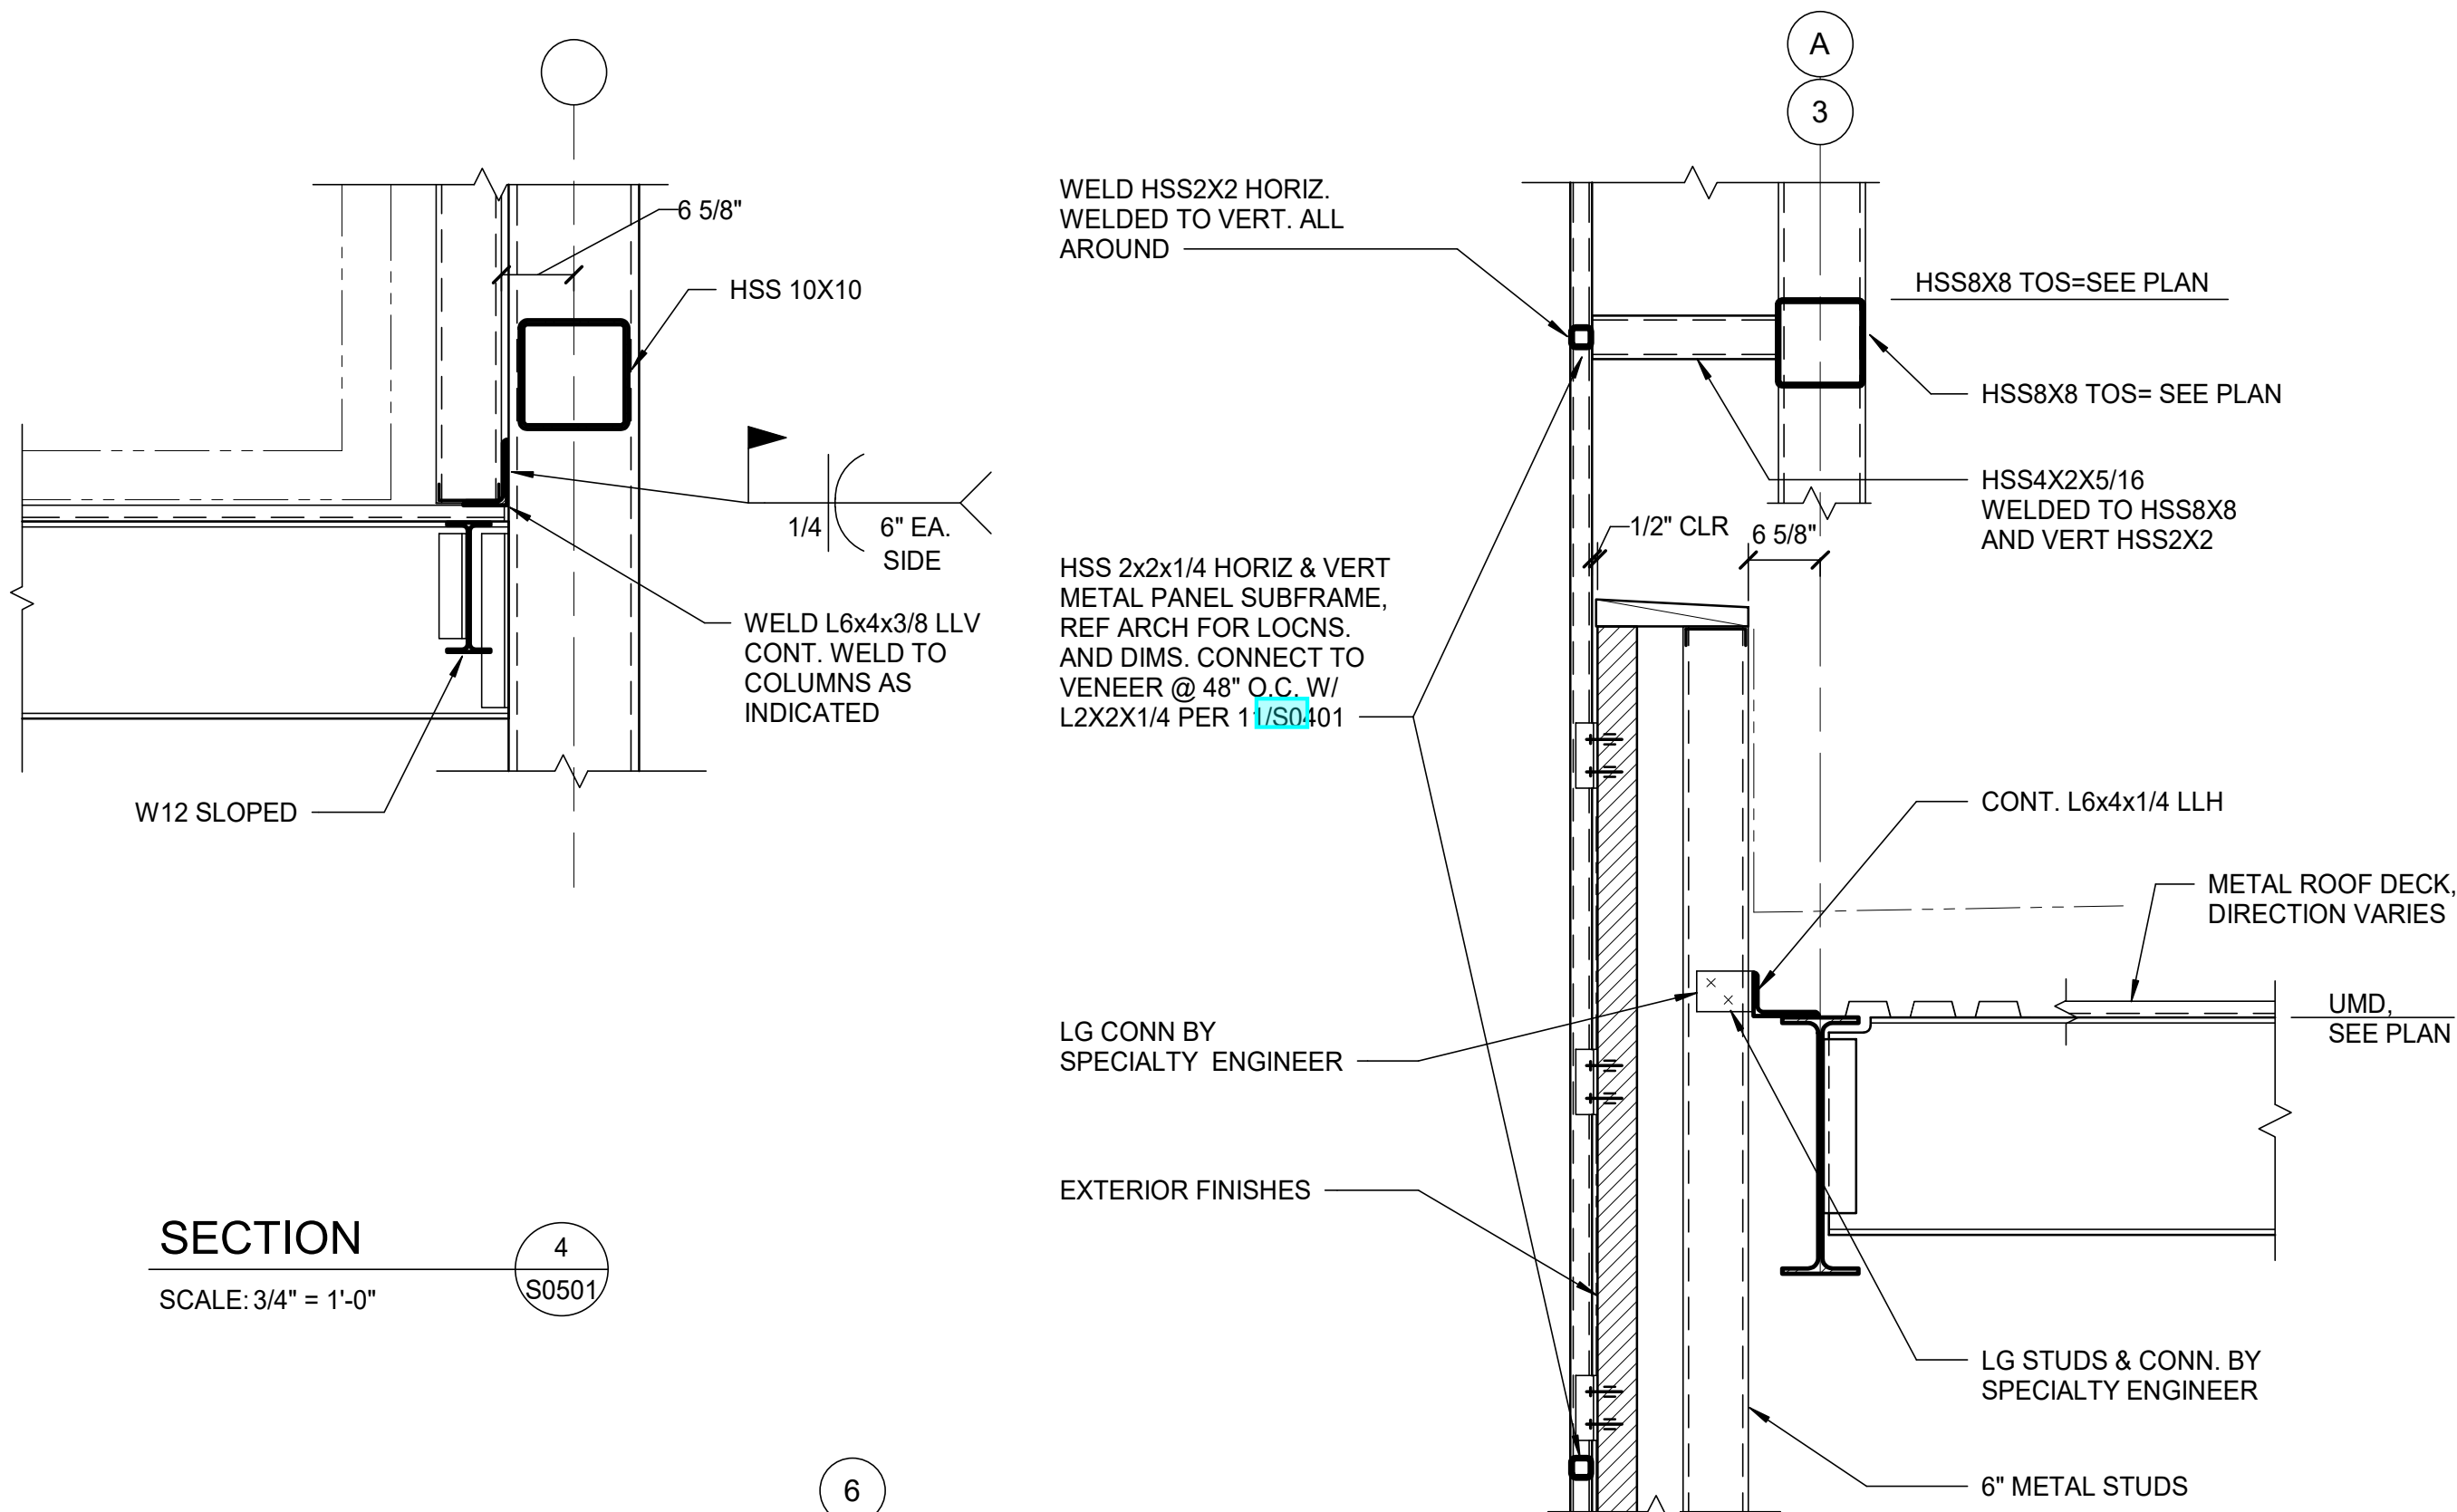



SECTION 7
SCALE: 3/4" = 1'-0"

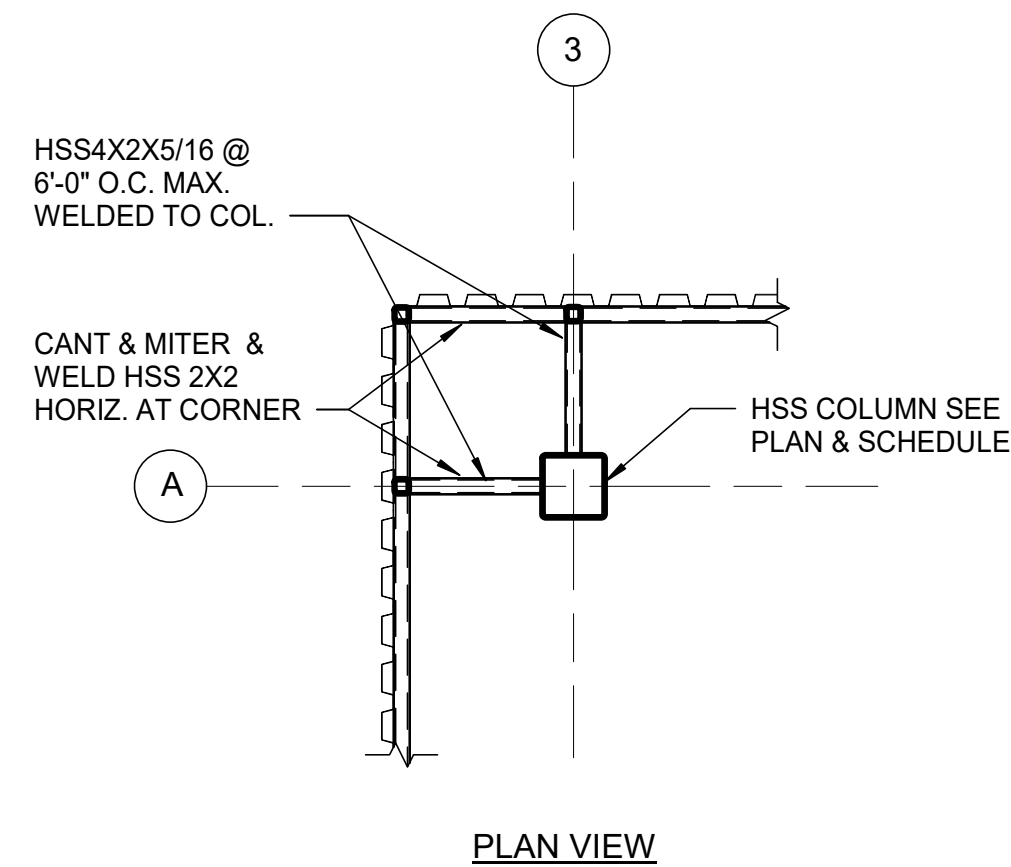


SECTION A
SCALE: 1/2" = 1'-0"

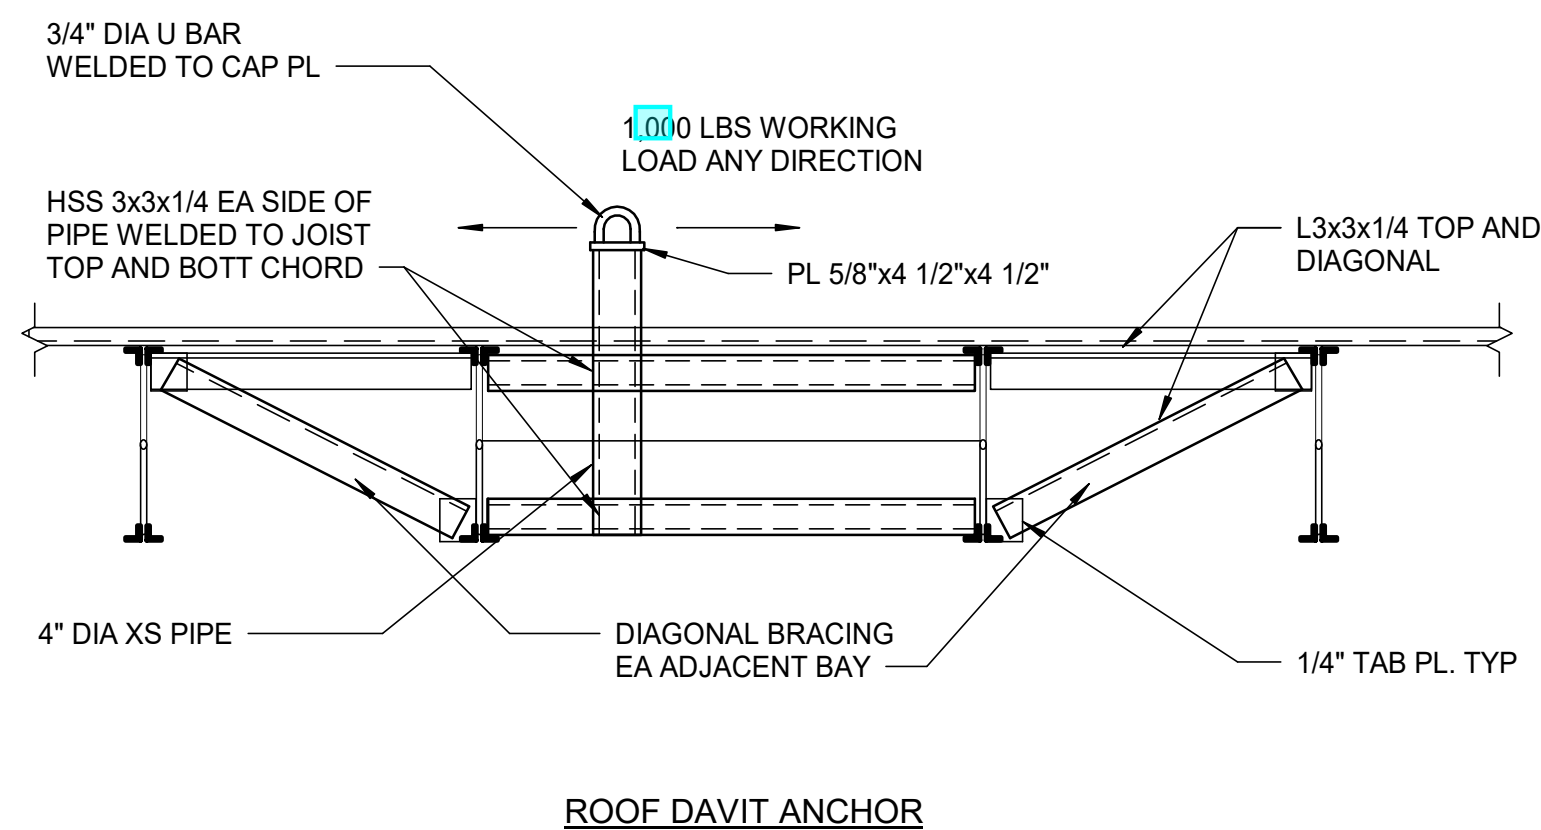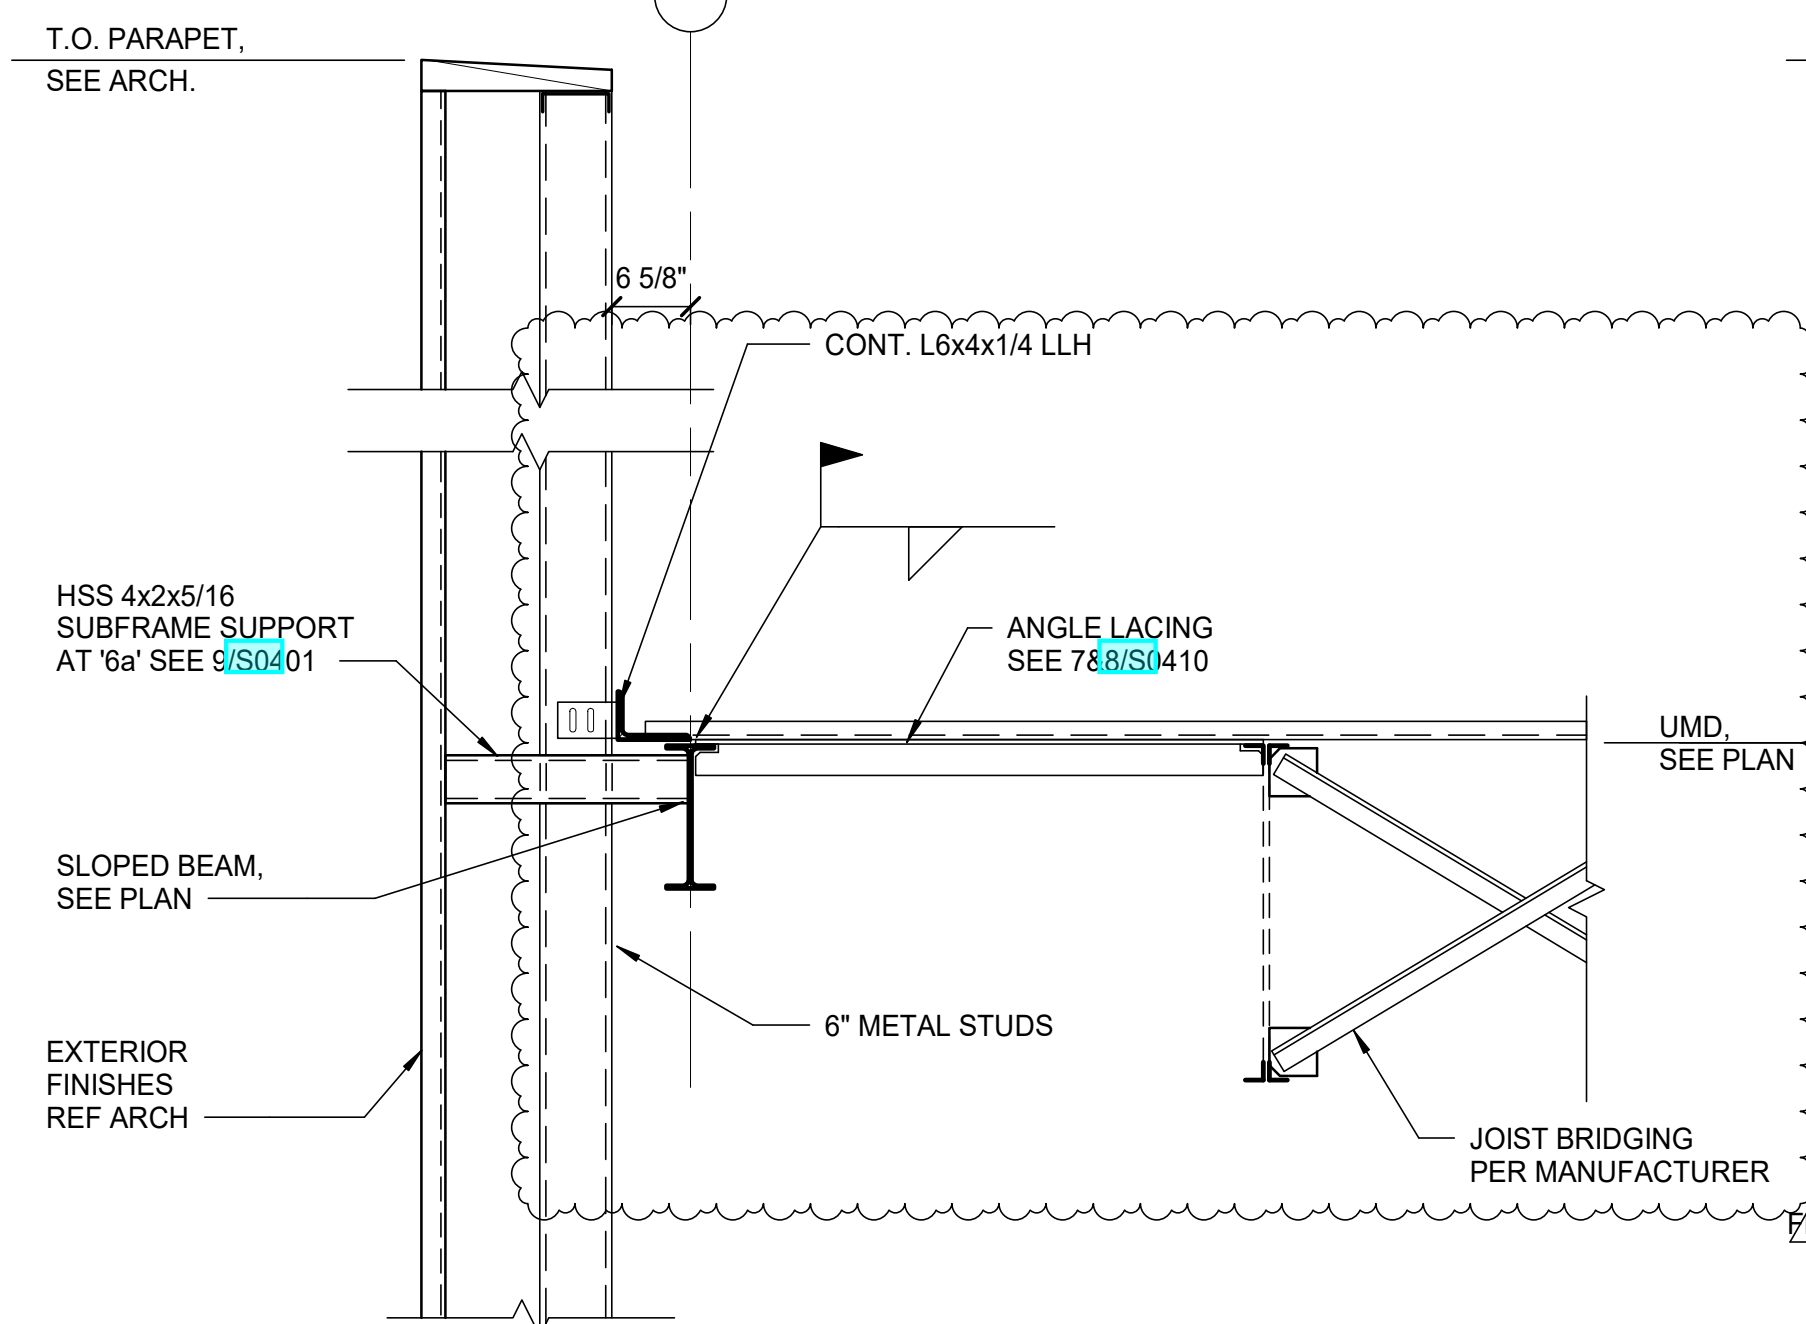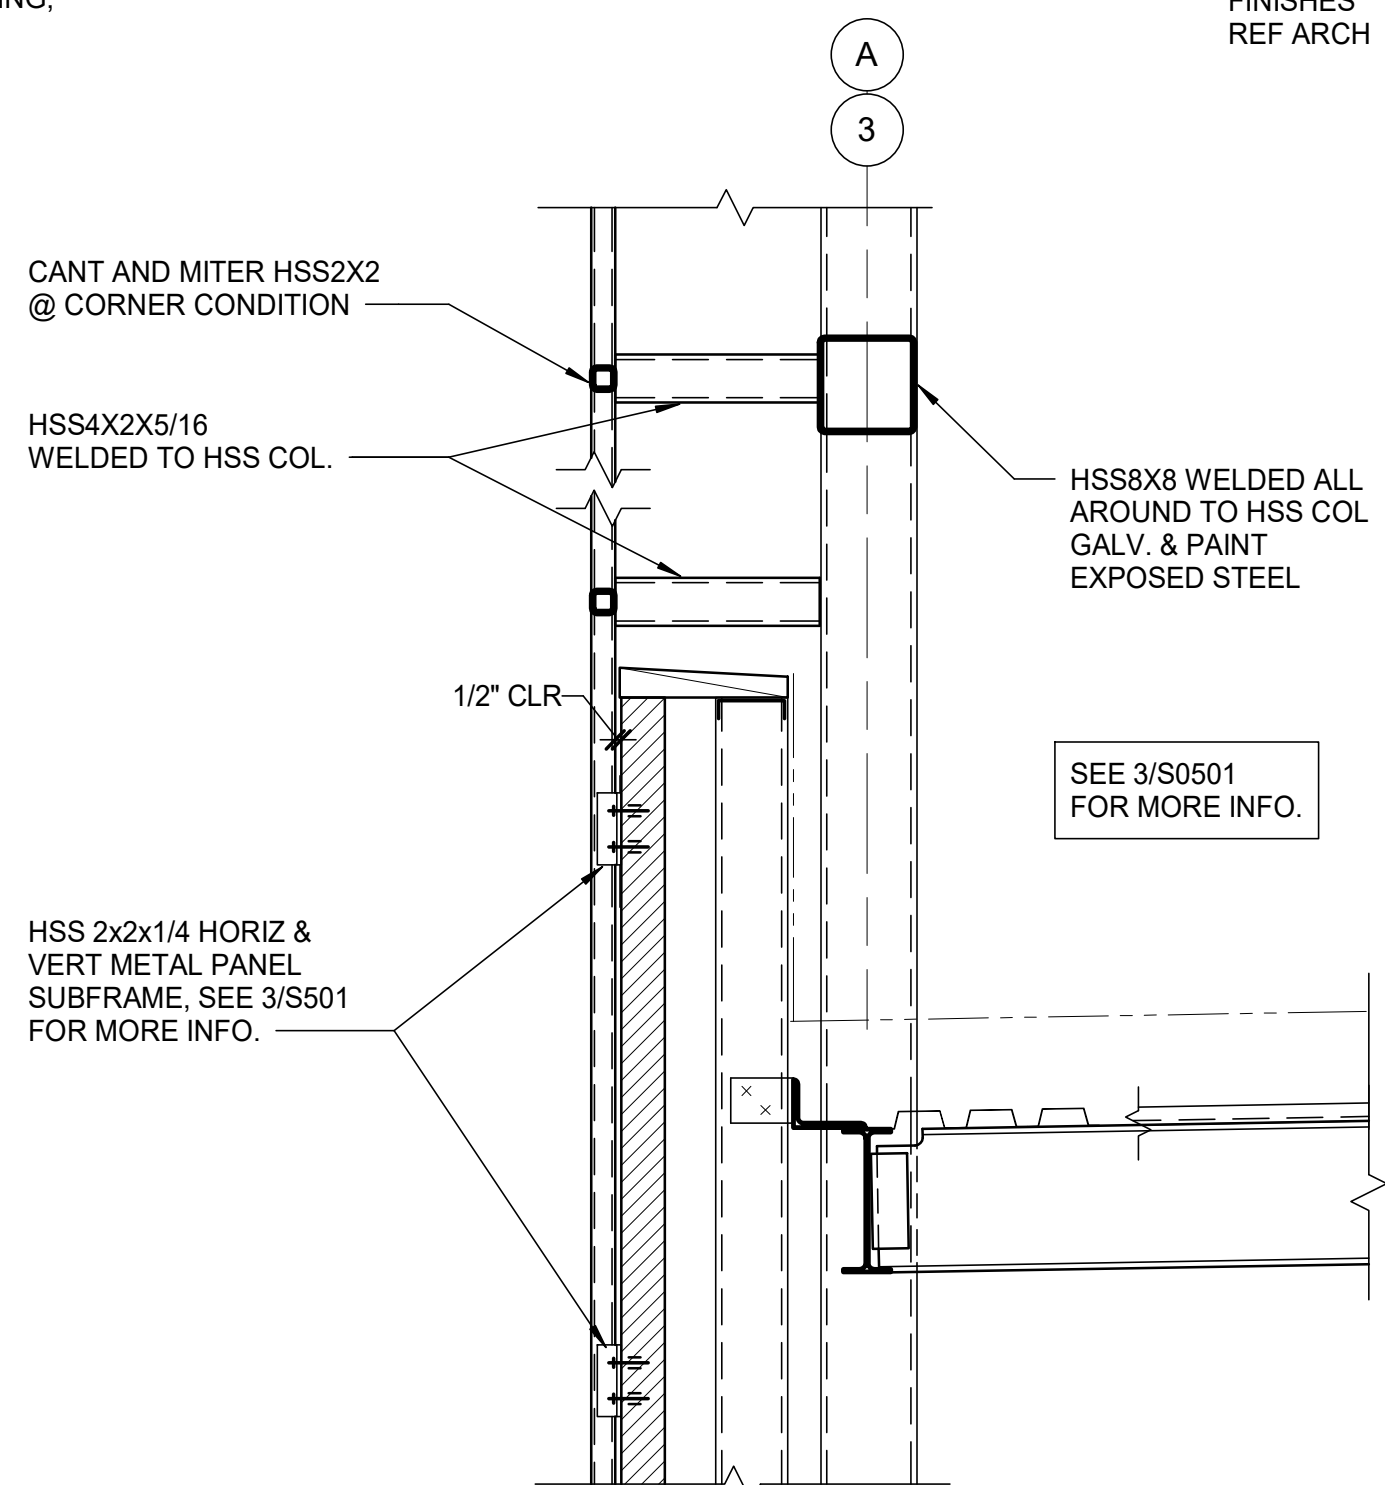


SECTION 9
SCALE: 3/4" = 1'-0"

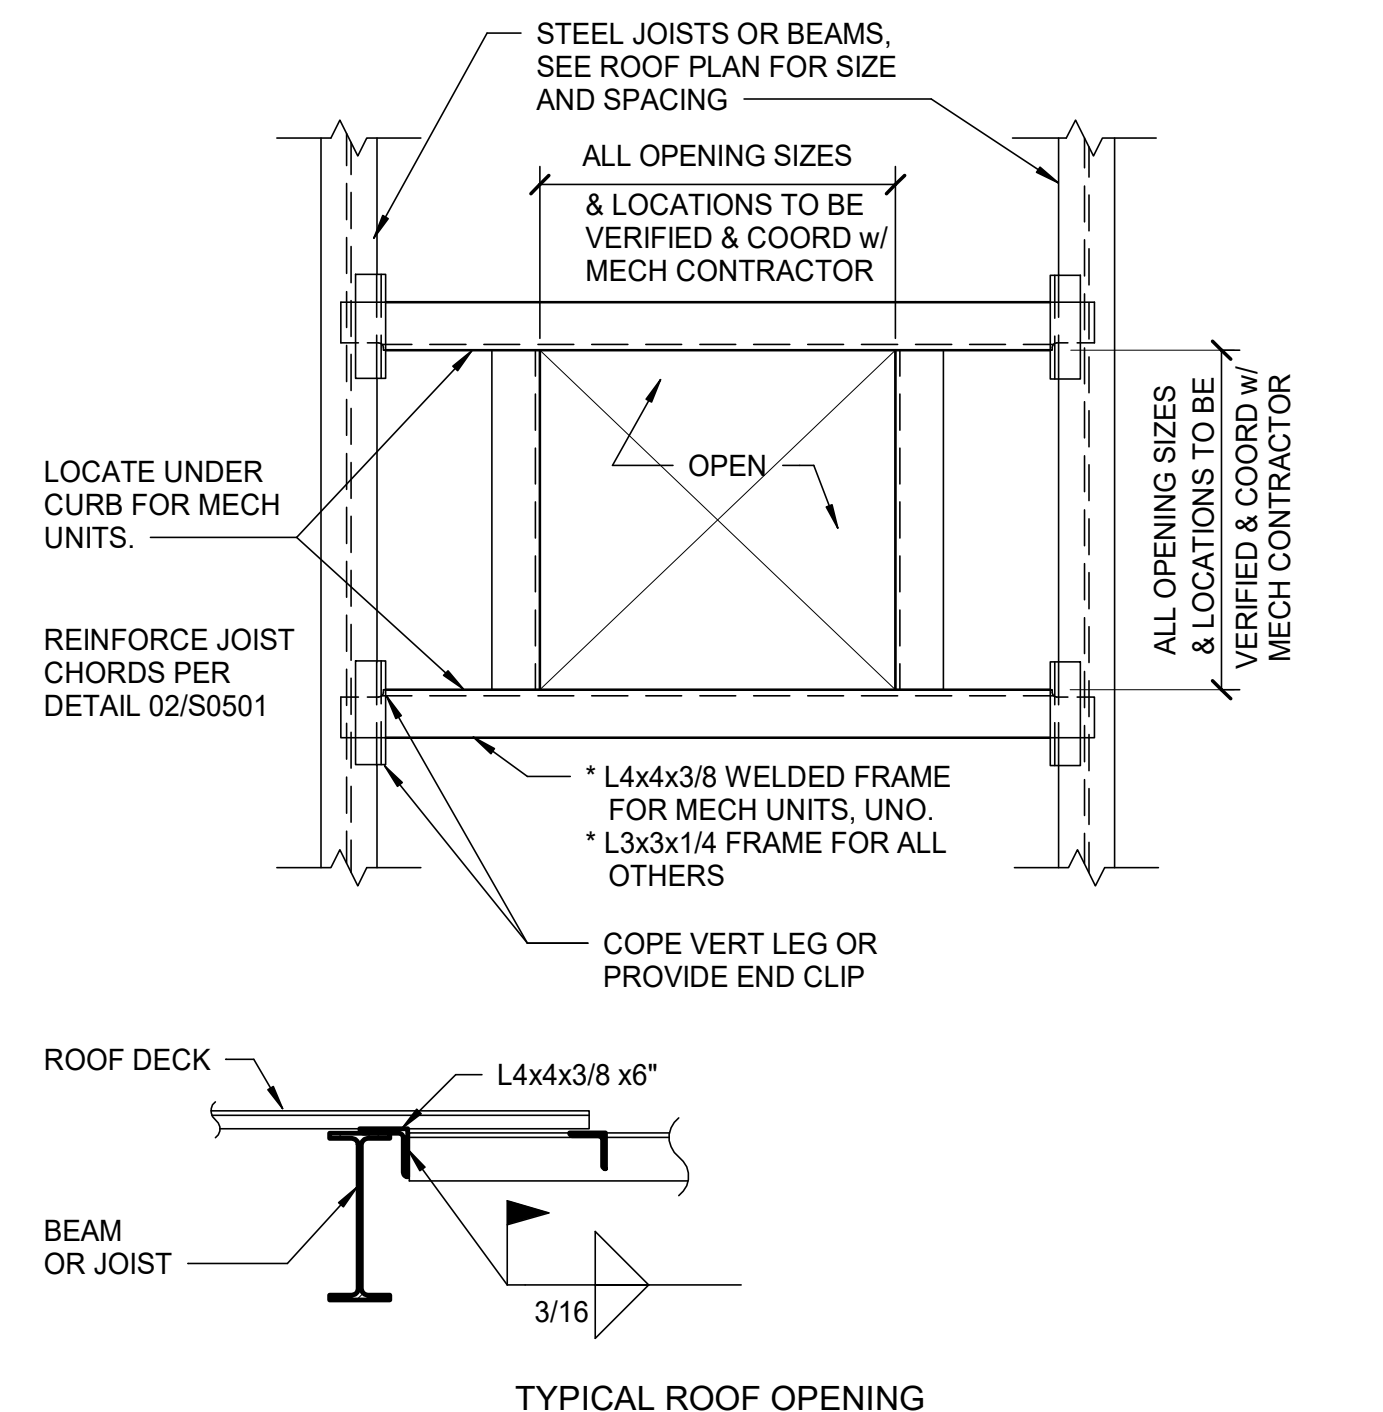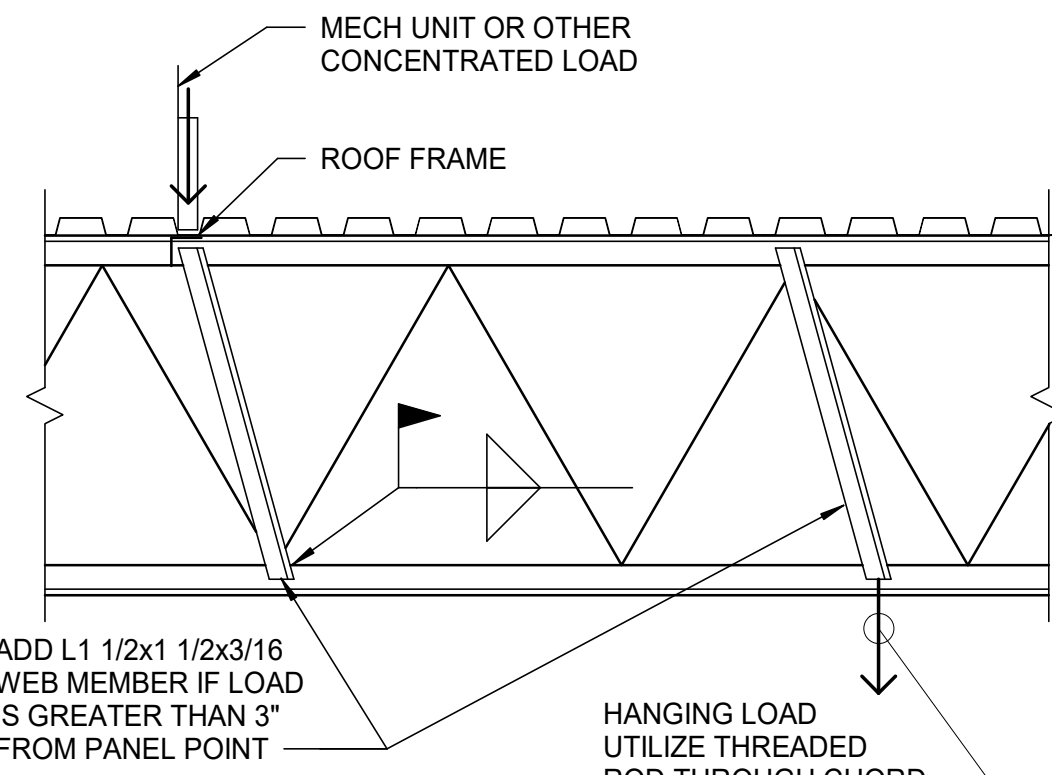

SECTION 1
SCALE: 3/4" = 1'-0"

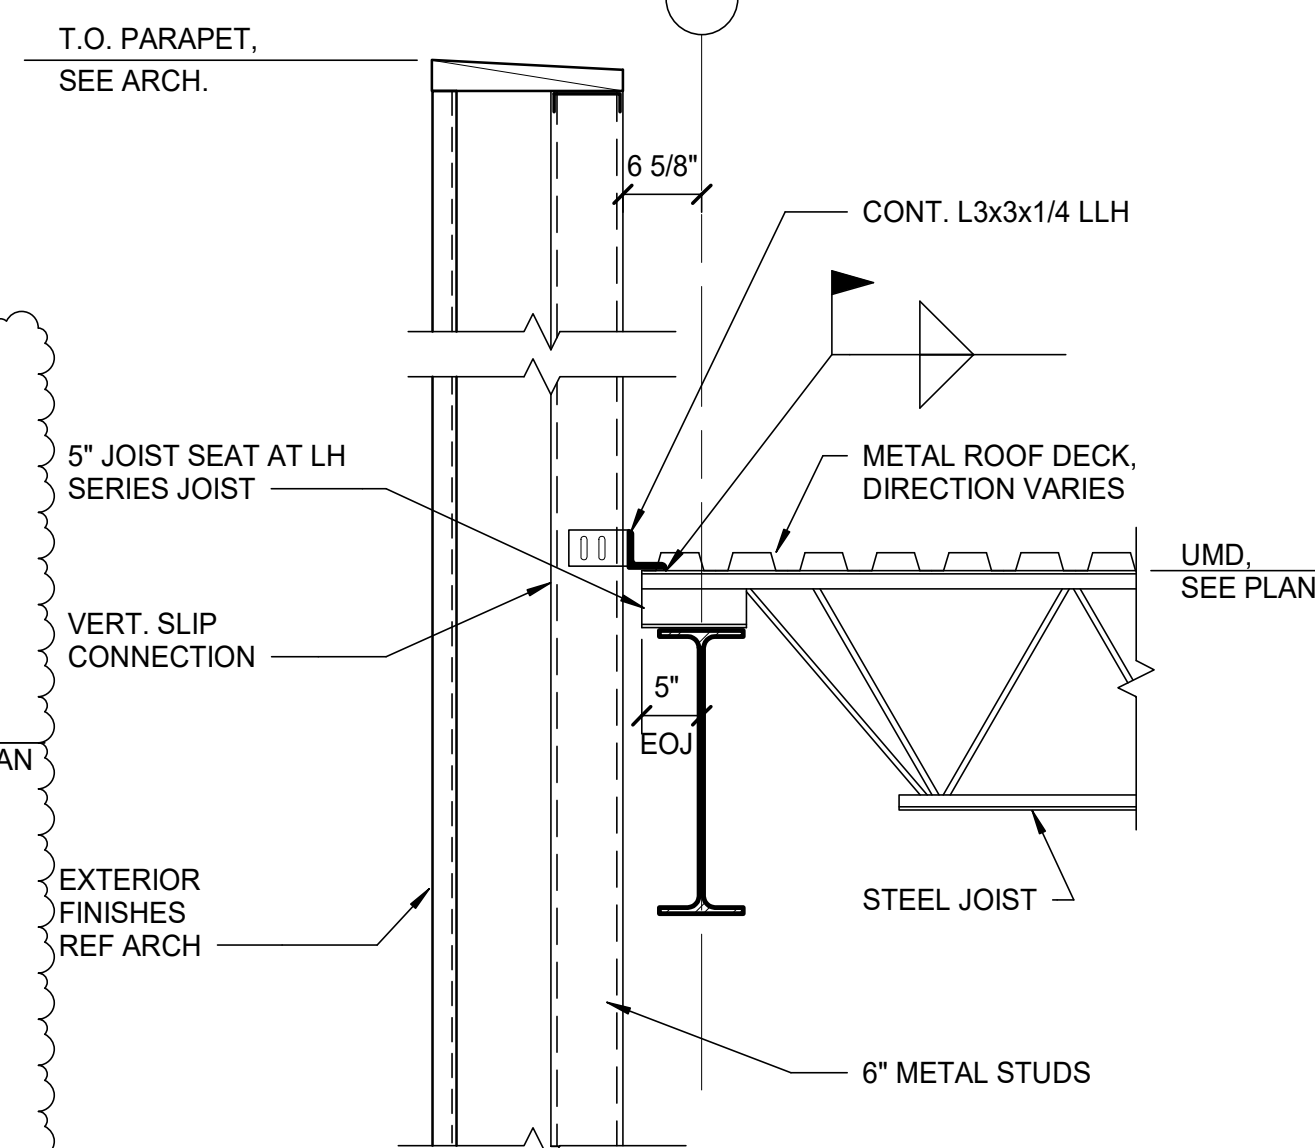

SECTION 5
SCALE: 3/4" = 1'-0"

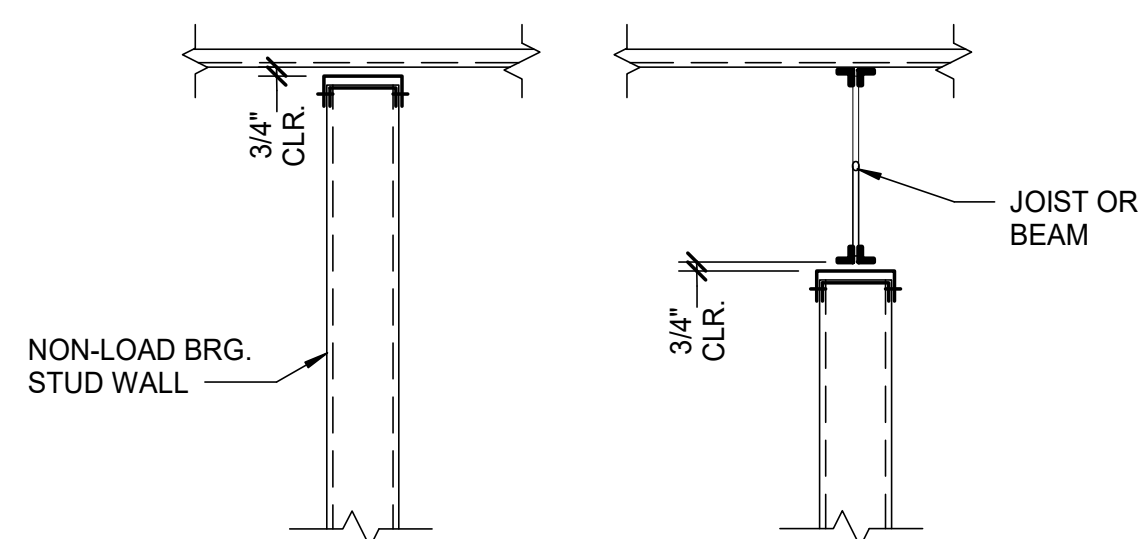

SECTION 8
SCALE: 3/4" = 1'-0"



StudioMB
1601 CONNECTICUT AVE NW
WASHINGTON DC 20009
TEL 202-506-7344
STUDIOMBDC.COM

CONGRESS HEIGHTS RECREATION CENTER

611 ALABAMA AVE, SE
WASHINGTON DC, 20032

CIVIL

AMT LLC
10 G Street, NE Suite 450
Washington, DC 20002

STRUCTURE

Ehliert Bryan
1420 K Street, NW Suite 1100
Washington, DC 20005

MEP

Interface Engineering, Inc
2000 M Street NW, Suite 270
Washington DC 20036

LANDSCAPE

BRADLEY SITE DESIGN, INC.
1010 Wisconsin Ave NW #620,
Washington, DC 20007
T: 202.695.8056

ISSUE FOR CONSTRUCTION 2/18/2026

ISSUES / REVISIONS

NO.	DESCRIPTION	DATE
A	STEEL PACKAGE	9/29/2025
FB-1	FIELD BULLETIN 1	3/24/2026

ROOF FRAMING SECTIONS

S0501