

GENERAL

ERAI

WHERE

- DESIGN DATA**
1. BUILDING CODE:
2018 IBC (INTERNATIONAL BUILDING CODE)

- A. BASIC DESIGN WIND SPEED (3-SECOND GUST) = 111 MPH
B. ALLOWABLE STRESS DESIGN WIND SPEED V_{asd} = 86 MPH
C. RISK CATEGORY = II
D. EXPOSURE CATEGORY = C

- SUBMITTALS**
1. THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS AND/OR CALCULATIONS TO THE ENGINEER OF RECORD FOR REVIEW PRIOR TO CONSTRUCTION. THE REQUIRED SHOP DRAWING SUBMITTALS INCLUDES, BUT IS NOT LIMITED TO:

- CONSTRUCTION PROCEDURES AND SAFETY REQUIREMENTS**
1. THE CONTRACT STRUCTURAL DRAWINGS AND SPECIFICATIONS REPRESENT THE FINISHED STRUCTURE. UNLESS OTHERWISE INDICATED, THEY DO NOT INDICATE THE MEANS OR METHODS OF CONSTRUCTION.

FOUNDATION CONSTRUCTION

- CAST-IN-PLACE CONCRETE CONSTRUCTION**
1. ALL CONCRETE WORK SHALL CONFORM TO THE REQUIREMENTS OF ACI 318, BUILDING CODE REQUIREMENTS FOR REINFORCED

3. CONCRETE SLAB REINFORCING:
A. FOR INTERIOR SLABS-ON-GRADE :
1. WAREHOUSE, SERVICE BAYS, LUBE ROOM, HOSE-ASSEMBLY ROOM, AUXILIARY BUILDING:
A. NOVOMESH 950, ADDED A RATE OF 5 LB/CUBIC YARD.

19. CONCRETE SHALL BE SAMPLED AND TESTED FOR COMPRESSIVE STRENGTH, SLUMP, AIR CONTENT AND TEMPERATURE. FOR COMPRESSIVE STRENGTH TESTS, CONCRETE SAMPLES SHALL BE TAKEN IN ACCORDANCE WITH ASTM C172 AT THE POINT OF DELIVERY, HANDLED AND STANDARD-CURED IN ACCORDANCE WITH ASTM C31, AND TESTED IN ACCORDANCE WITH ASTM C39. FOR EACH TEST, EIGHT CONCRETE CYLINDERS SHALL BE PREPARED, WITH TWO (2) TESTED AT SEVEN (7) DAYS, ONE (1) AT 14

CONCRETE MASONRY CONSTRUCTION

- STRUCTURAL STEEL**
1. ALL STEEL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS, LATEST


2025 11 25 11:25:00 AM

- MISCELLANEOUS METALS (STAIR, RAILINGS AND LADDERS)**
1. THE MISCELLANEOUS METALS SUPPLIER SHALL BE RESPONSIBLE FOR THE DESIGN OF ALL STAIRS, RAILINGS AND THEIR

PROPER BONDING AGENT MUST BE USED TO ENDS

STEEL JOISTS

- METAL DECKING**
1. INSTALLATION OF ALL DECKING SHALL BE IN STRICT ACCORDANCE WITH THE STEEL DECK INSTITUTE (SDI) SPECIFICATIONS AND WITH





S001

1
S103

ROOF FRAMING PLAN NOTES:

2. ALL ELEVATIONS NOTED THIS "X" ARE REFERENCED TO FIRST FLOOR TOP OF SLAB ELEVATION = (+0'-0").
3. JOIST BEARING ELEVATIONS VARY. SLOPE MASONRY WALLS AND BEAMS. ACCORDINGLY, WHERE REQUIRED, FOR BEARING ELEVATIONS, ALL JOISTS SHALL HAVE 1/2" DEEP JOIST SIZES MEASURED AT CENTERLINE OF SUPPORT DUE TO ROOF SLOPE OF 12" PER FOOT.
4. JOIST BRIDGING SHALL BE DESIGNED AND PROVIDED BY JOIST MANUFACTURER IN ACCORDANCE WITH THE STEEL JOIST INSTITUTE'S DESIGN GUIDE.
5. ROOF DECK SHALL BE 1/2" S282 DECK FASTENED TO SUPPORT W/ 5/8" DIA. PUDDLE WELDS IN 304 FASTENER PATTERN AT ALL SUPPORTS AND AT 12" O.C. AT BEAMS PARALLEL TO DECK W/ 5/8" DIA. FASTENERS & 12" O.C. BETWEEN SUPPORTS, UNO.N. OF DECK SHALL BE 1/2" S282 DECK FASTENED TO SUPPORT W/ 5/8" DIA. PUDDLE WELDS IN 304 FASTENER PATTERN.
6. ALL ROOF PENETRATION LOCATIONS ARE APPROXIMATE. COORDINATE W/ HVAC CONTRACTOR FOR EXACT LOCATIONS. PROVIDE FRAMING FOR ALL ROOF PENETRATIONS AS SHOWN IN THE TYPICAL ROOF PENETRATION FRAMING DETAIL.
7. DETAILS AS SHOWN INDICATE TYPICAL CONNECTIONS AND CONDITIONS.
8. REFER TO ARCHITECTURAL DRAWINGS FOR TOP OF NON-LOAD BEARING WALL HEIGHTS.
9. SEE ARCHITECTURAL AND MEP DRAWINGS FOR EXACT LOCATIONS OF ROOF TOPS, ROOF DRAINS, AND ROOF VENTS.
10. SEE ARCHITECTURAL DRAWINGS FOR DIMENSIONS AND ELEVATIONS NOT SHOWN.
11. PROVIDE 1/2"x1/4" WICKER TO BRACE BOTTOM FLANGE OF BEAM TO JOIST. TYPICAL AT BRACED FRAME BEAMS WITH CHEVRON CONNECTIONS.
12. REFER TO SECT 5303 FOR MINIMUM SHEAR CONNECTION DESIGN LOADS FOR WIDE FLANGE BEAMS. UNLESS A LARGER REACTION IS NOTED IN THE SECT 5303. PASS-THROUGH (TRANSFER) FORCES ARE NOTED ON JOIST PLAN. REFER TO SECT 5302 FOR BRACING MEMBER DESIGN LOADS.

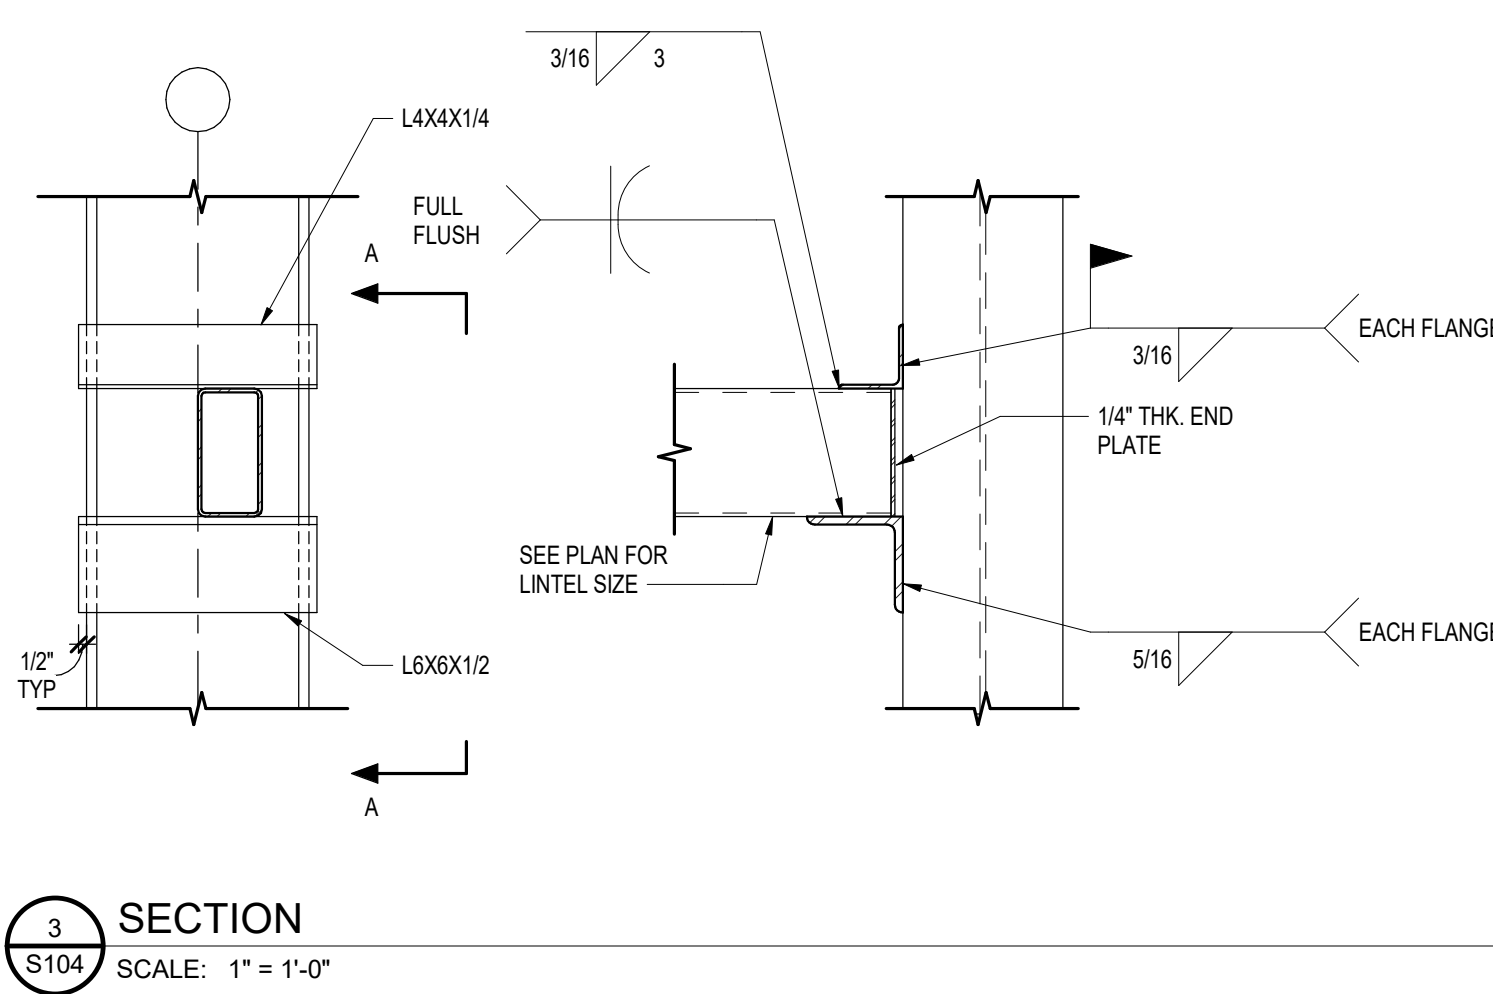


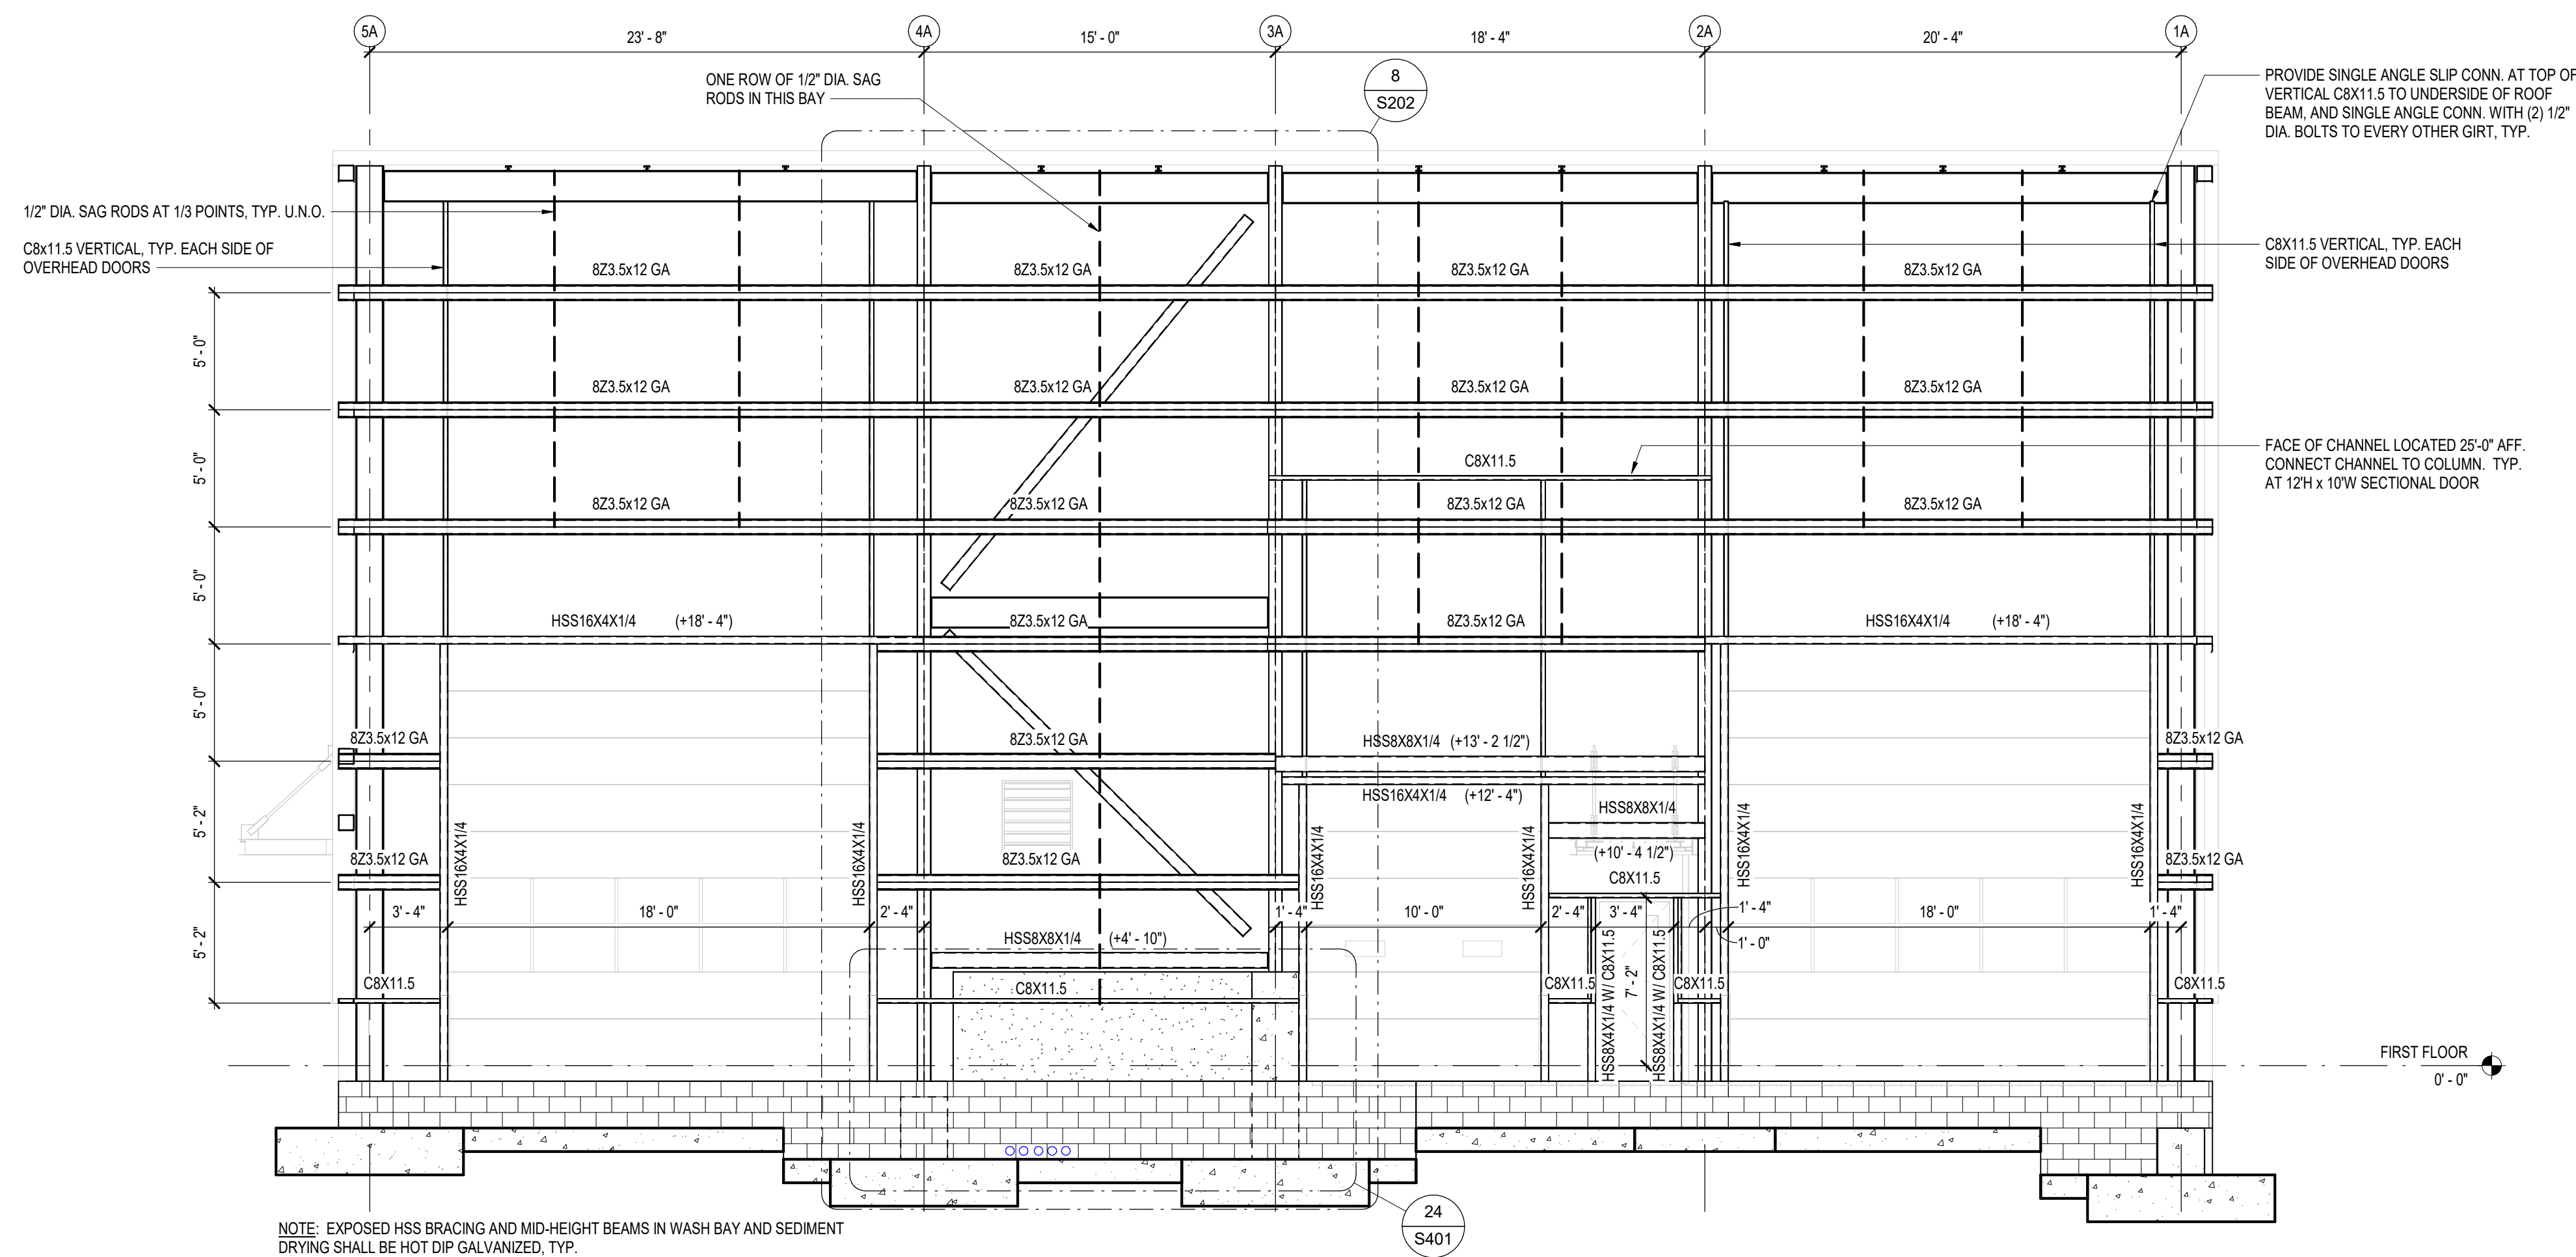

1
S201


AUXILIARY BUILDING EXTERIOR WALL FRAMING
ELEVATION - NORTH WALL ON LINE AA

SCALE: 3/16" = 1'-0"

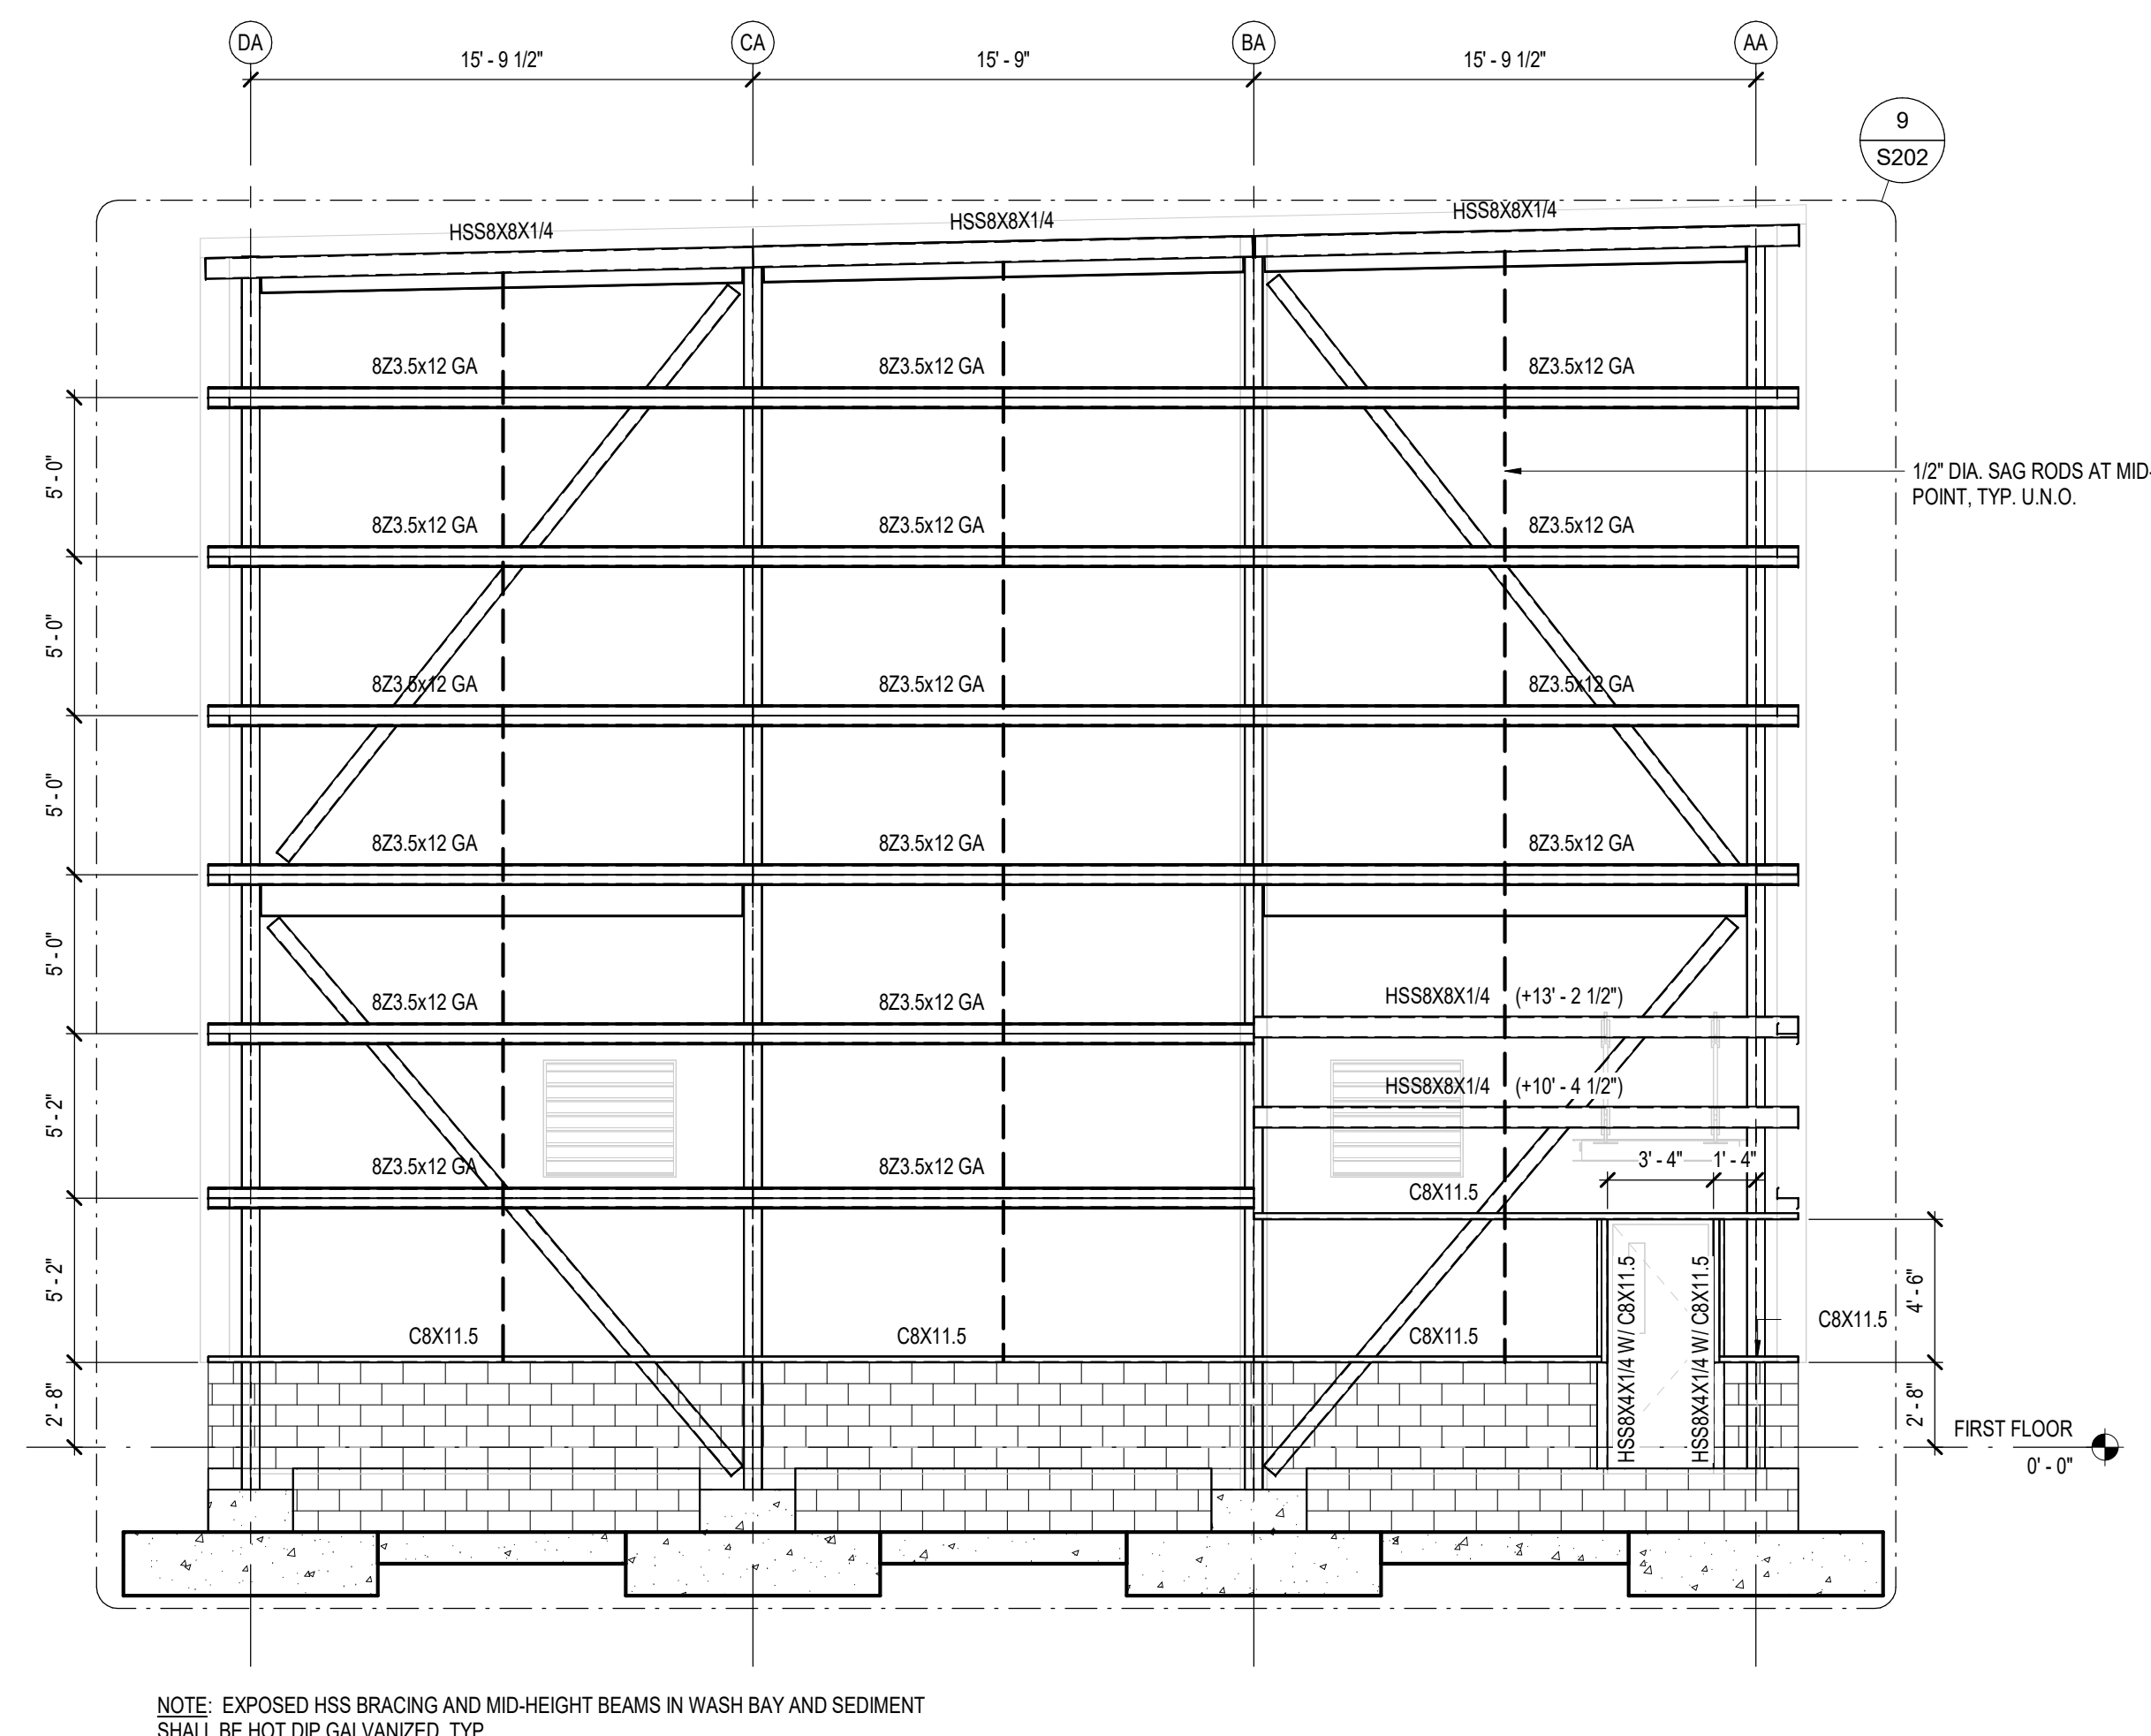


AUXILIARY BUILDING EXTERIOR WALL FRAMING
ELEVATION - EAST WALL ON LINE 5A

2
S201 SCALE: 3/16" = 1'-0"



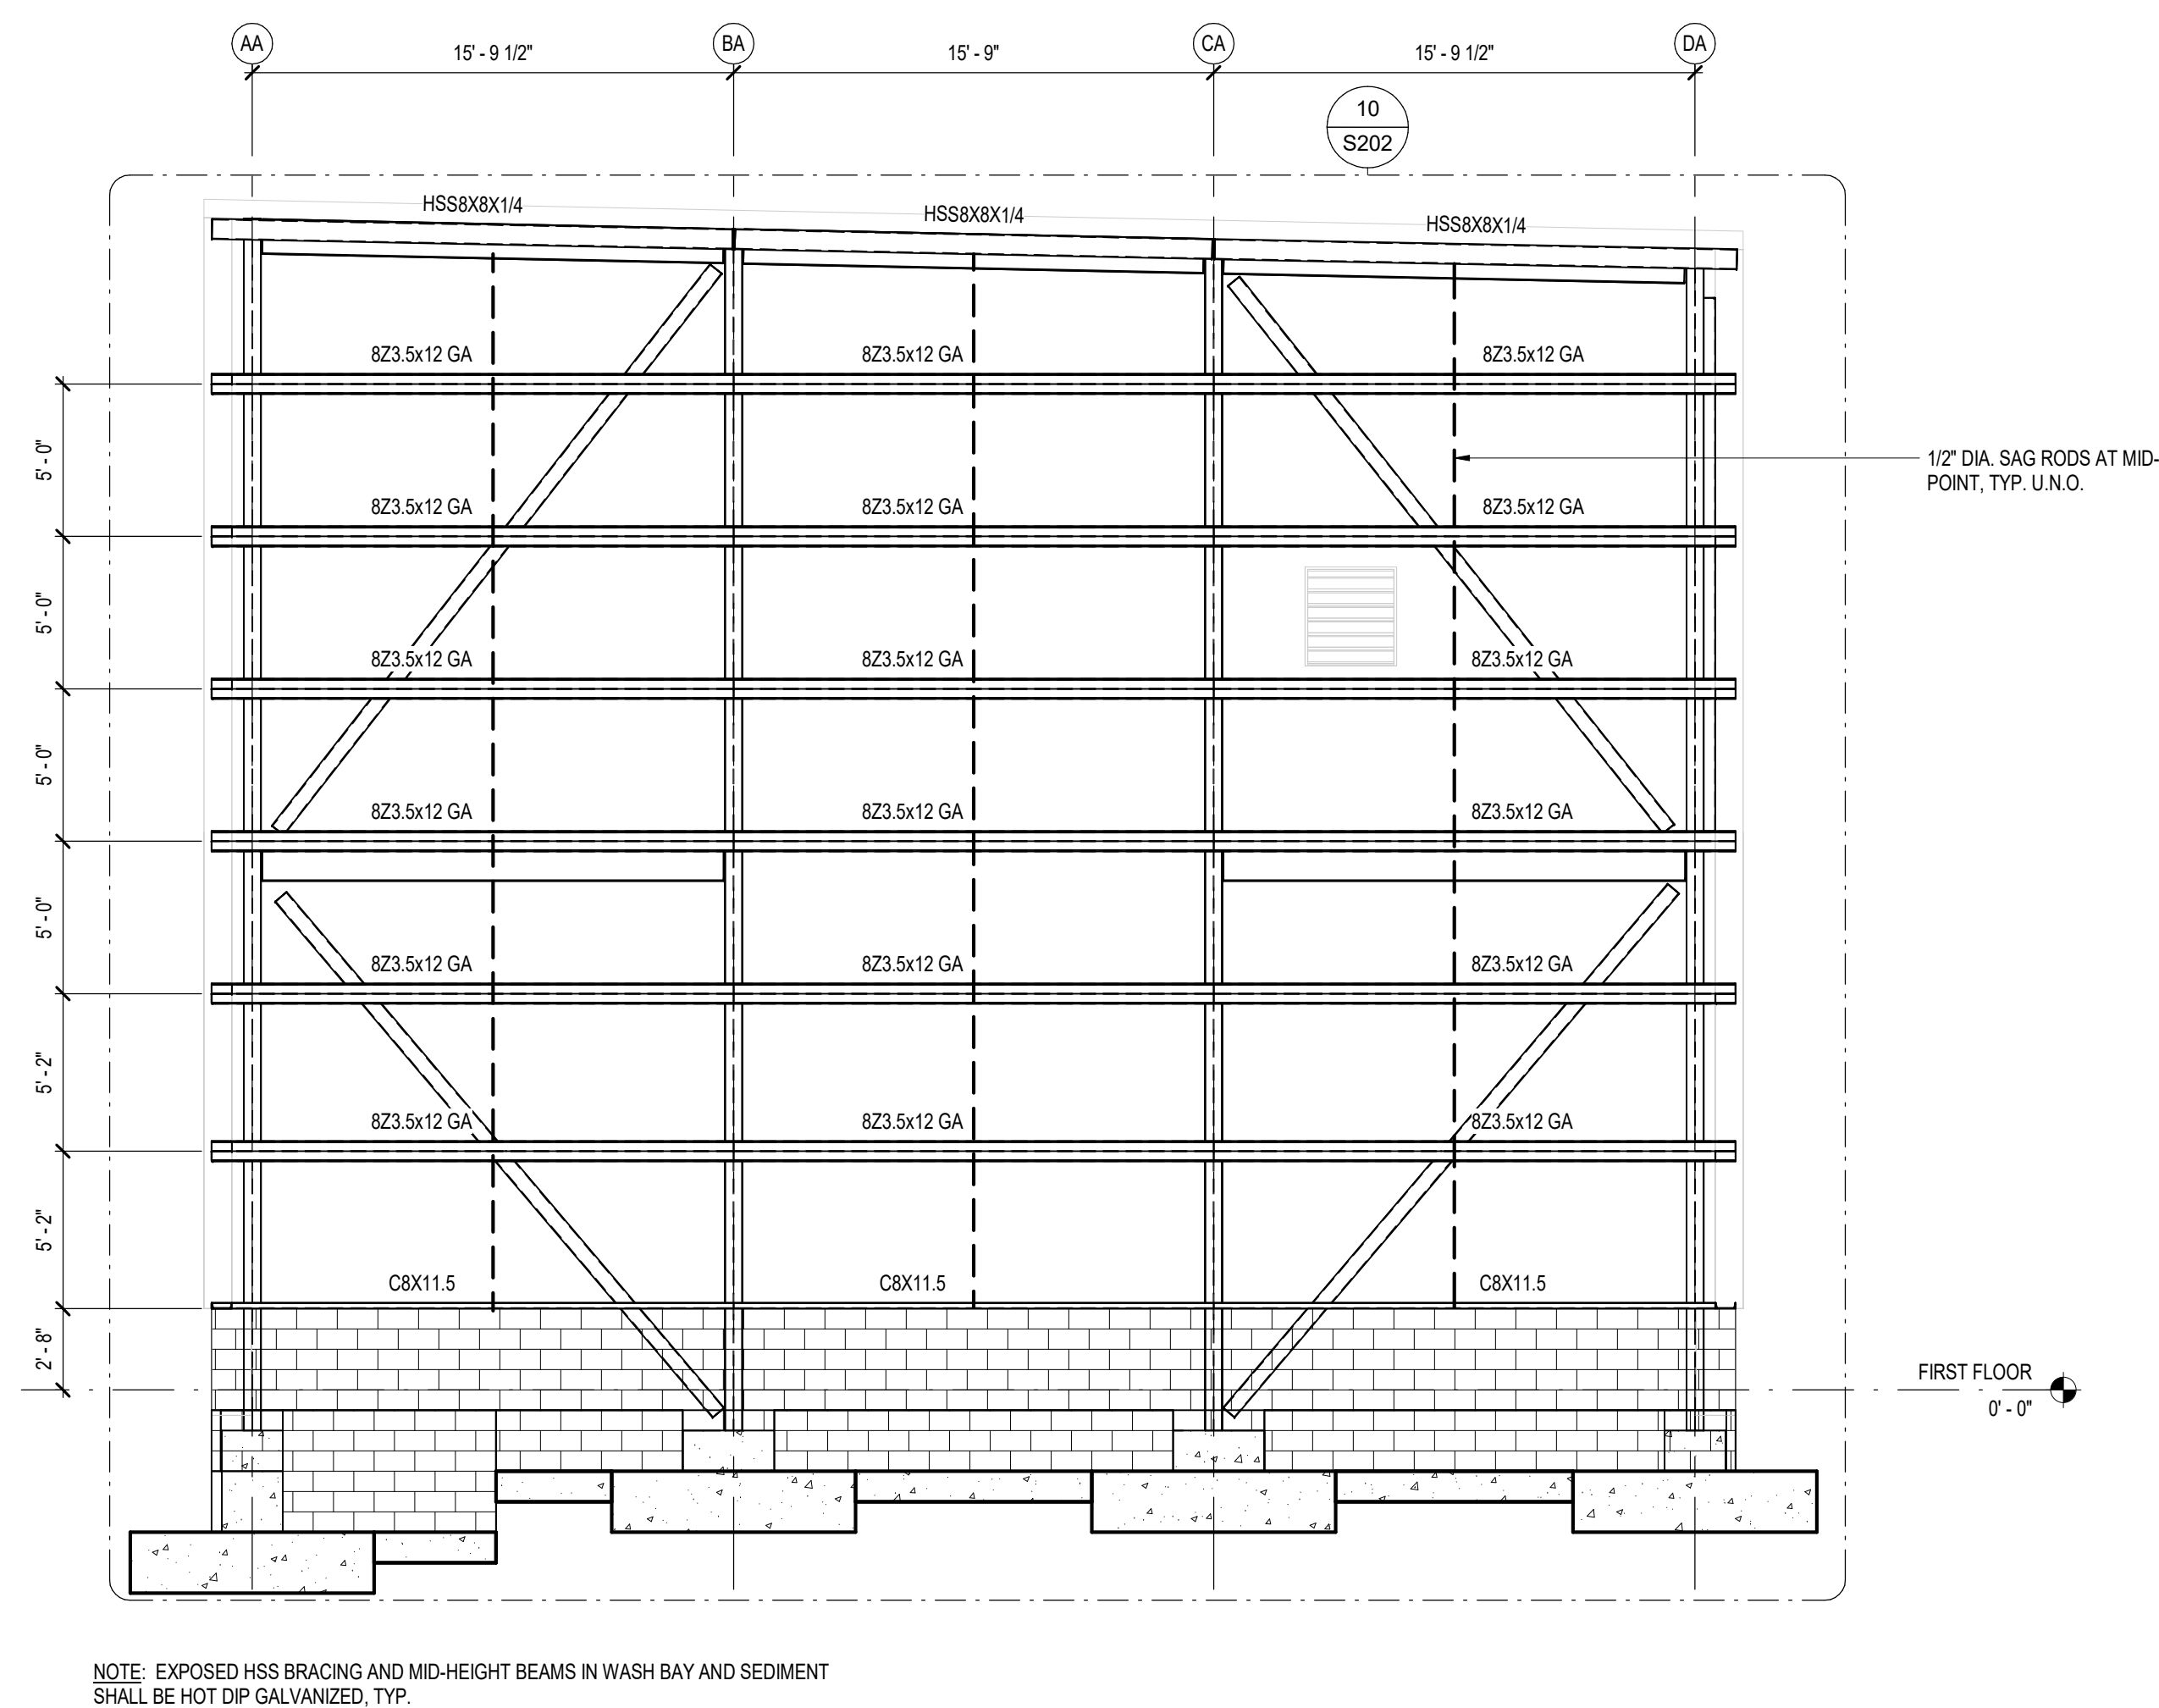


AUXILIARY BUILDING EXTERIOR WALL FRAMING
ELEVATION - WEST WALL ON LINE 1A
SCALE: 3/16" = 1'-0"

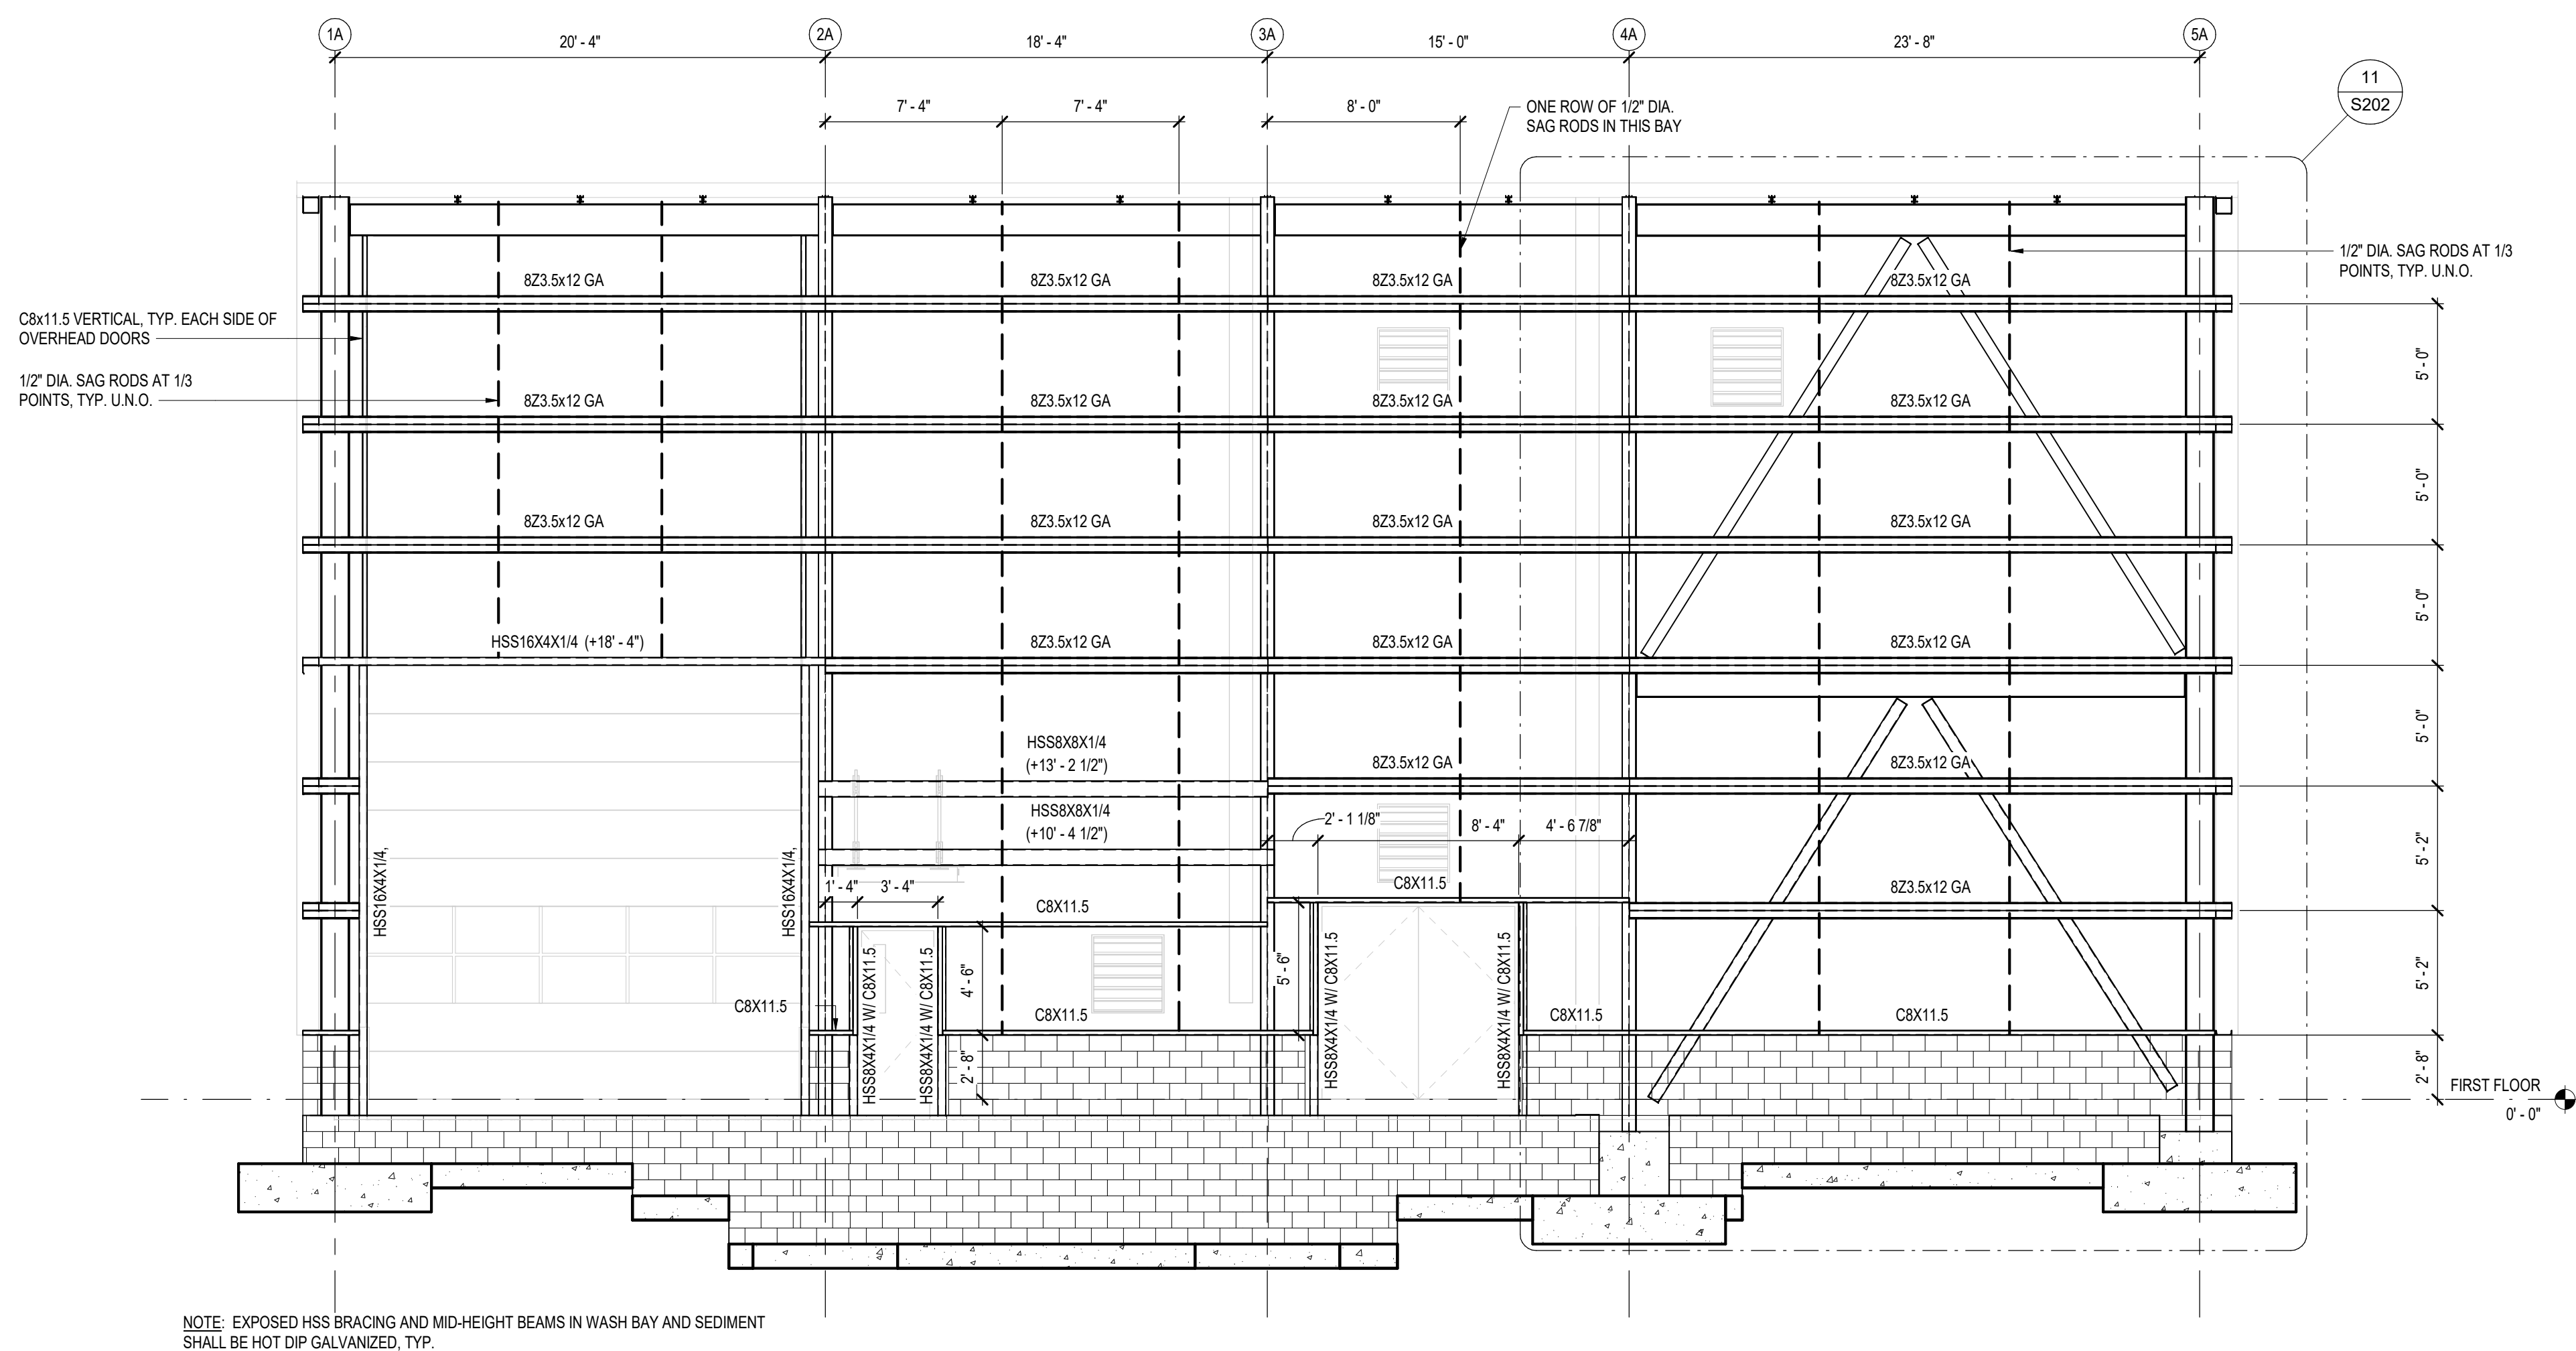

AUXILIARY BUILDING EXTERIOR WALL FRAMING
ELEVATION - SOUTH WALL ON LINE DA


4
S201 SCALE: 3/16" = 1'-0"

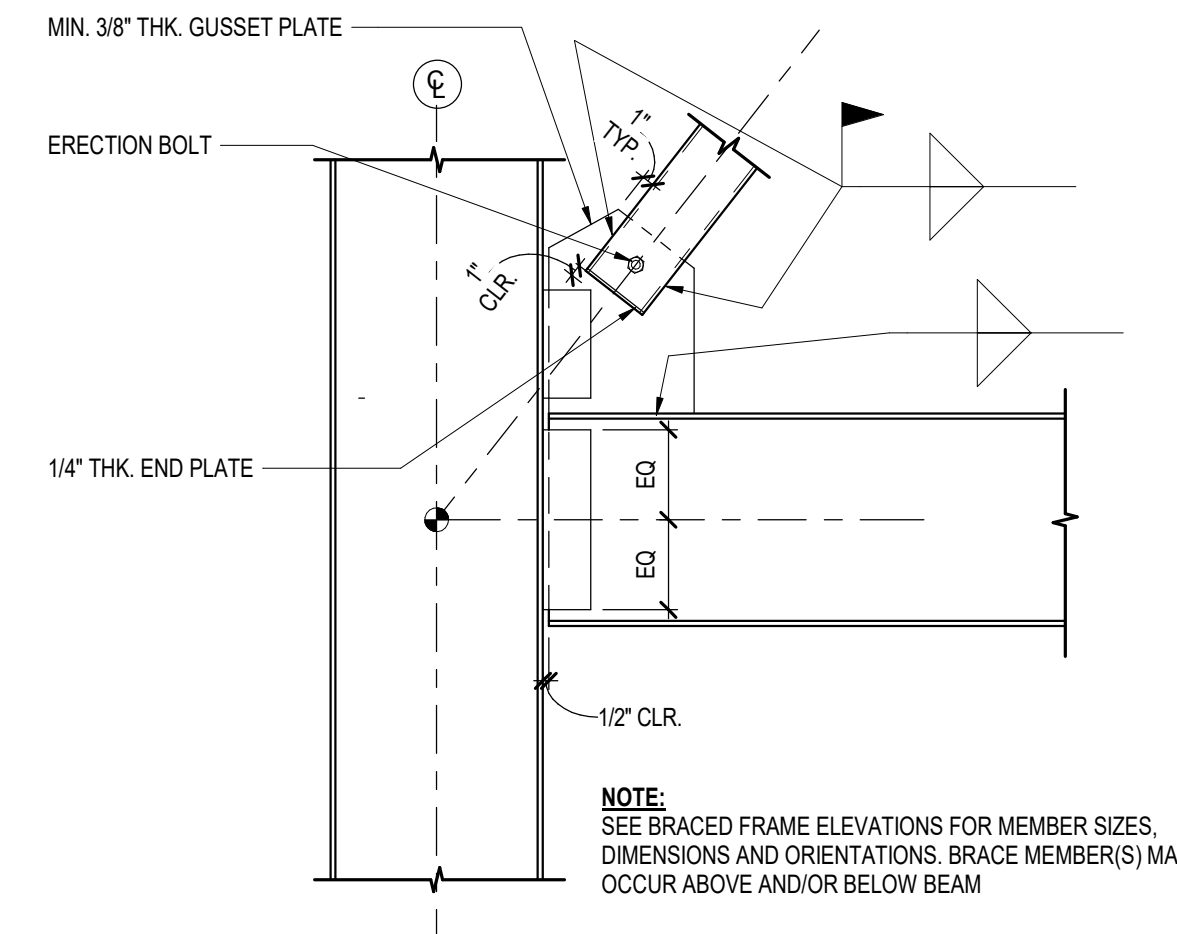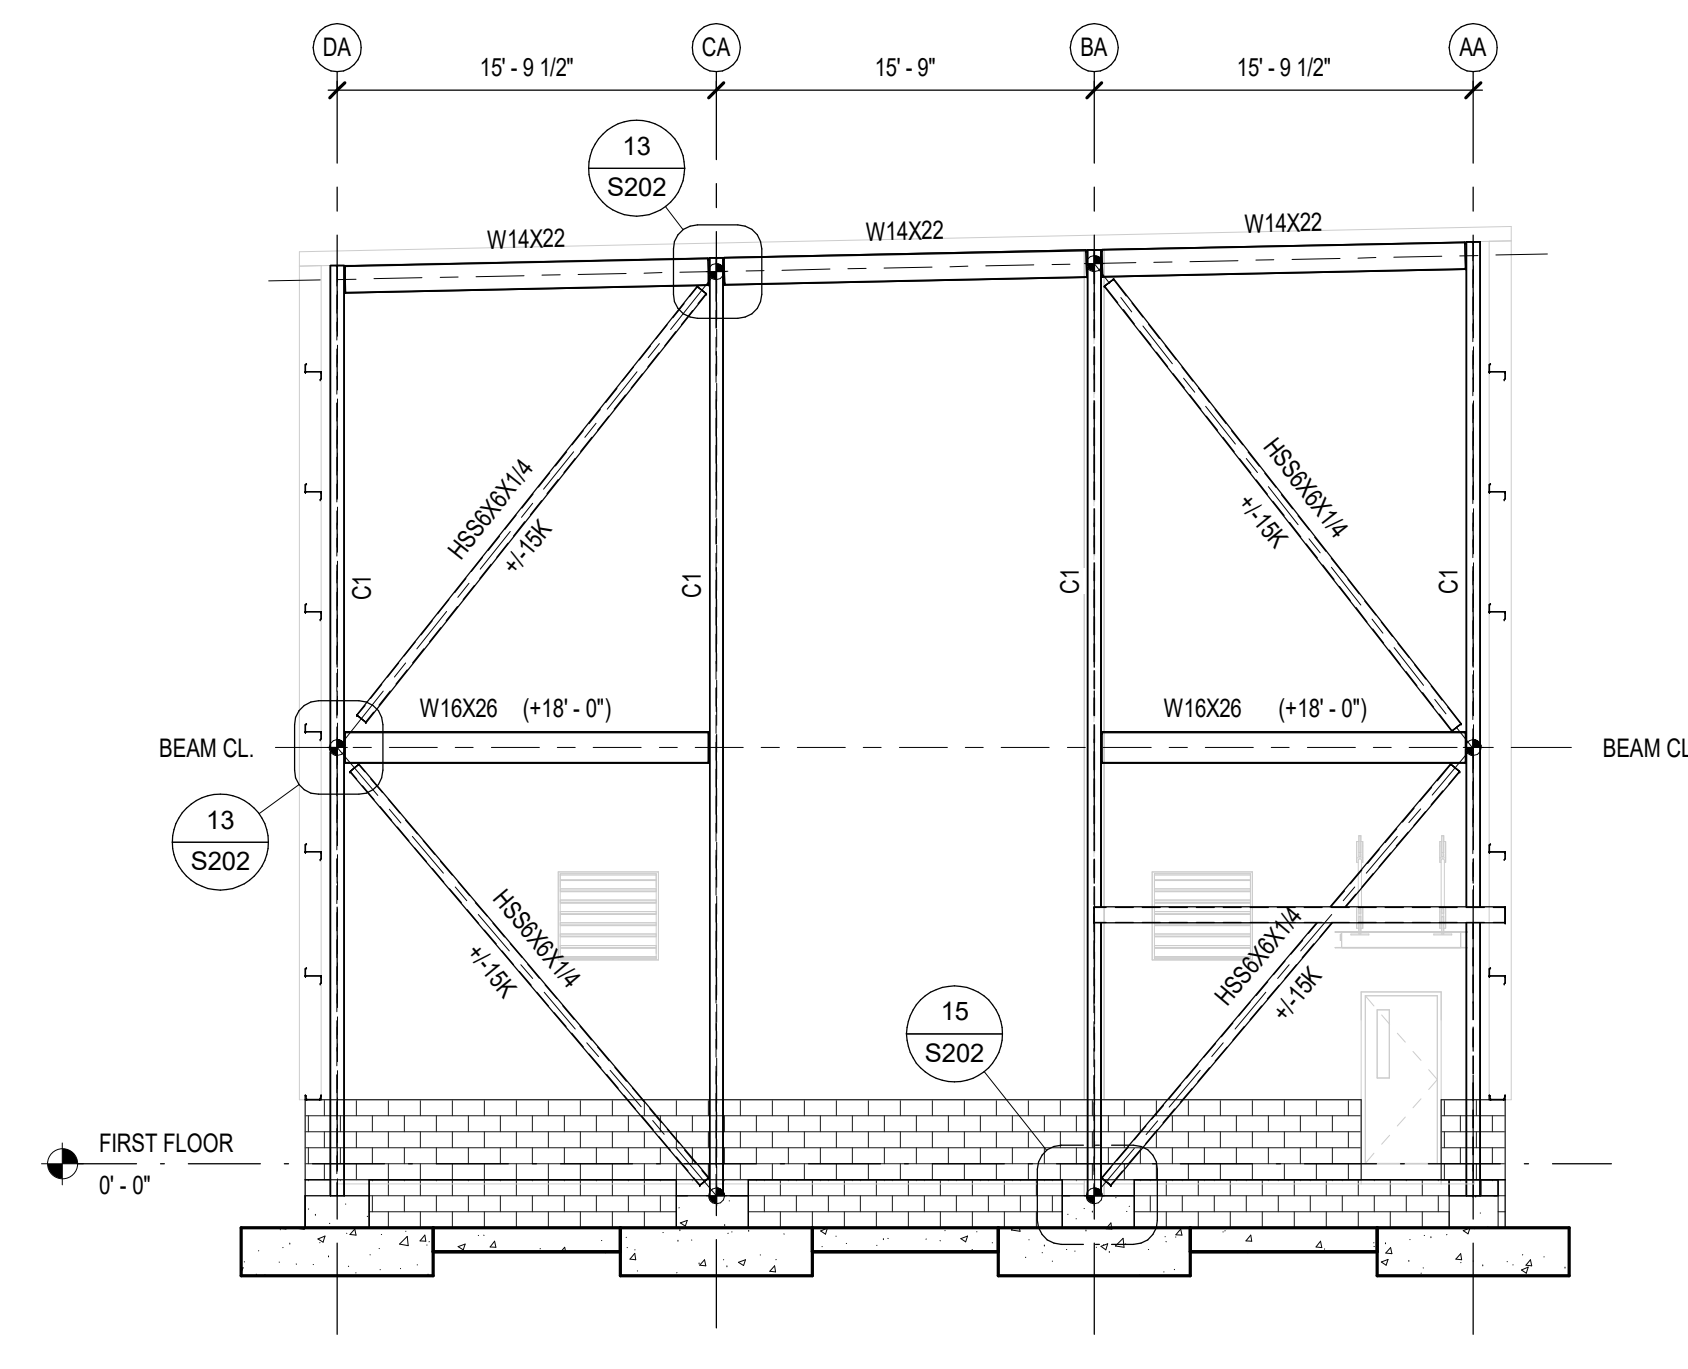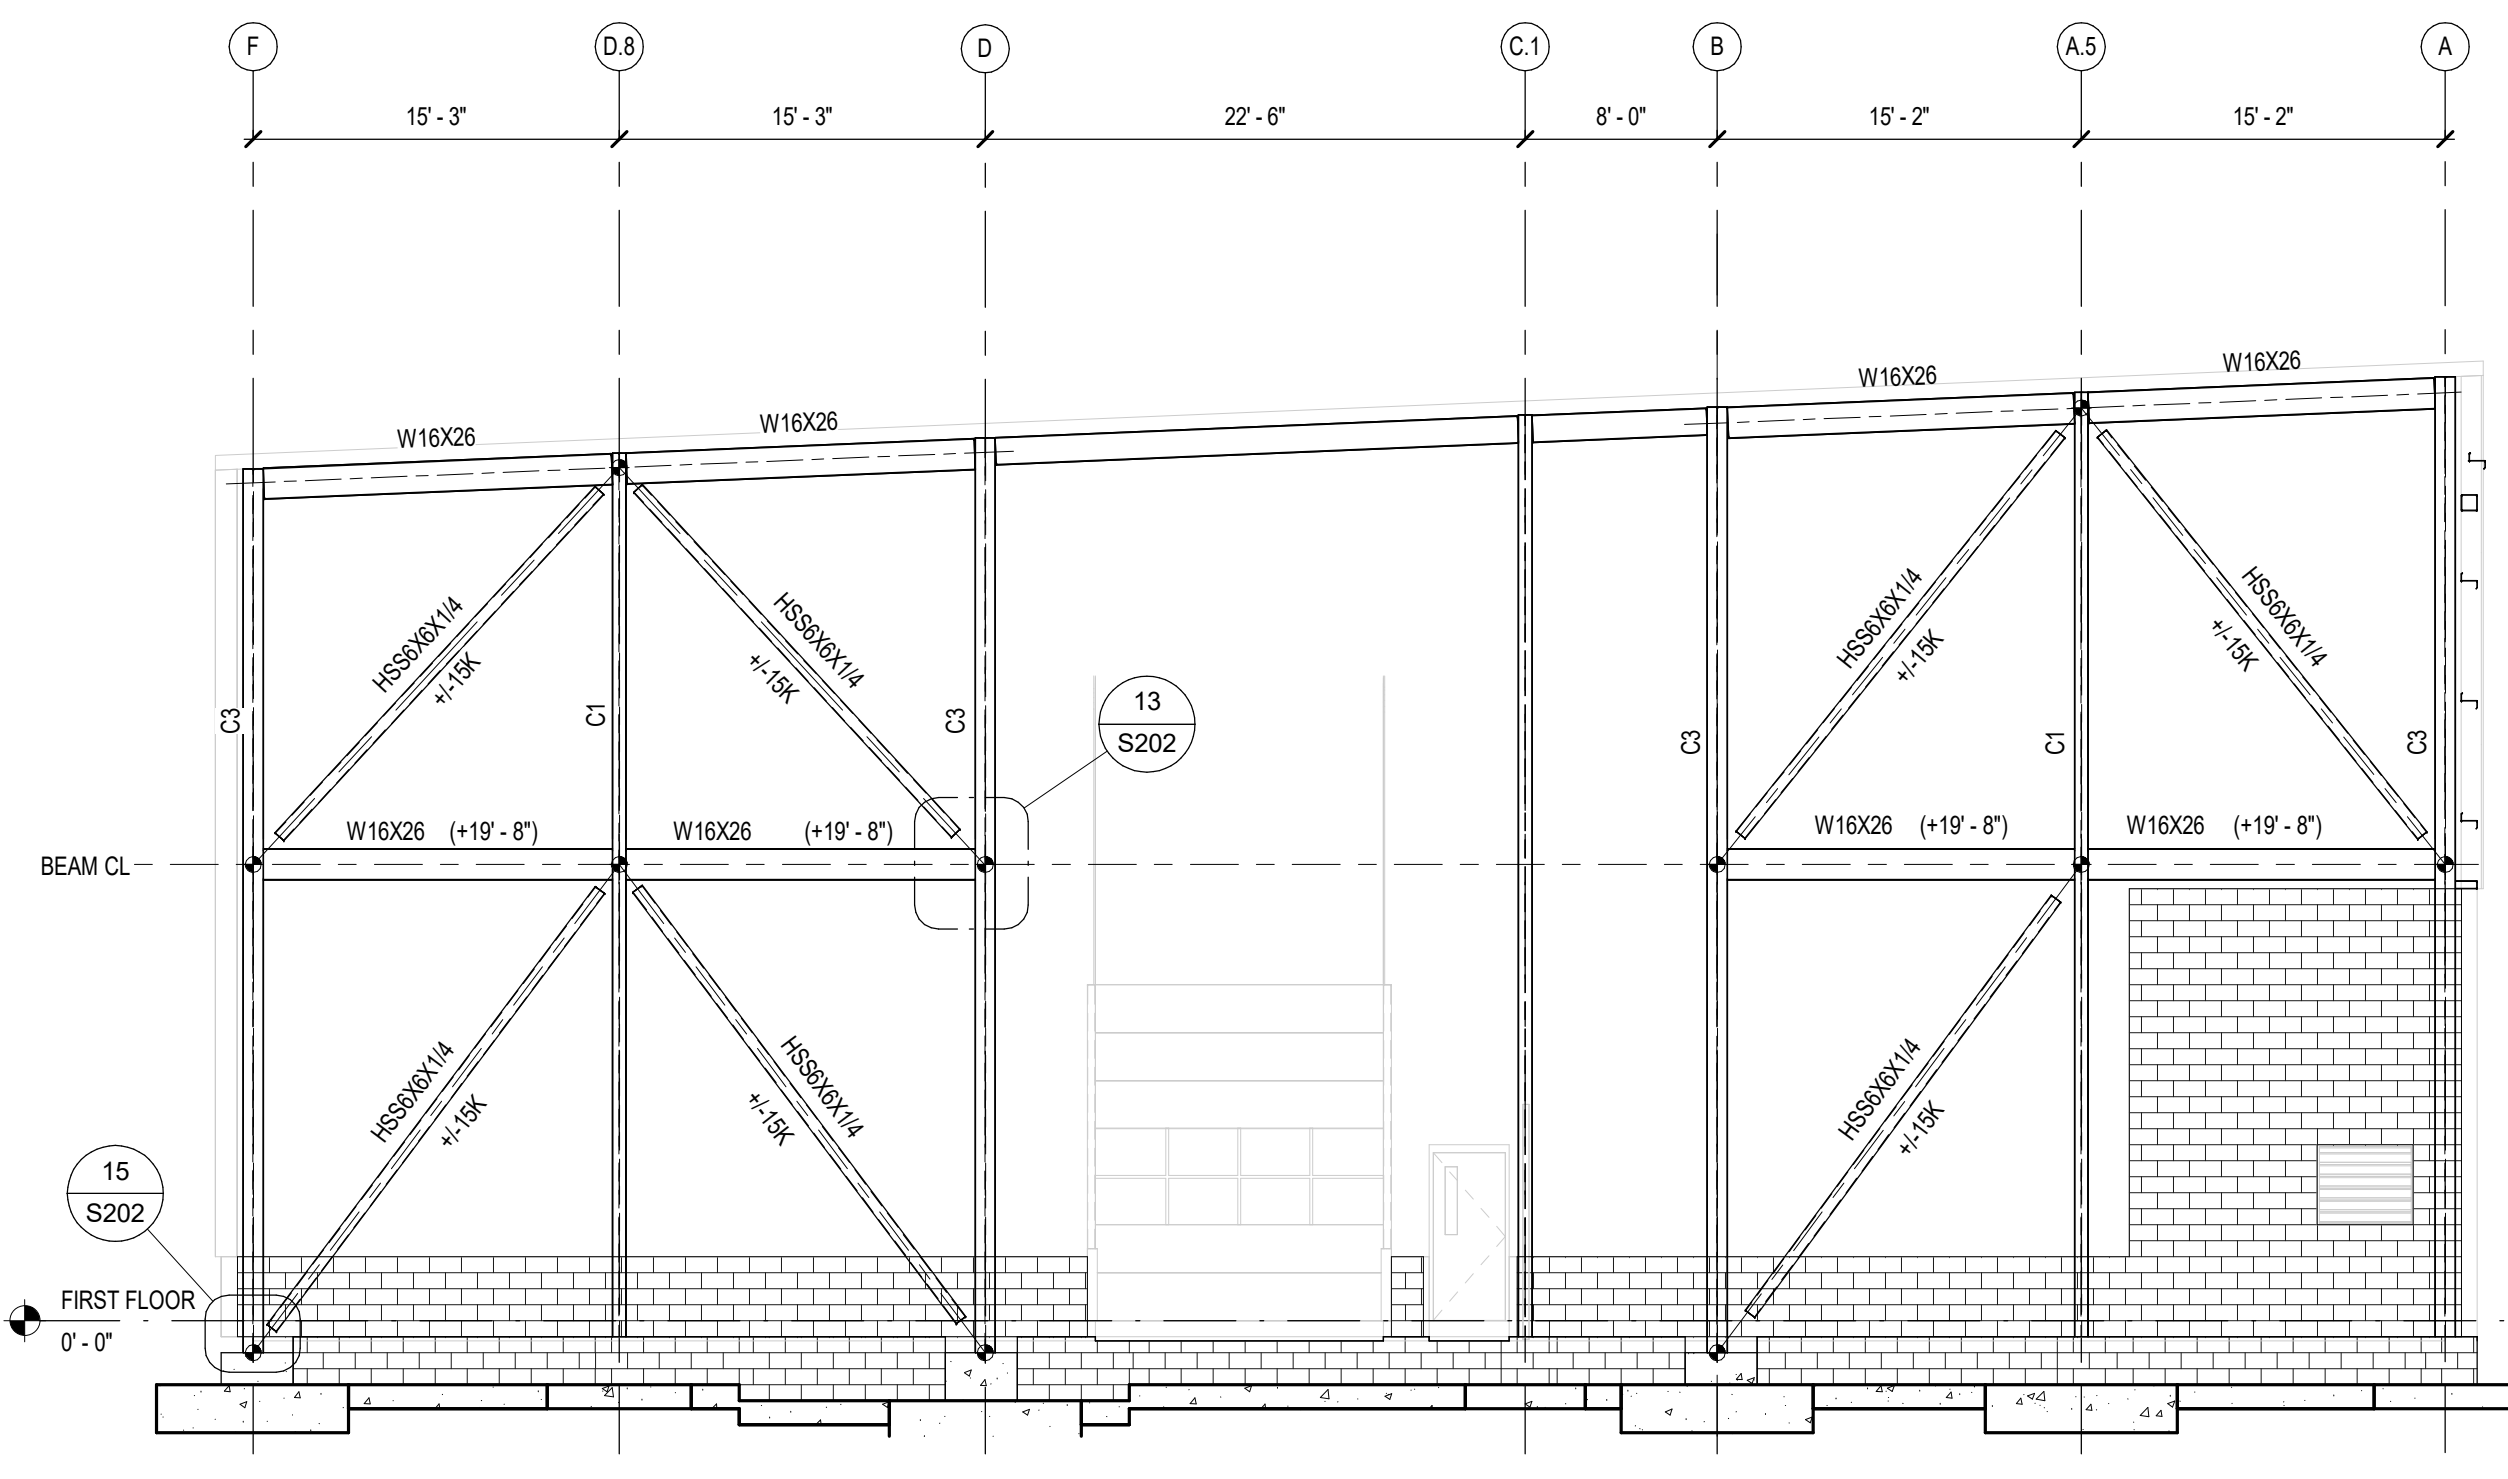


MARK	SIZE
C1	W14X38
C2	W14X43
C3	W14X61
C4	W14X90
C5	HSS6X6X1/2
C6	HSS6X6X5/8
C7	HSS12X12X5/16
C8	HSS4X4X5/16

BRACED FRAME ELEVATION NOTES:








1. DESIGN OF BRACING CONNECTIONS SHALL BE IN ACCORDANCE WITH THE UNIFORM FORCE METHOD PER AISC.
2. BRACE MEMBER AXIAL TENSION (+) AND / OR COMPRESSION (-) FORCES ARE LISTED ON THE BRACED FRAME ELEVATIONS. REFER TO THE FOUNDATION PLANS AND S303 FOR BEAM SHEAR AND AXIAL CONNECTION DESIGN LOADS.
3. ALL LOADS INDICATED ARE ALLOWABLE STRESS DESIGN (ASD) LOADS.
4. BOLTED CONNECTIONS SHALL BE DESIGNED USING SLIP CRITICAL JOINTS.
5. SLOTS IN HSS BRACE MEMBERS SHALL BE A MAXIMUM OF 1/8" WIDER THAN THE GUSSET PLATE THICKNESS (1/16" EACH SIDE OF GUSSET).

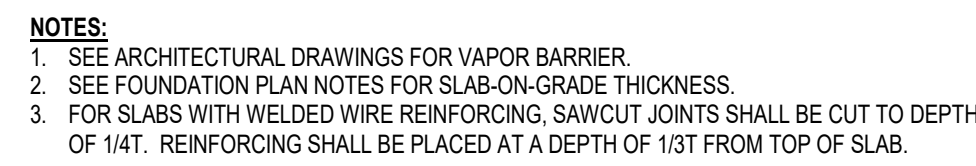

1 CONCRETE
S300 NOT TO SCALE

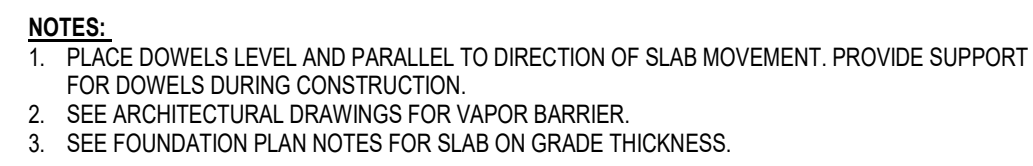

2 TYPICAL
S300 NOT TO SCALE

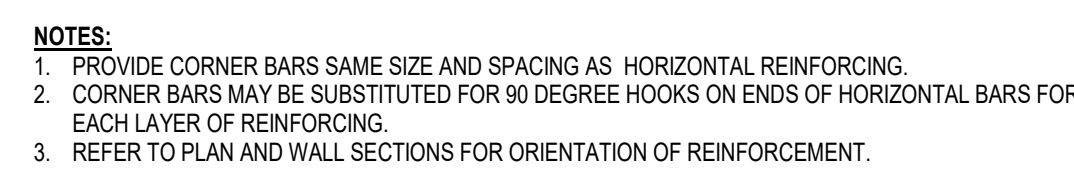


10 TYPICAL
S300 NOT TO SCALE

NOTES:

1. TOP HORIZONTAL BARS ARE DEFINED AS HORIZONTAL BARS WITH MORE THAN 12" OF CONCRETE CAST IN THE MEMBER BELOW THE REINFORCEMENT. BOTTOM HORIZONTAL BARS ARE ALL OTHER HORIZONTAL BARS.
2. FOR LIGHTWEIGHT AGGREGATE CONCRETE, MULTIPLY THE VALUES ABOVE 1.3.
3. FOR EPOXY COATED REINFORCEMENT WITH COVER LESS THAN 3db OR CLEAR SPACINGS LESS THAN 6db, MULTIPLY VALUES ABOVE BY 1.5. FOR ALL OTHER EPOXY COATED REINFORCEMENT, DIVIDE VALUES ABOVE BY 0.75.
4. ALL SPLICES ASSUMED TO BE CLASS B SPLICES.
5. WHEN SPACING BARS OF DIFFERENT SIZES USE SPICE LENGTH FOR LARGEST BAR.
6. MINIMUM HOOK LENGTHS ARE 16db FOR NO. 3-8 BARS, 17db FOR NO. 9, 10 & 11 BARS, AND 18 db FOR NO. 14 & 18 BARS.
7. SPICE LENGTHS GIVEN ARE MINIMUM, U.N.O.



11 STEPPED
S300 NOT TO SCALE



© Copyright Notice, Warehaus - All Rights Reserved.
These plans are the property of Warehaus. Any use or reproduction of these plans, in whole or in part, without the written permission of Warehaus is forbidden.

drawing set

ISSUED FOR BIDDING

date	12/23/2025
project no.	24-0106
project mgr.	DAD
drawn by.	JAL

[illegible]

CLEVELAND BROTHERS - LETTERKENNY

585 Development Avenue, Chambersburg, PA 17201
GREENE & LETTERKENNY TOWNSHIP, FRANKLIN COUNTY

drawing title


Drawing title

TYPICAL SLAB AND FOUNDATION DETAILS


sheet no

S300


2 HSS COLUMN BASE DETAIL
S301 NOT TO SCALE

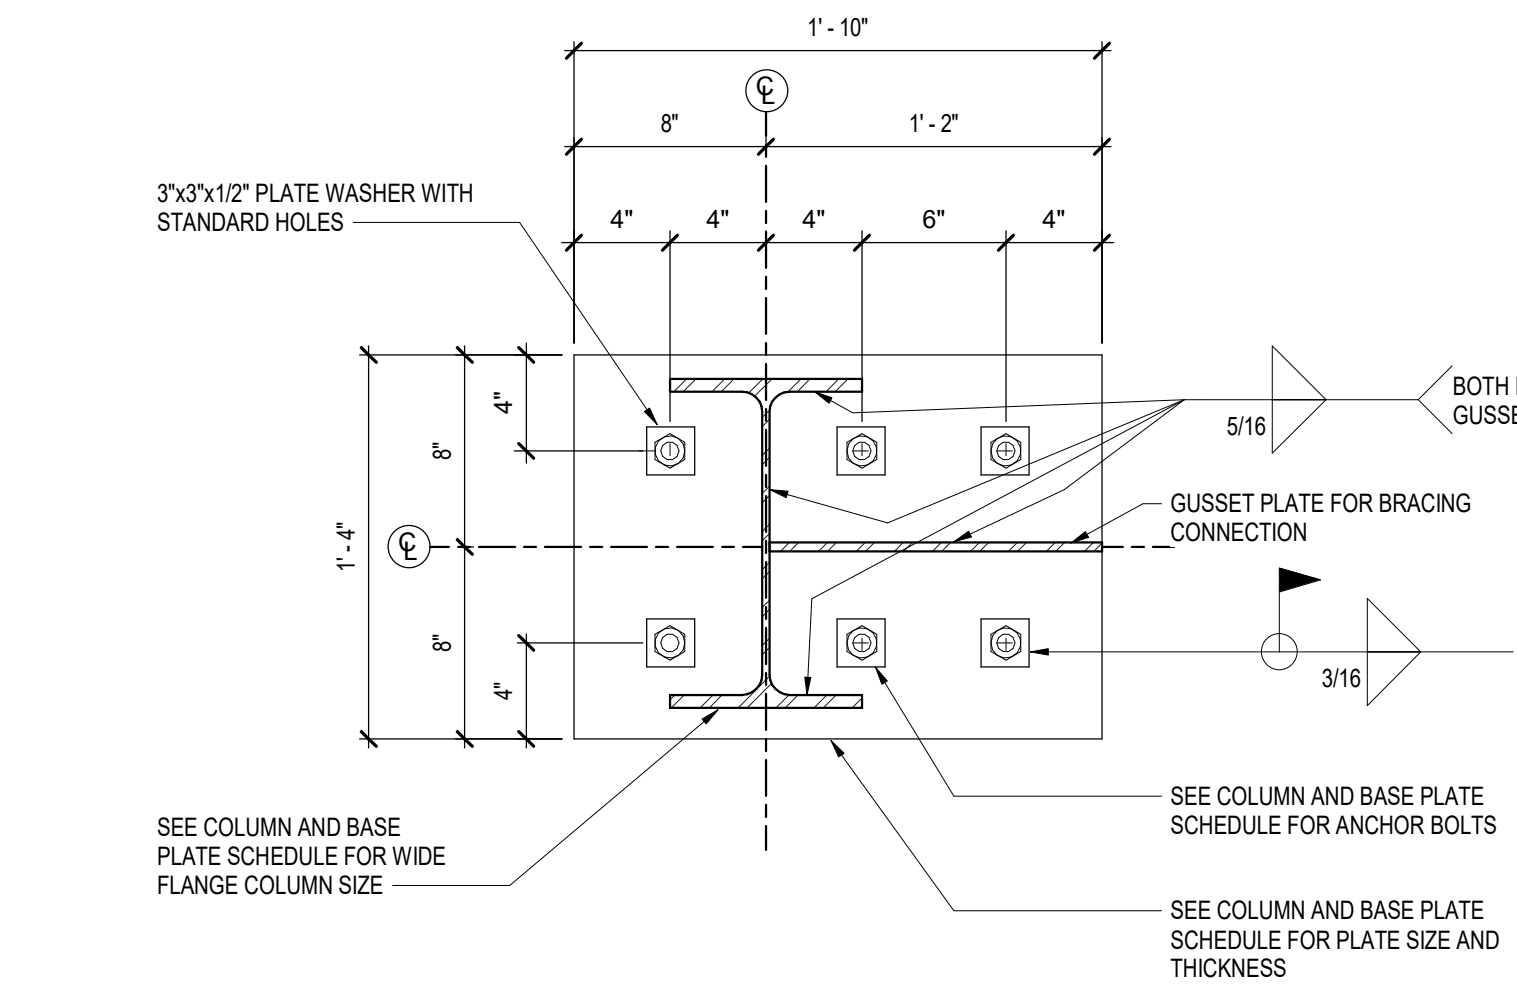


6 'BP5' COLUMN BASE PLATE DETAIL
S301 SCALE: NOT TO SCALE

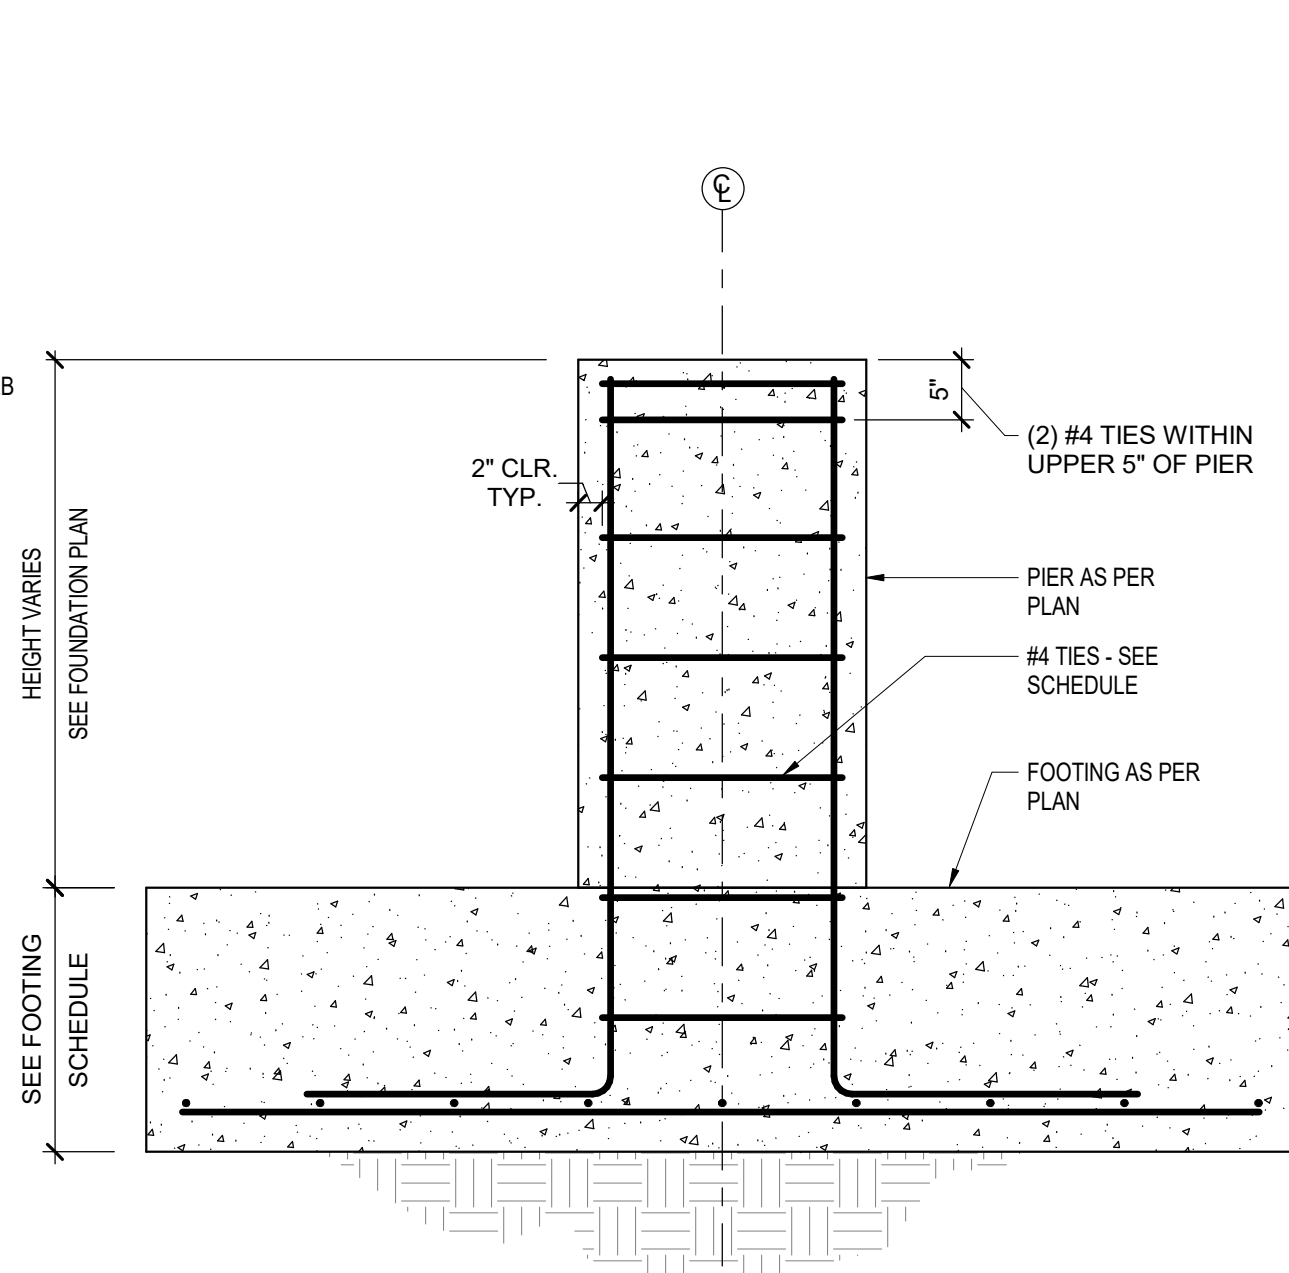


7 COLUMN PIER ELEVATION
S301 NOT TO SCALE

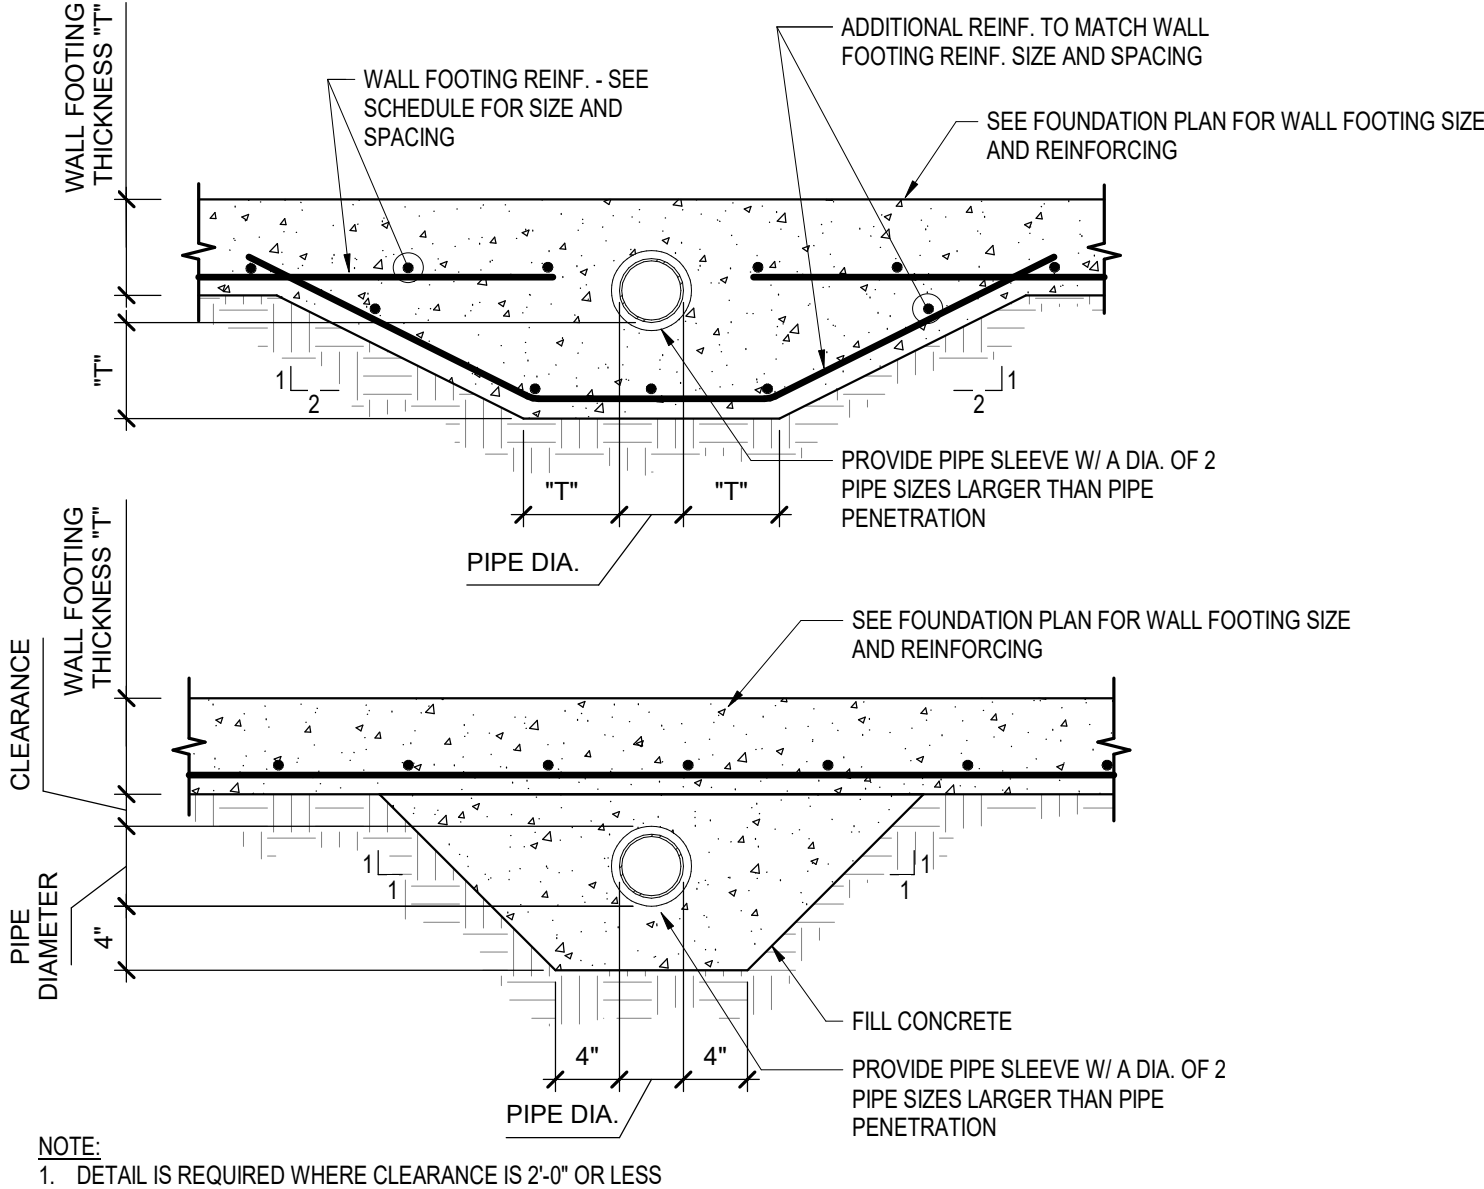


10 PIPE PENETRATION DETAILS
S301 NOT TO SCALE

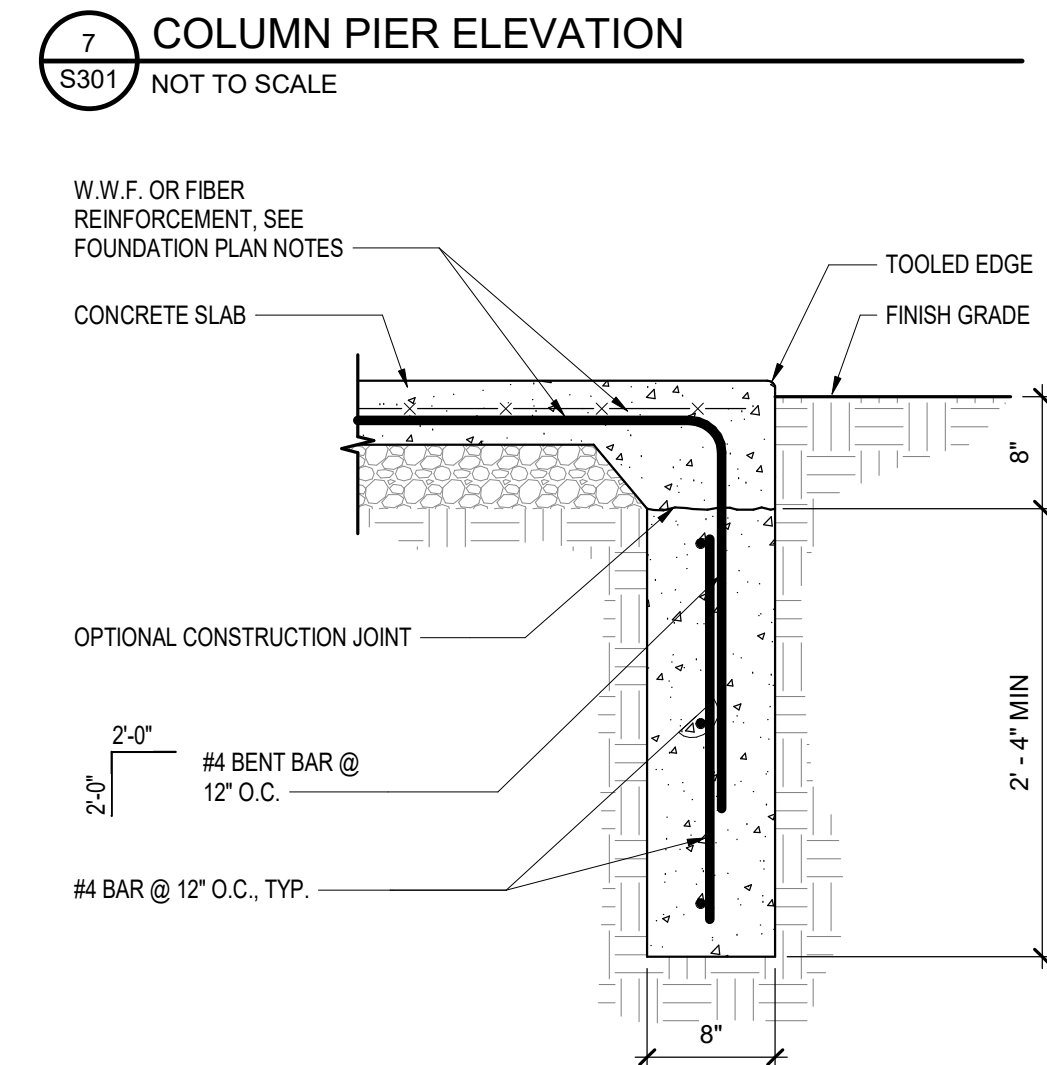


11 SLAB TURNDOWN DETAIL
S301 NOT TO SCALE

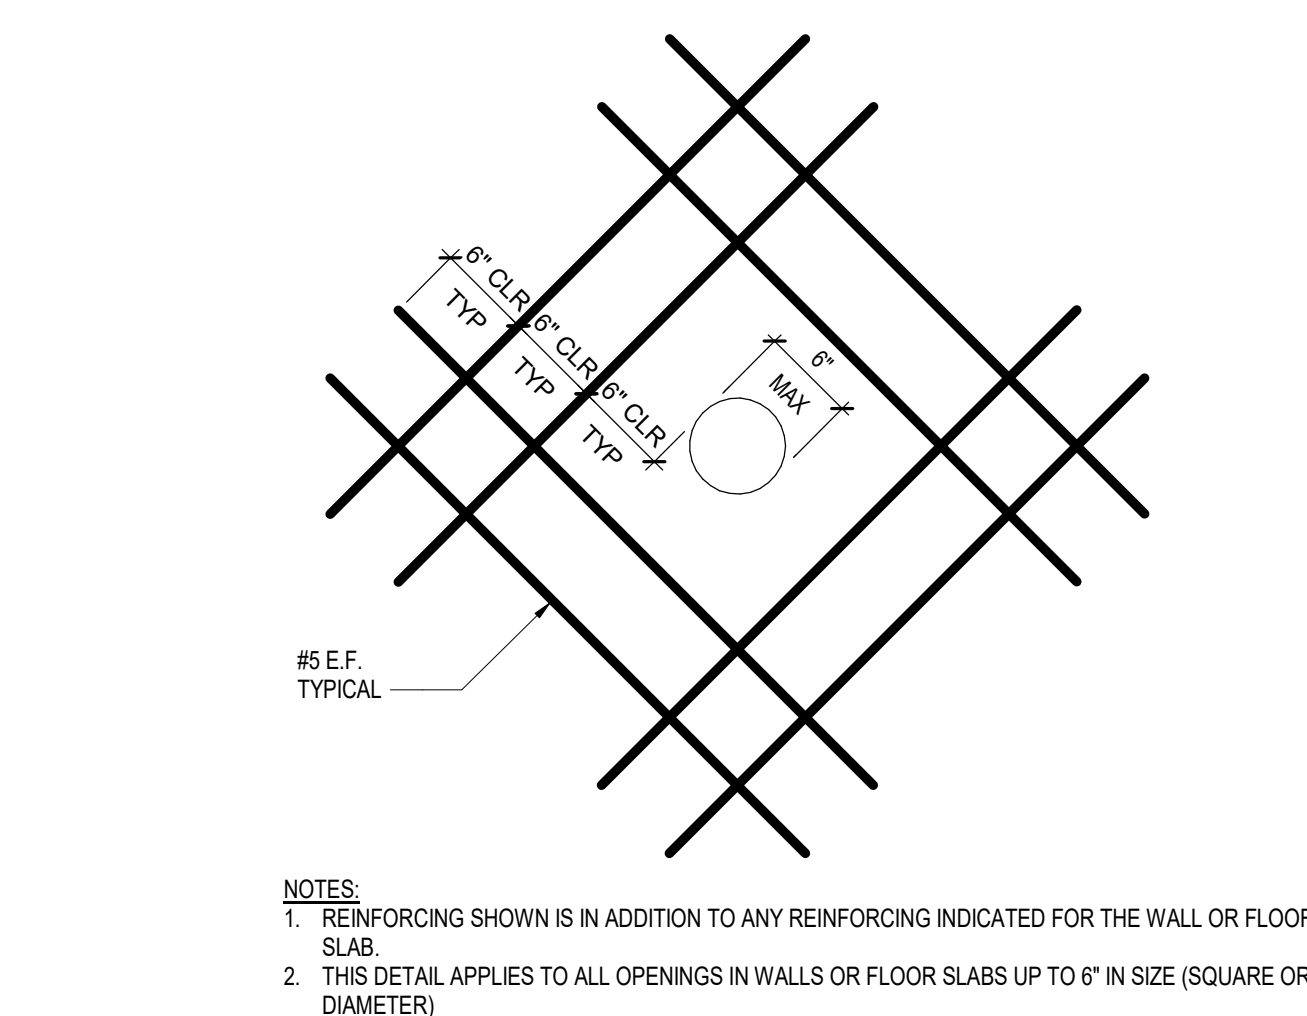


14 CONCRETE FLOOR SLAB/WALL PIPE PENETRATION REINFORCING DETAIL
S301 NOT TO SCALE

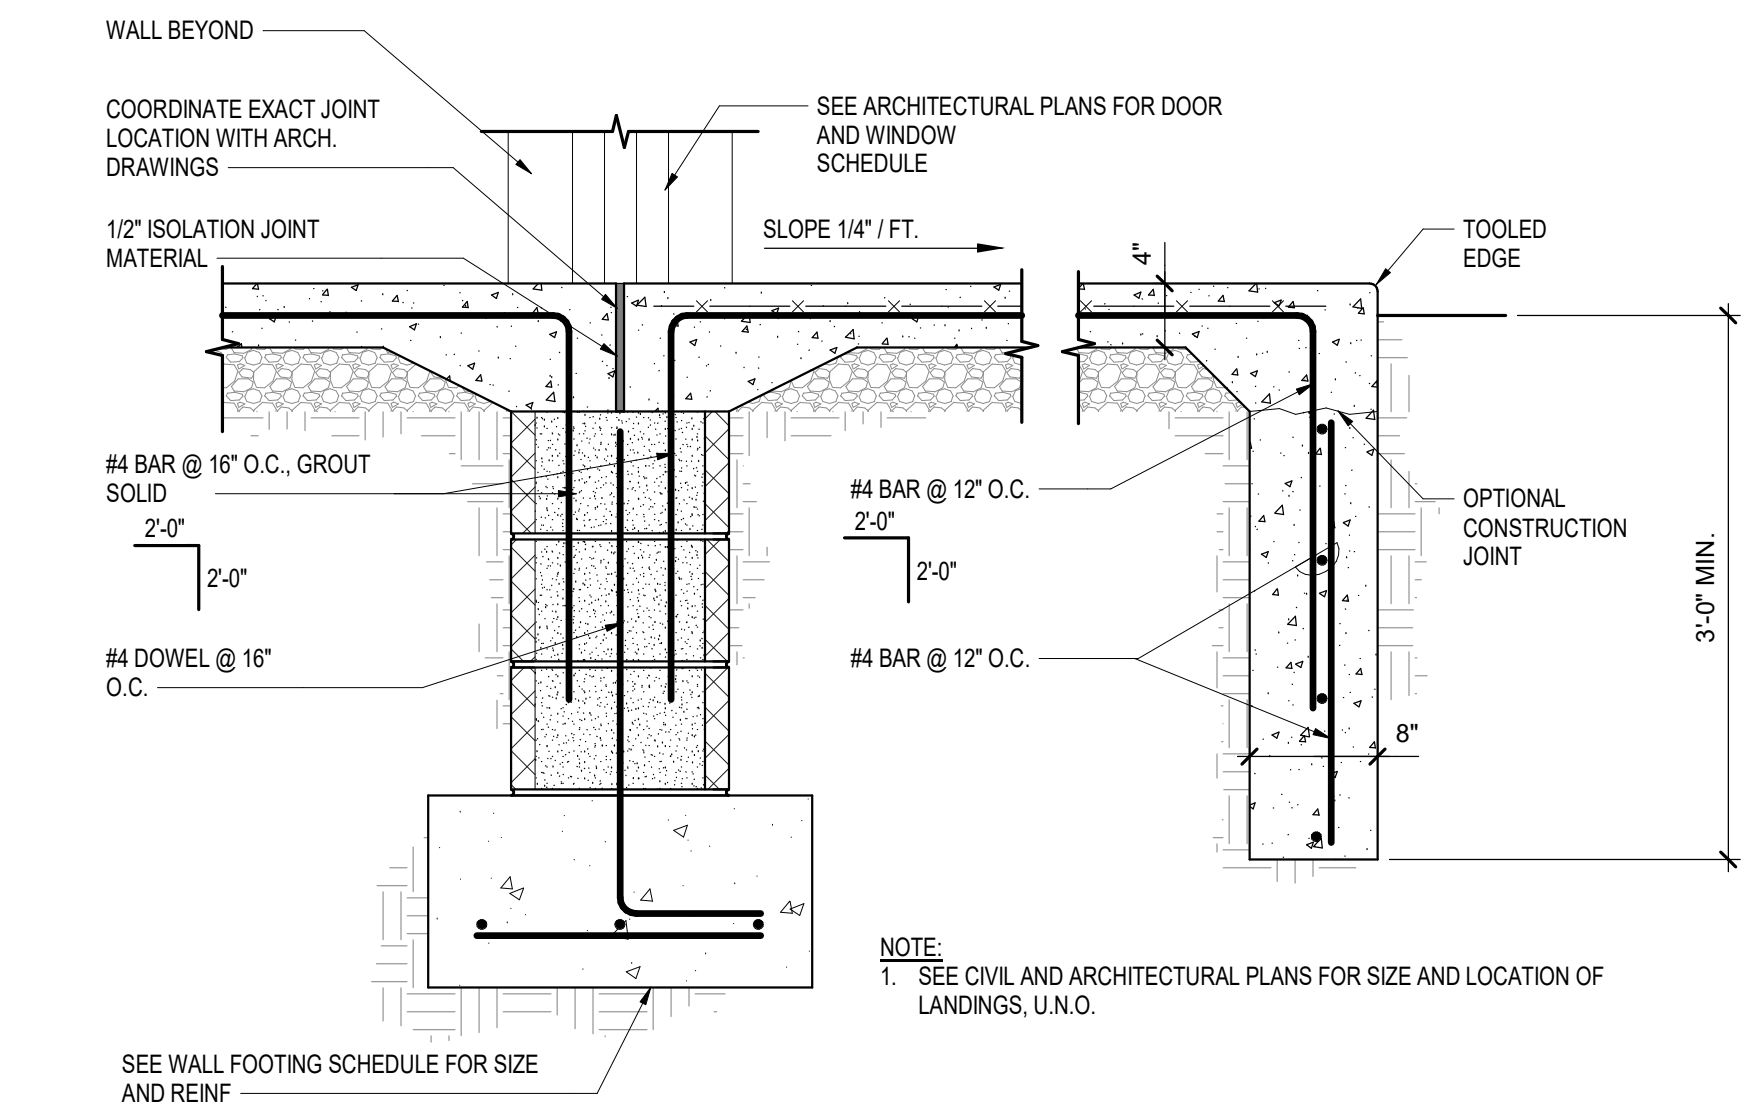


15 TYPICAL SECTION AT EXTERIOR DOOR LANDINGS
S301 NOT TO SCALE

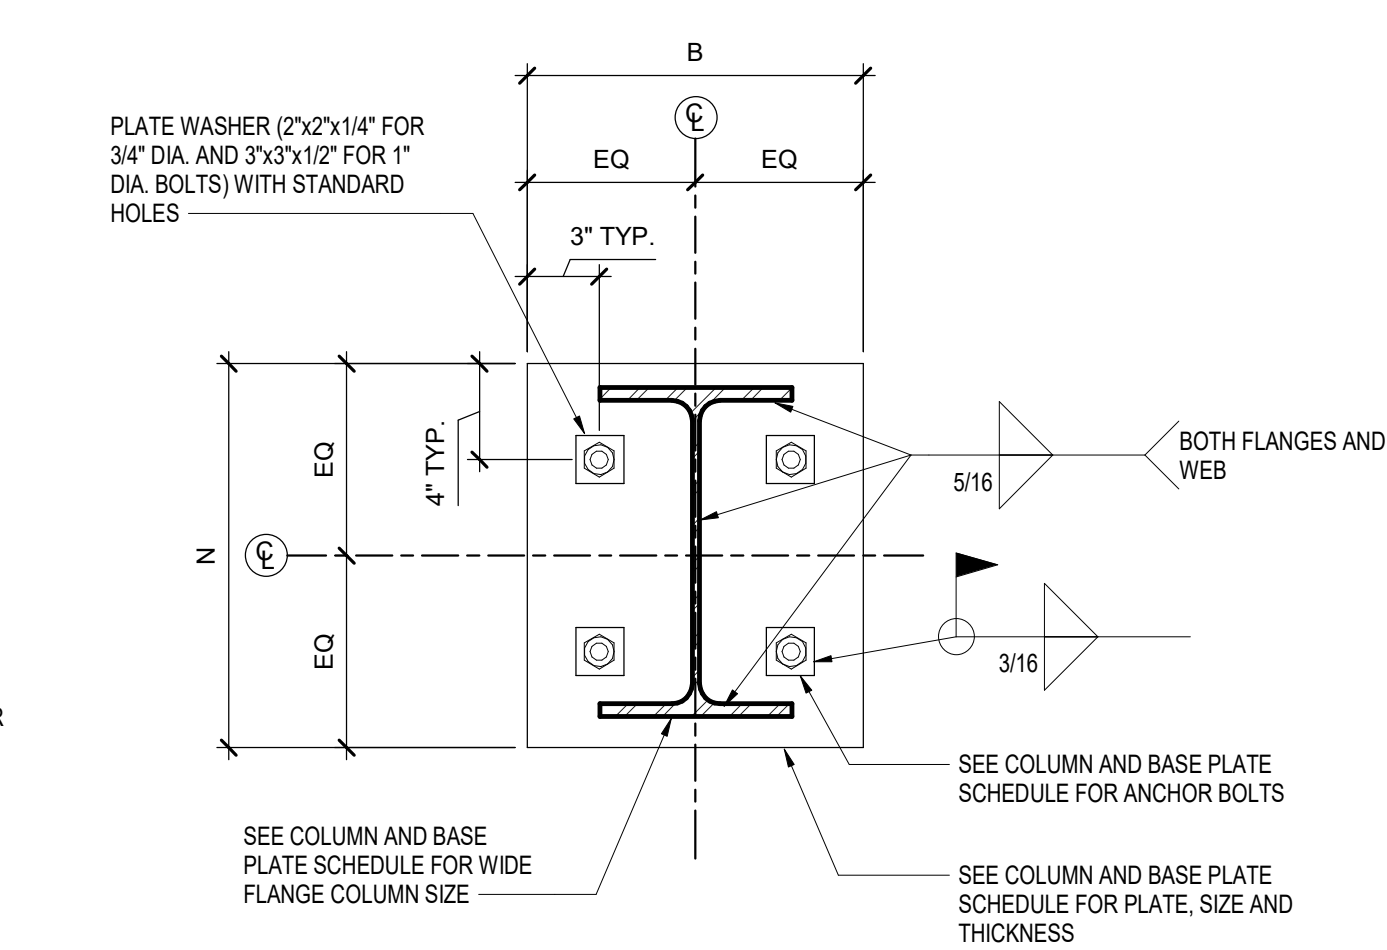


3 'BP4' COLUMN BASE PLATE DETAIL
S301 SCALE: NOT TO SCALE

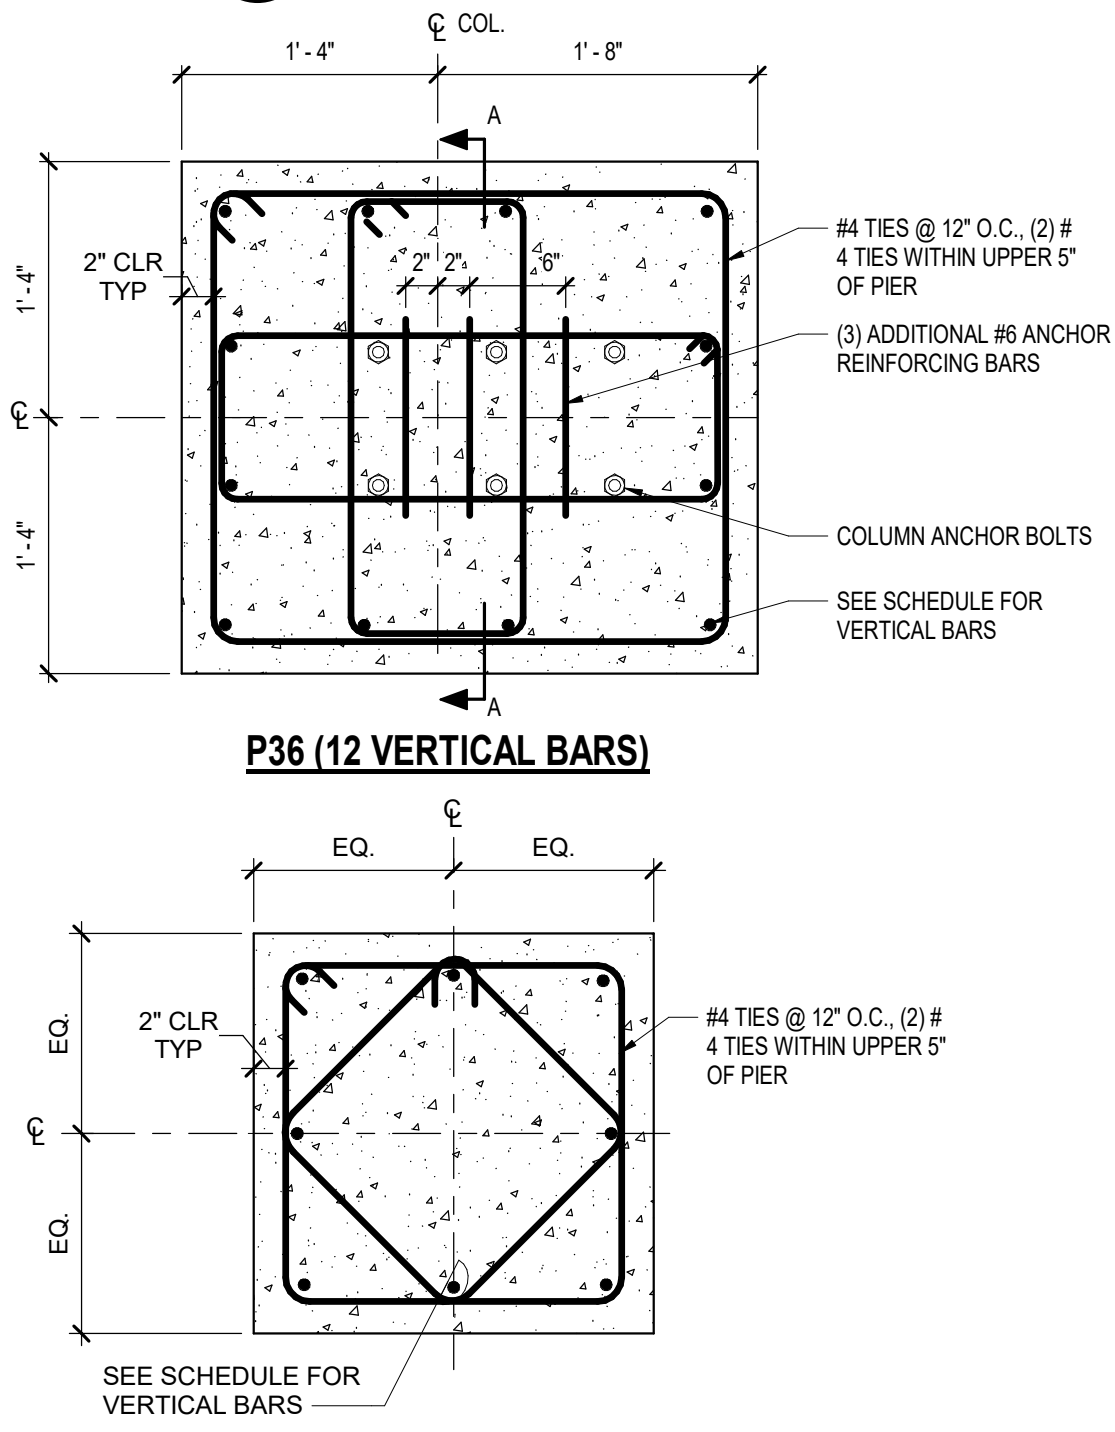


P24 (8 VERTICAL BARS)
 8 COLUMN PIER DETAILS
 S301 NOT TO SCALE

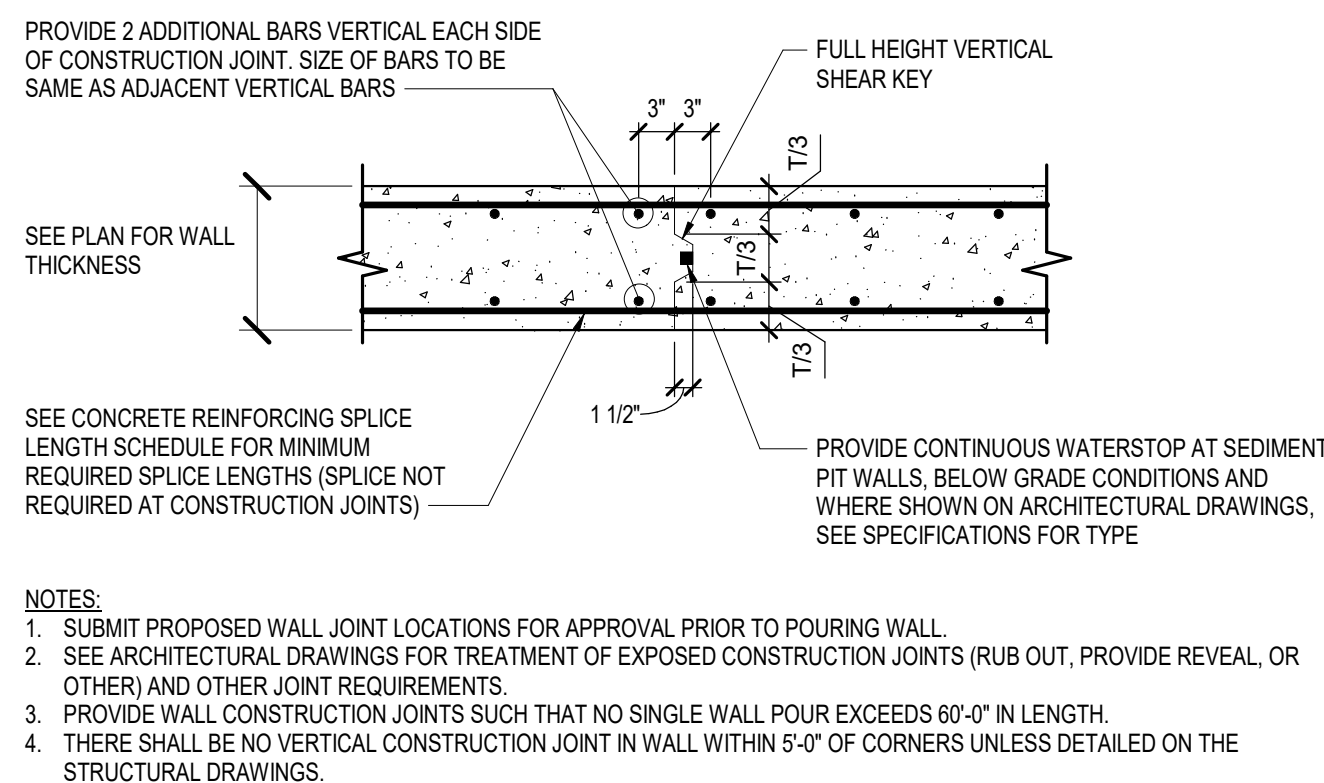


12 CONCRETE WALL CONSTRUCTION JOINT DETAIL
S301 NOT TO SCALE

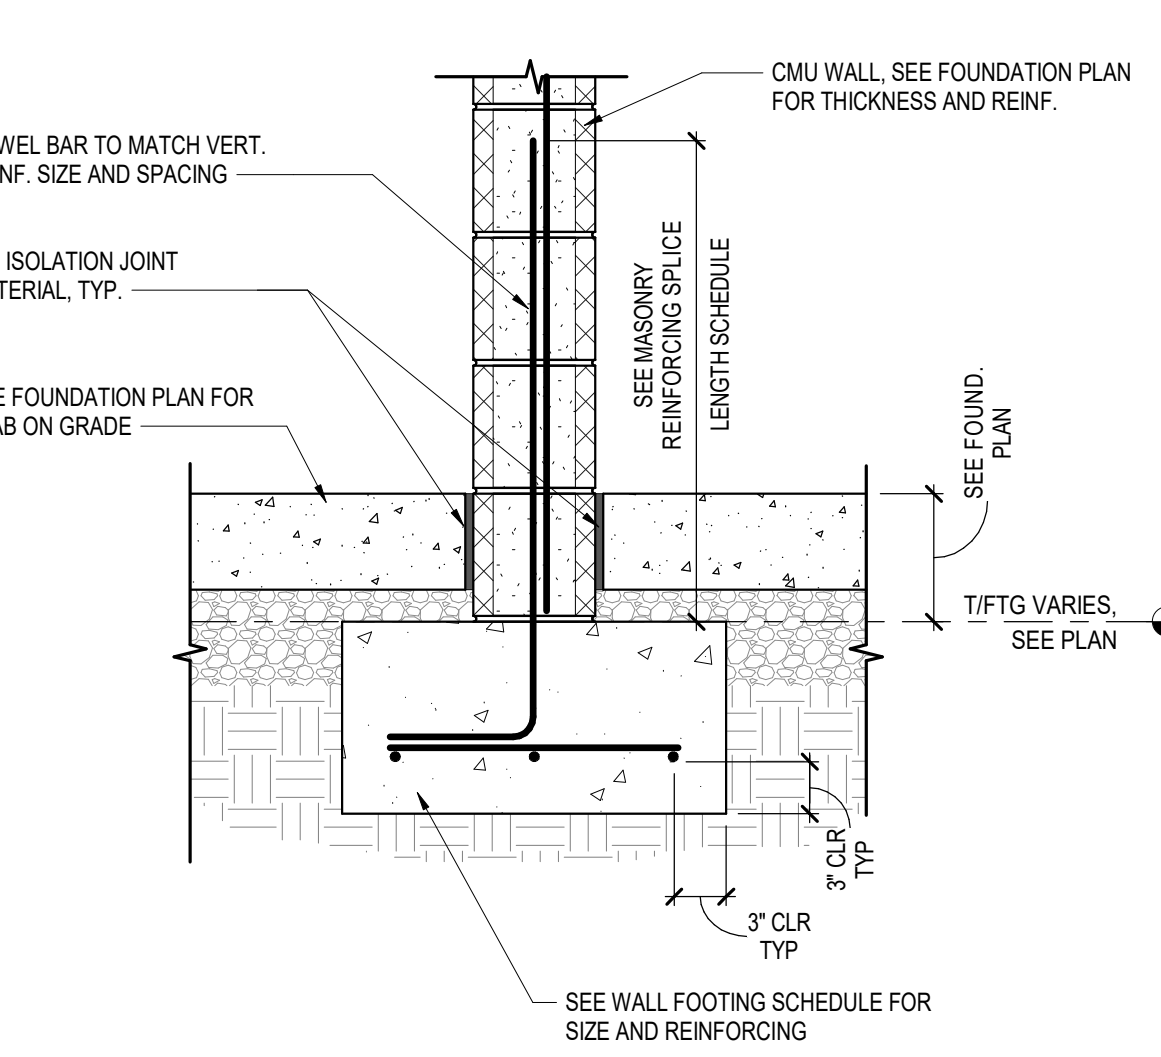


16 TYPICAL INTERIOR WALL FOOTING SECTION
S301 NOT TO SCALE

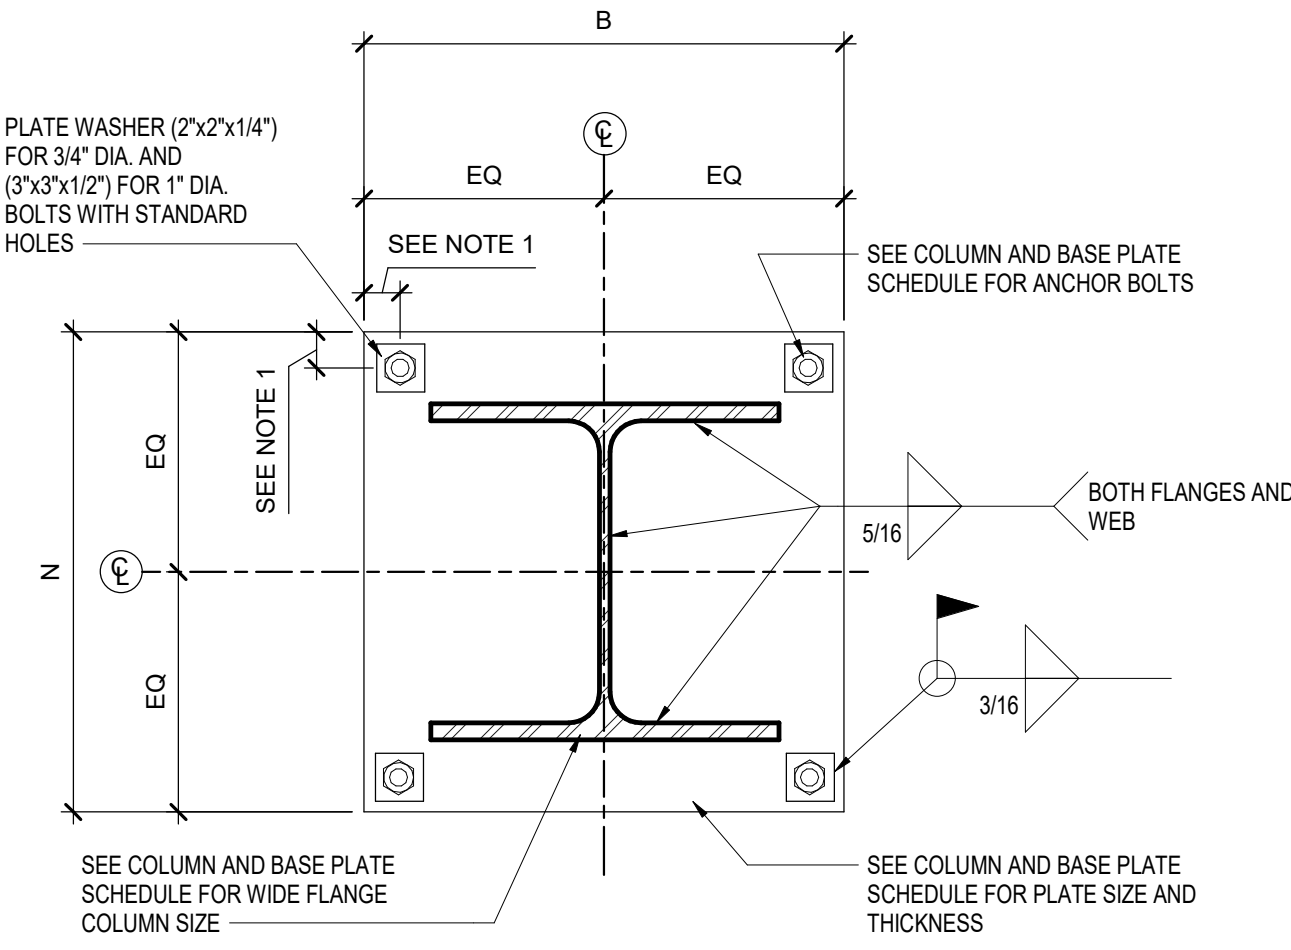


4 'BP1' COLUMN BASE PLATE DETAIL
S301 SCALE: NOT TO SCALE

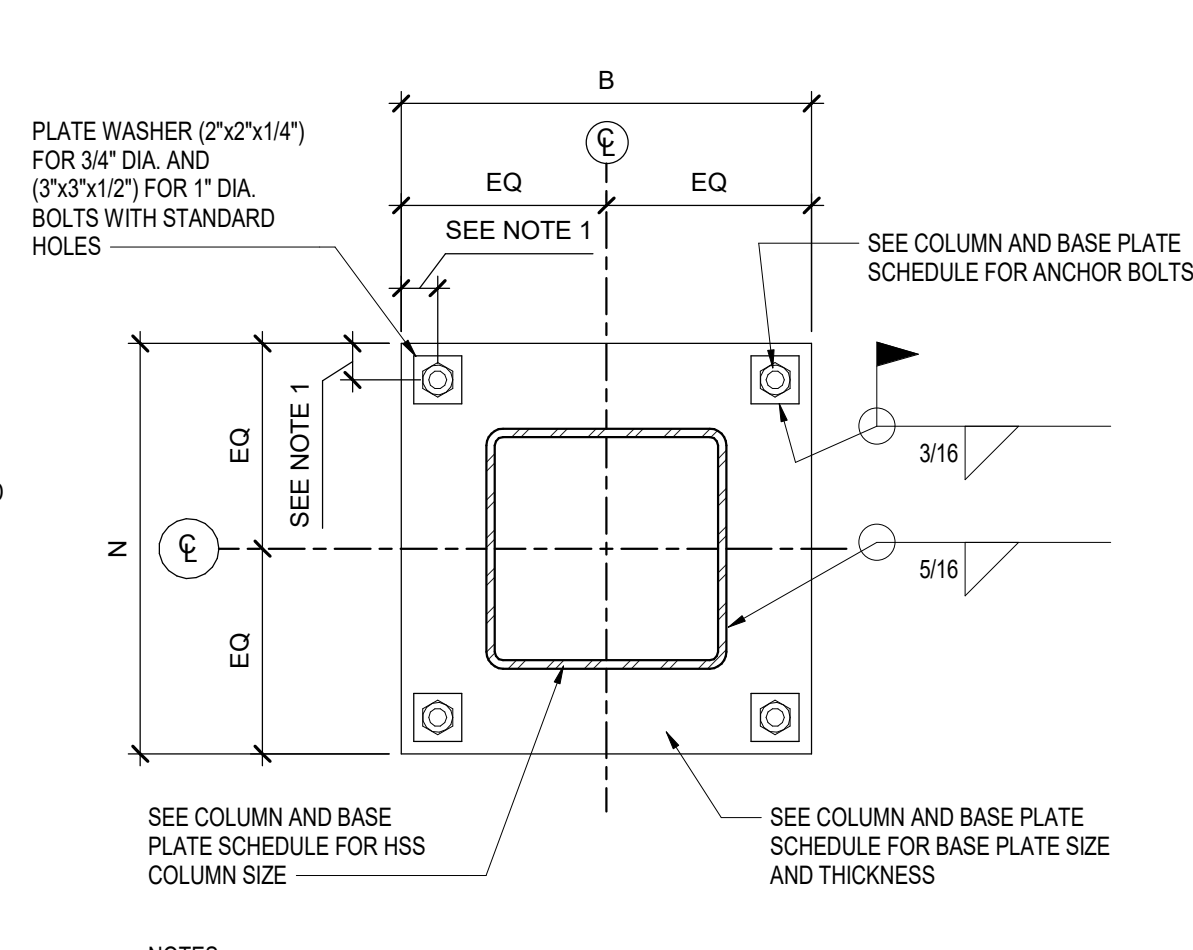


5 'BP2' AND 'BP3' COLUMN BASE PLATE DETAIL
S301 SCALE: NOT TO SCALE

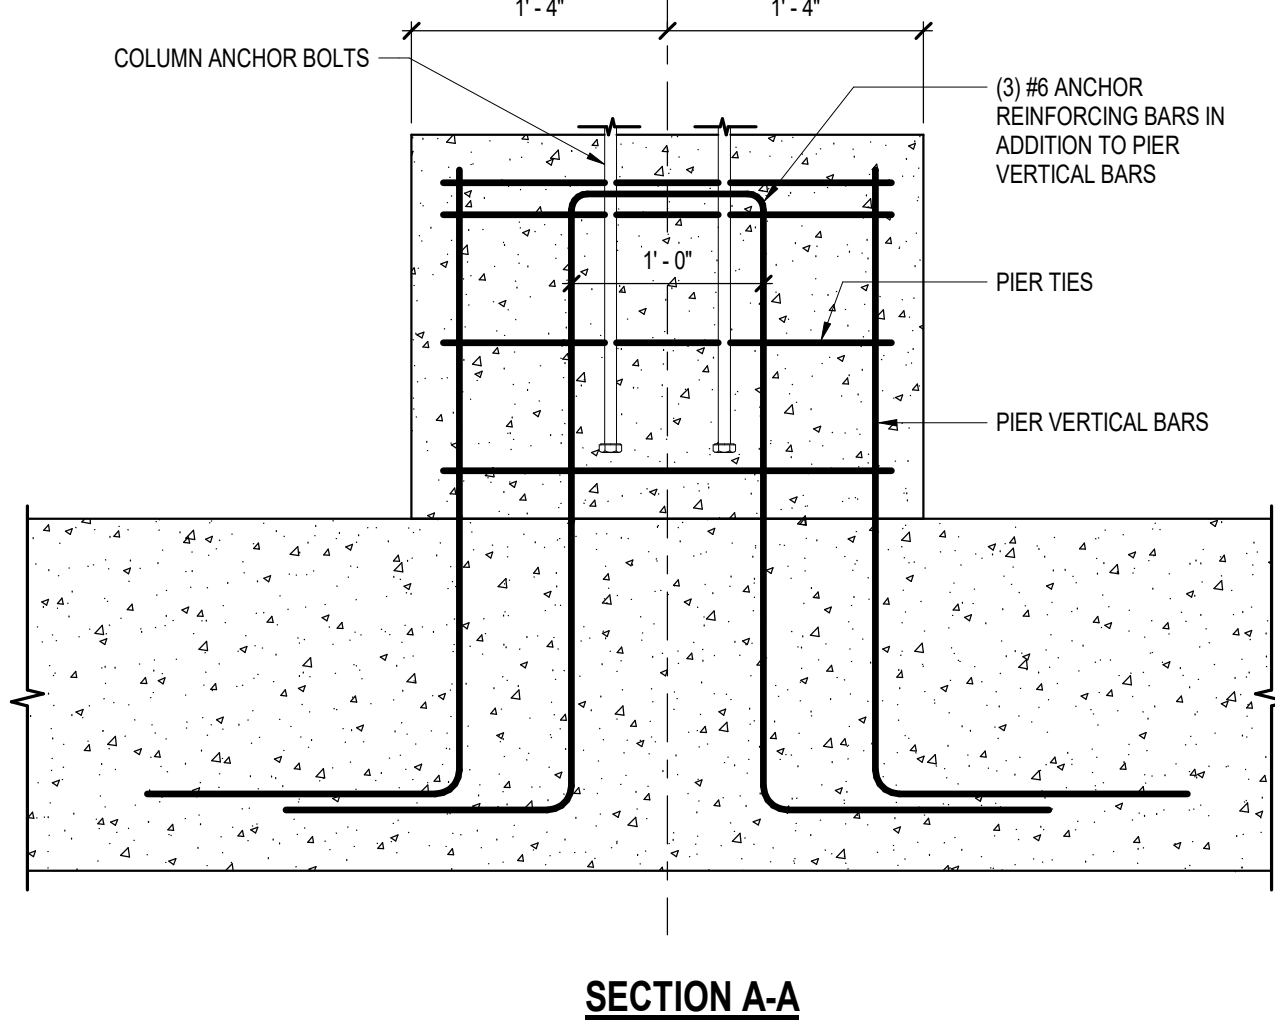


SECTION A-A

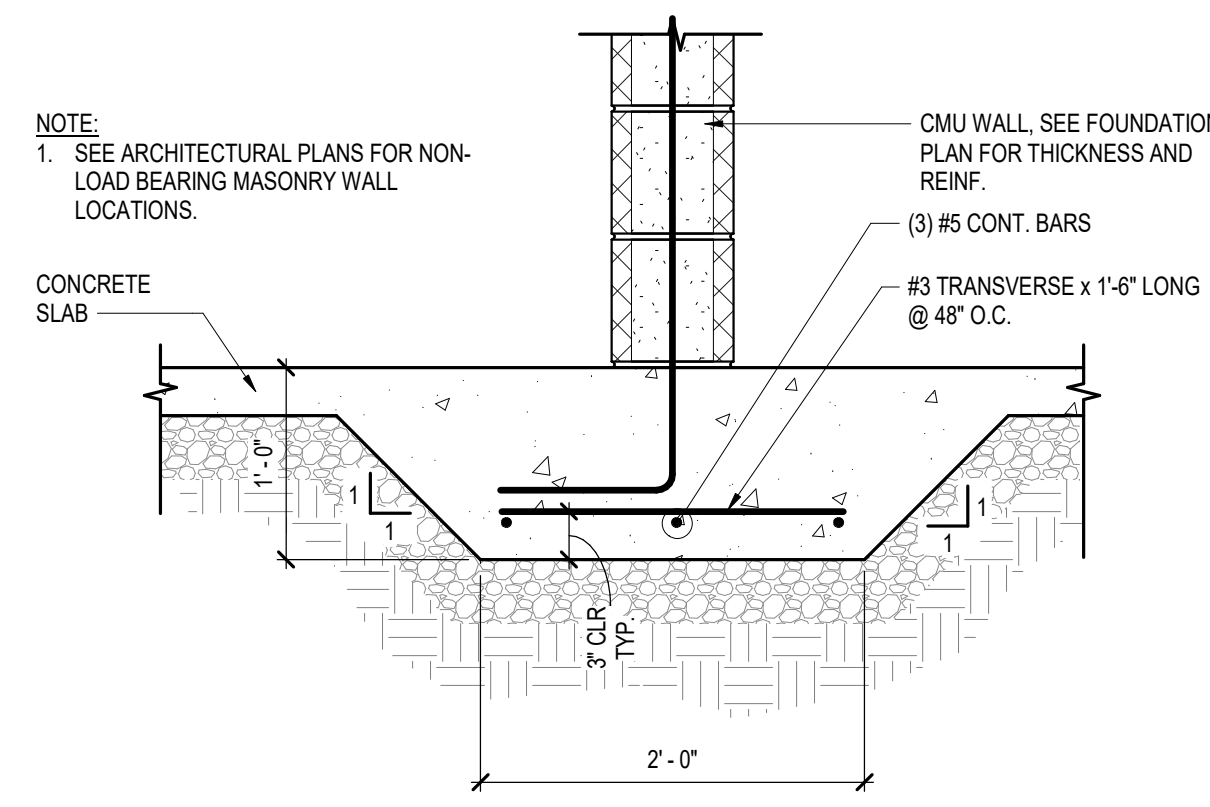

9 THICKENED SLAB AT NON-LOAD BEARING INTERIOR MASONRY WALL
S301 NOT TO SCALE

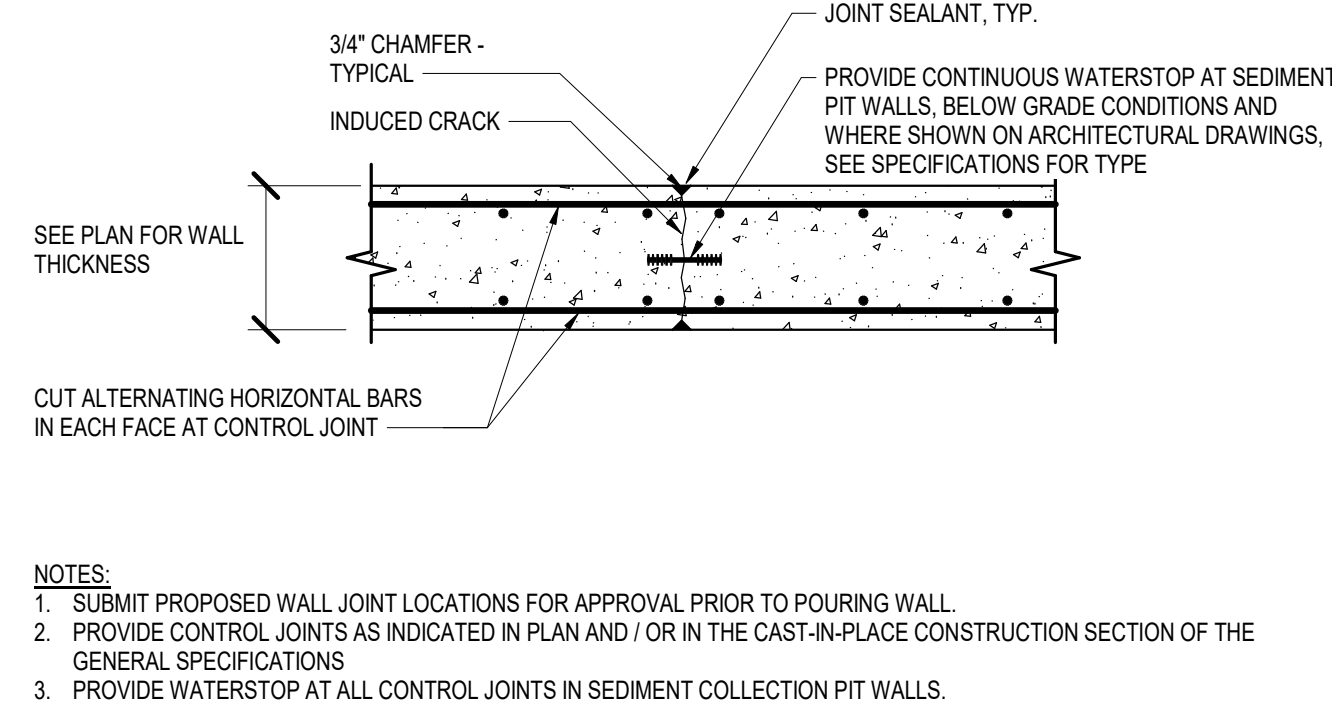

13 CONCRETE WALL CONTROL JOINT DETAIL
S301 SCALE: NOT TO SCALE

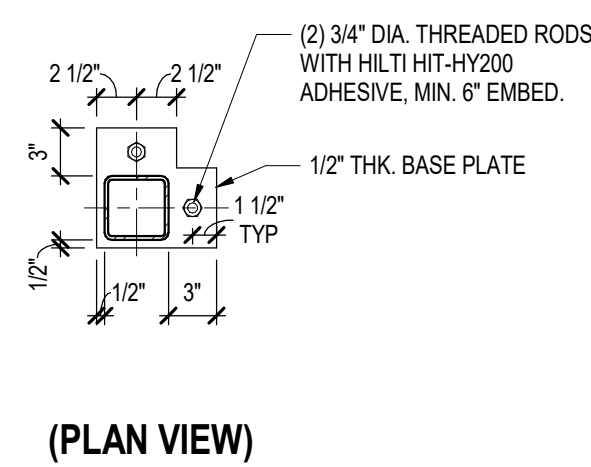

17 'BP6' COLUMN BASE PLATE DETAIL
S301 SCALE: 1" = 1'-0"

1 TYPICAL Z-GIRT CONNECTION DETAILS
S304 SCALE: 3/4" = 1'-0"

4 TYPICAL LOUVER FRAMING DETAIL
NOT TO SCALE

3
S304

TYPICAL CHANNEL GIRT TO COLUMN CONNE

SCALE: 3/4" = 1'-0"

4 TYPICAL CHANNEL GIRT TO JAMB CONNEC
S304 SCALE: 3/4" = 1'-0"

5 TYPICAL COLUMN FLANGE BRACE TO GIRT
 SCALE: 1" = 1'-0"

6 TYPICAL SAG ROD DETAILS
 SCALE: 1 1/2" = 1'-0"

7
S304

COMBINED HSS & CHANNEL JAMB MEMBER
CONNECTION AT TOP

SCALE: 1" = 1'-0"

COMBINED HSS & CHANNEL JAMB MEMBER
CONNECTION AT TOP

8
S304


SCALE: 1" = 1'-0"

9
S304


HSS16X4 BASE CONNECTION

SCALE: $3/4" = 1'-0"$


10 HSS4X4 / HSS6X4 / HSS8X4 BASE CONNECTION
S304 SCALE: 3/4" = 1'-0"

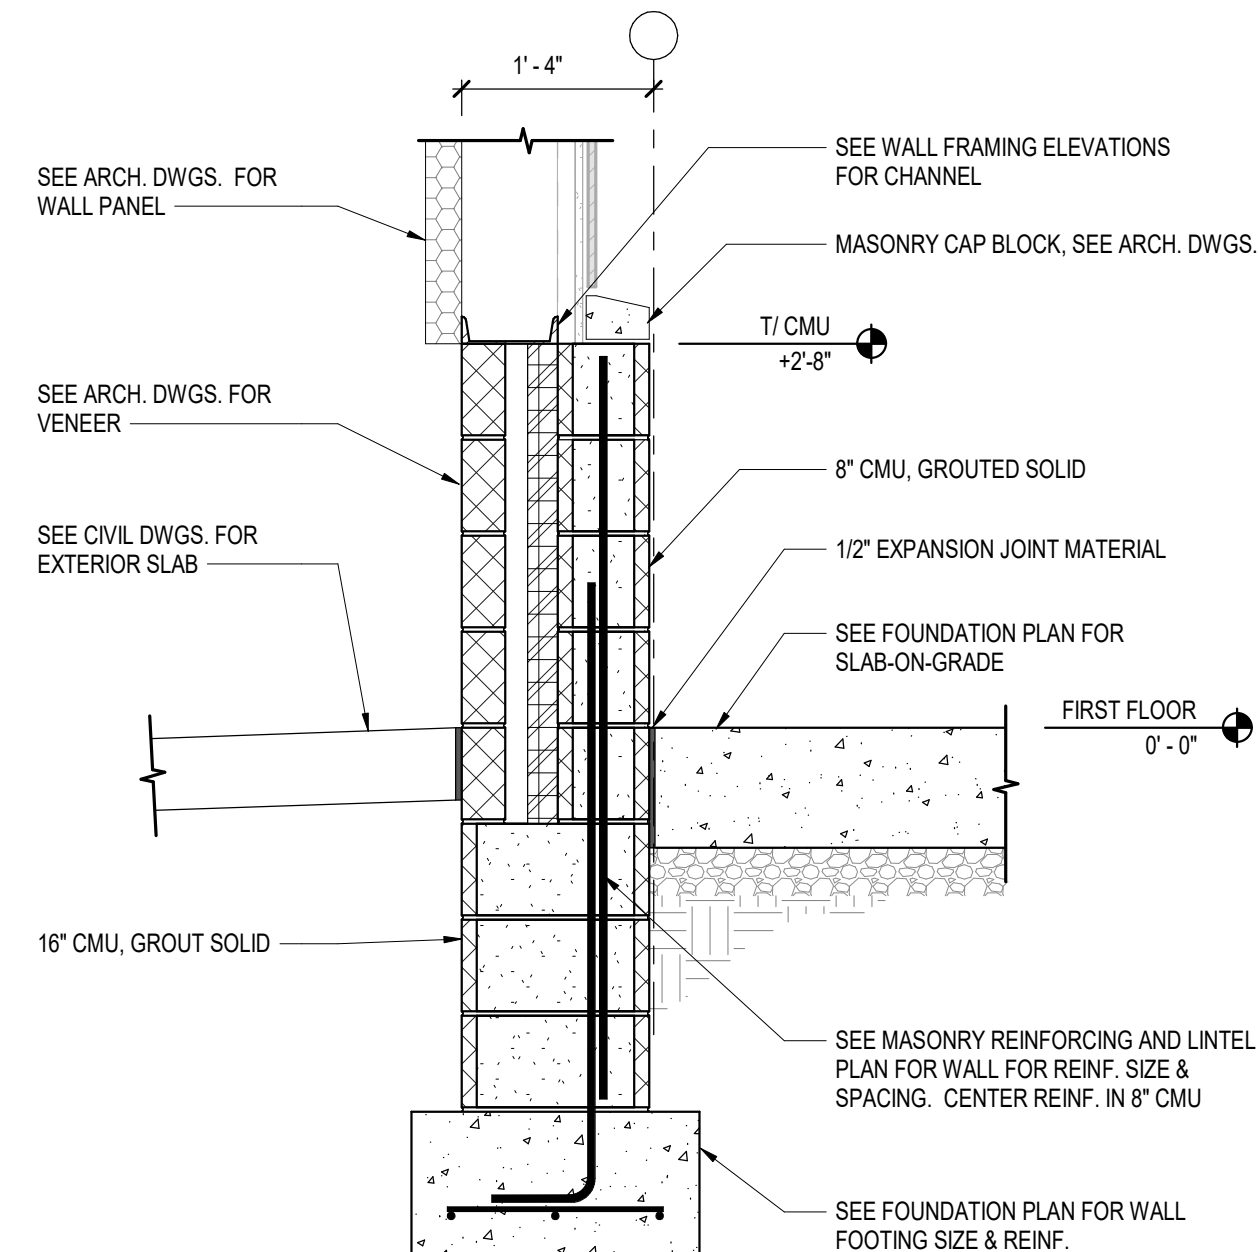


16 SECTION
S401 SCALE: 3/4" = 1'-0"

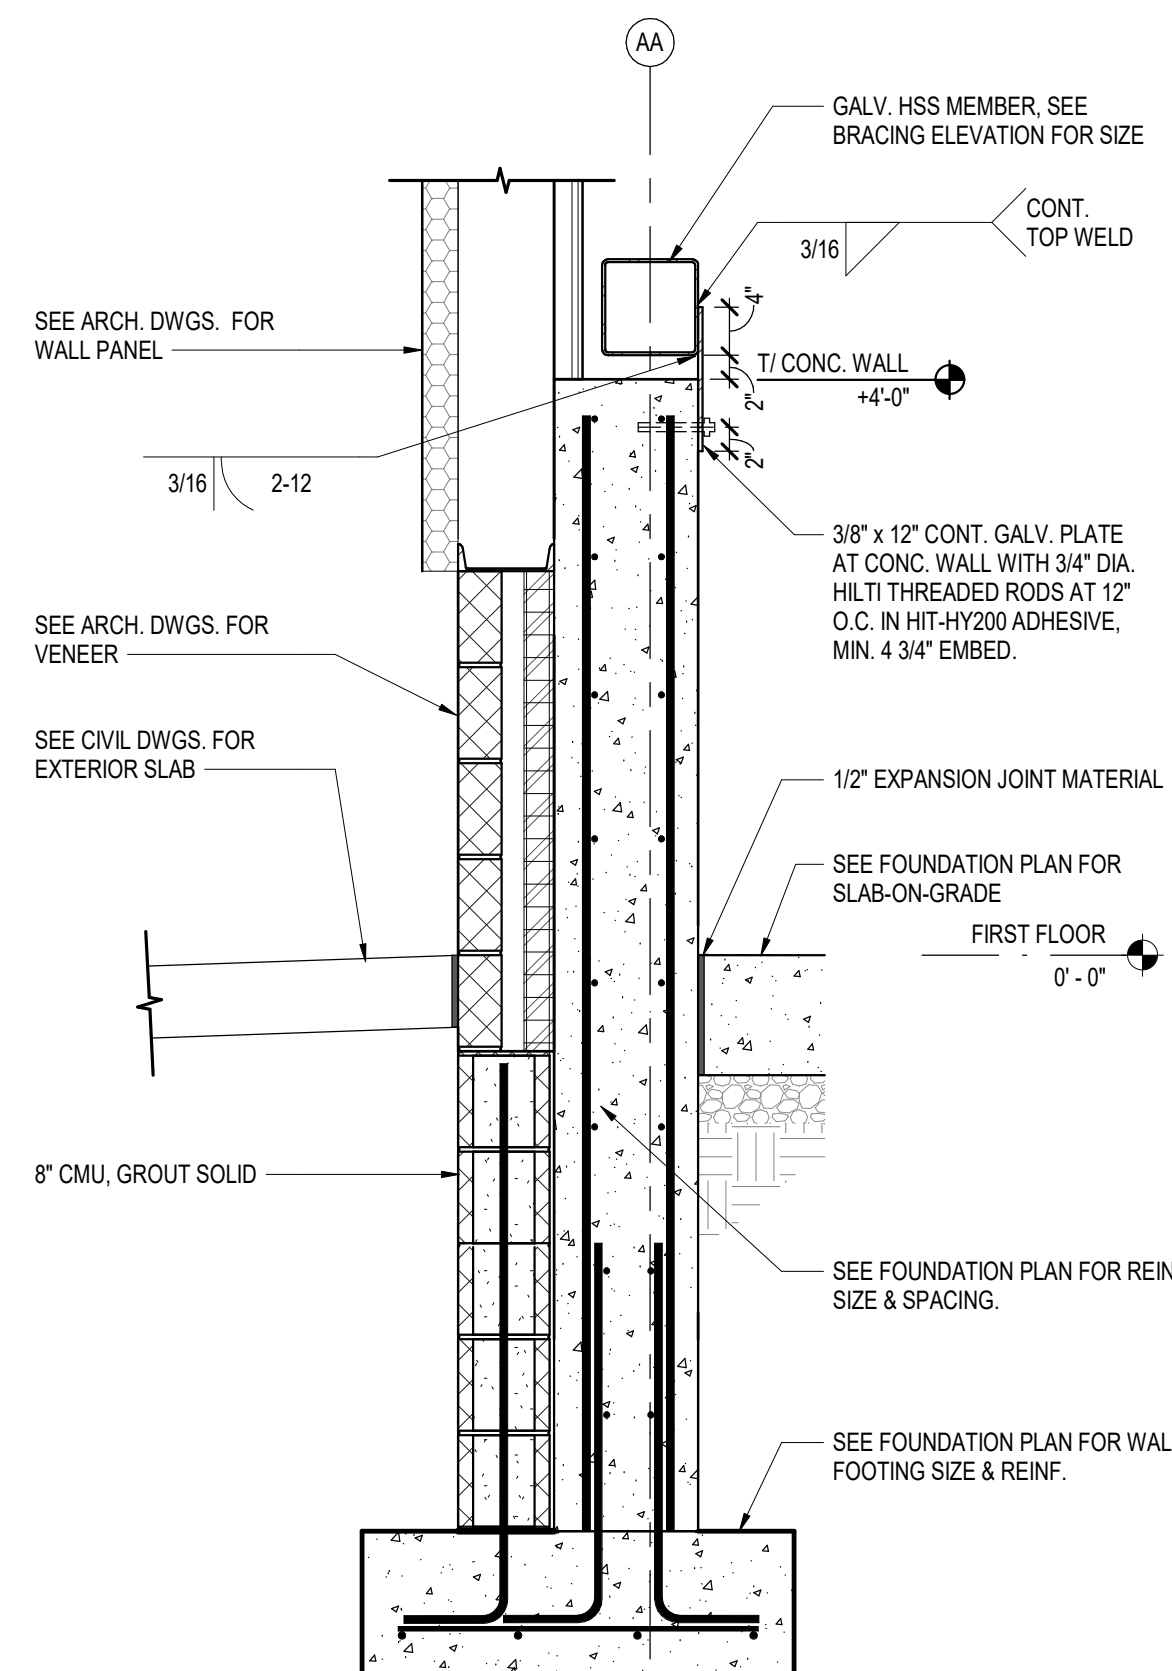


17 SECTION
S401 SCALE: 3/4" = 1'-0"

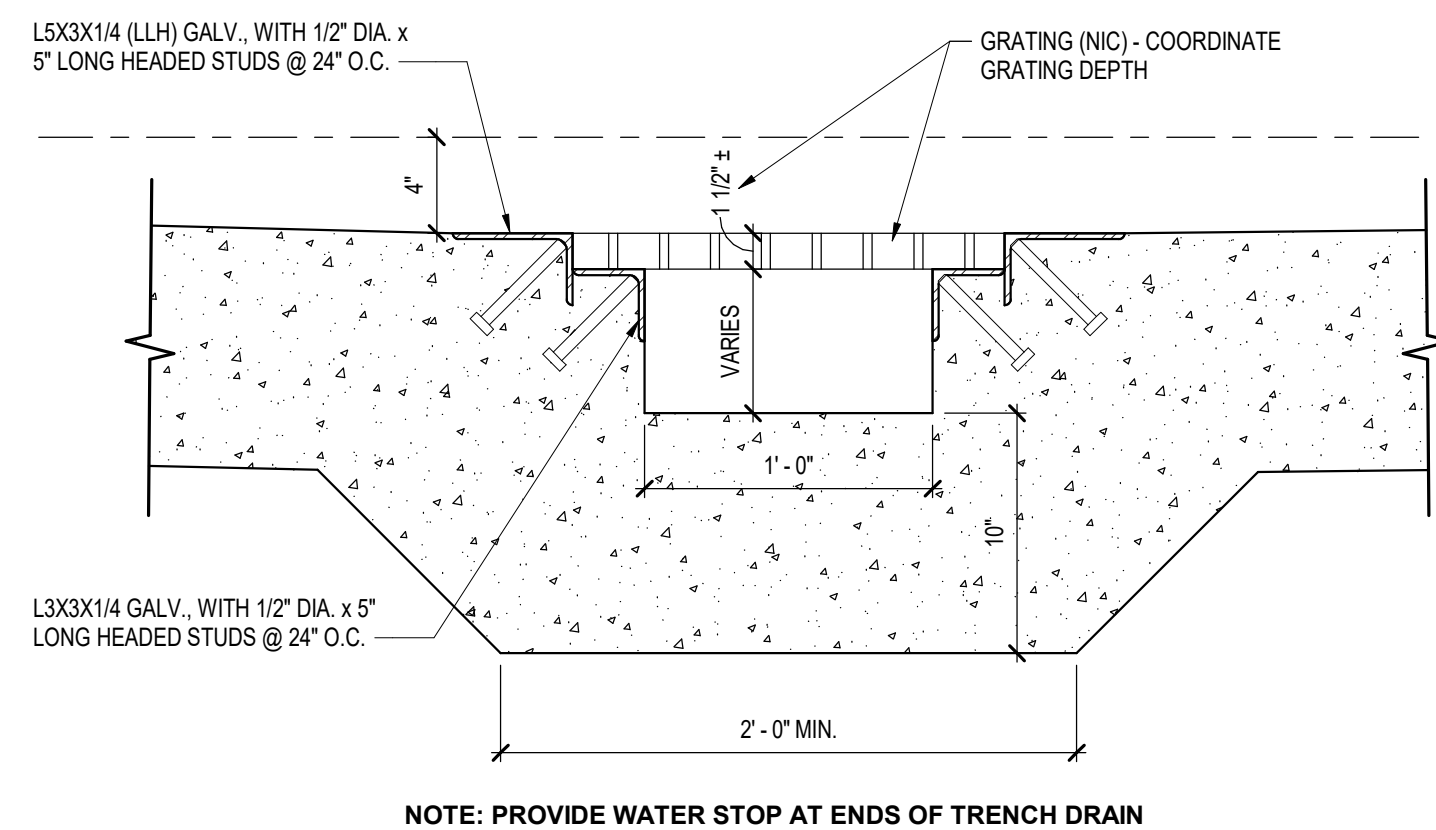


18 SECTION
S401 SCALE: 1 1/2" = 1'-0"

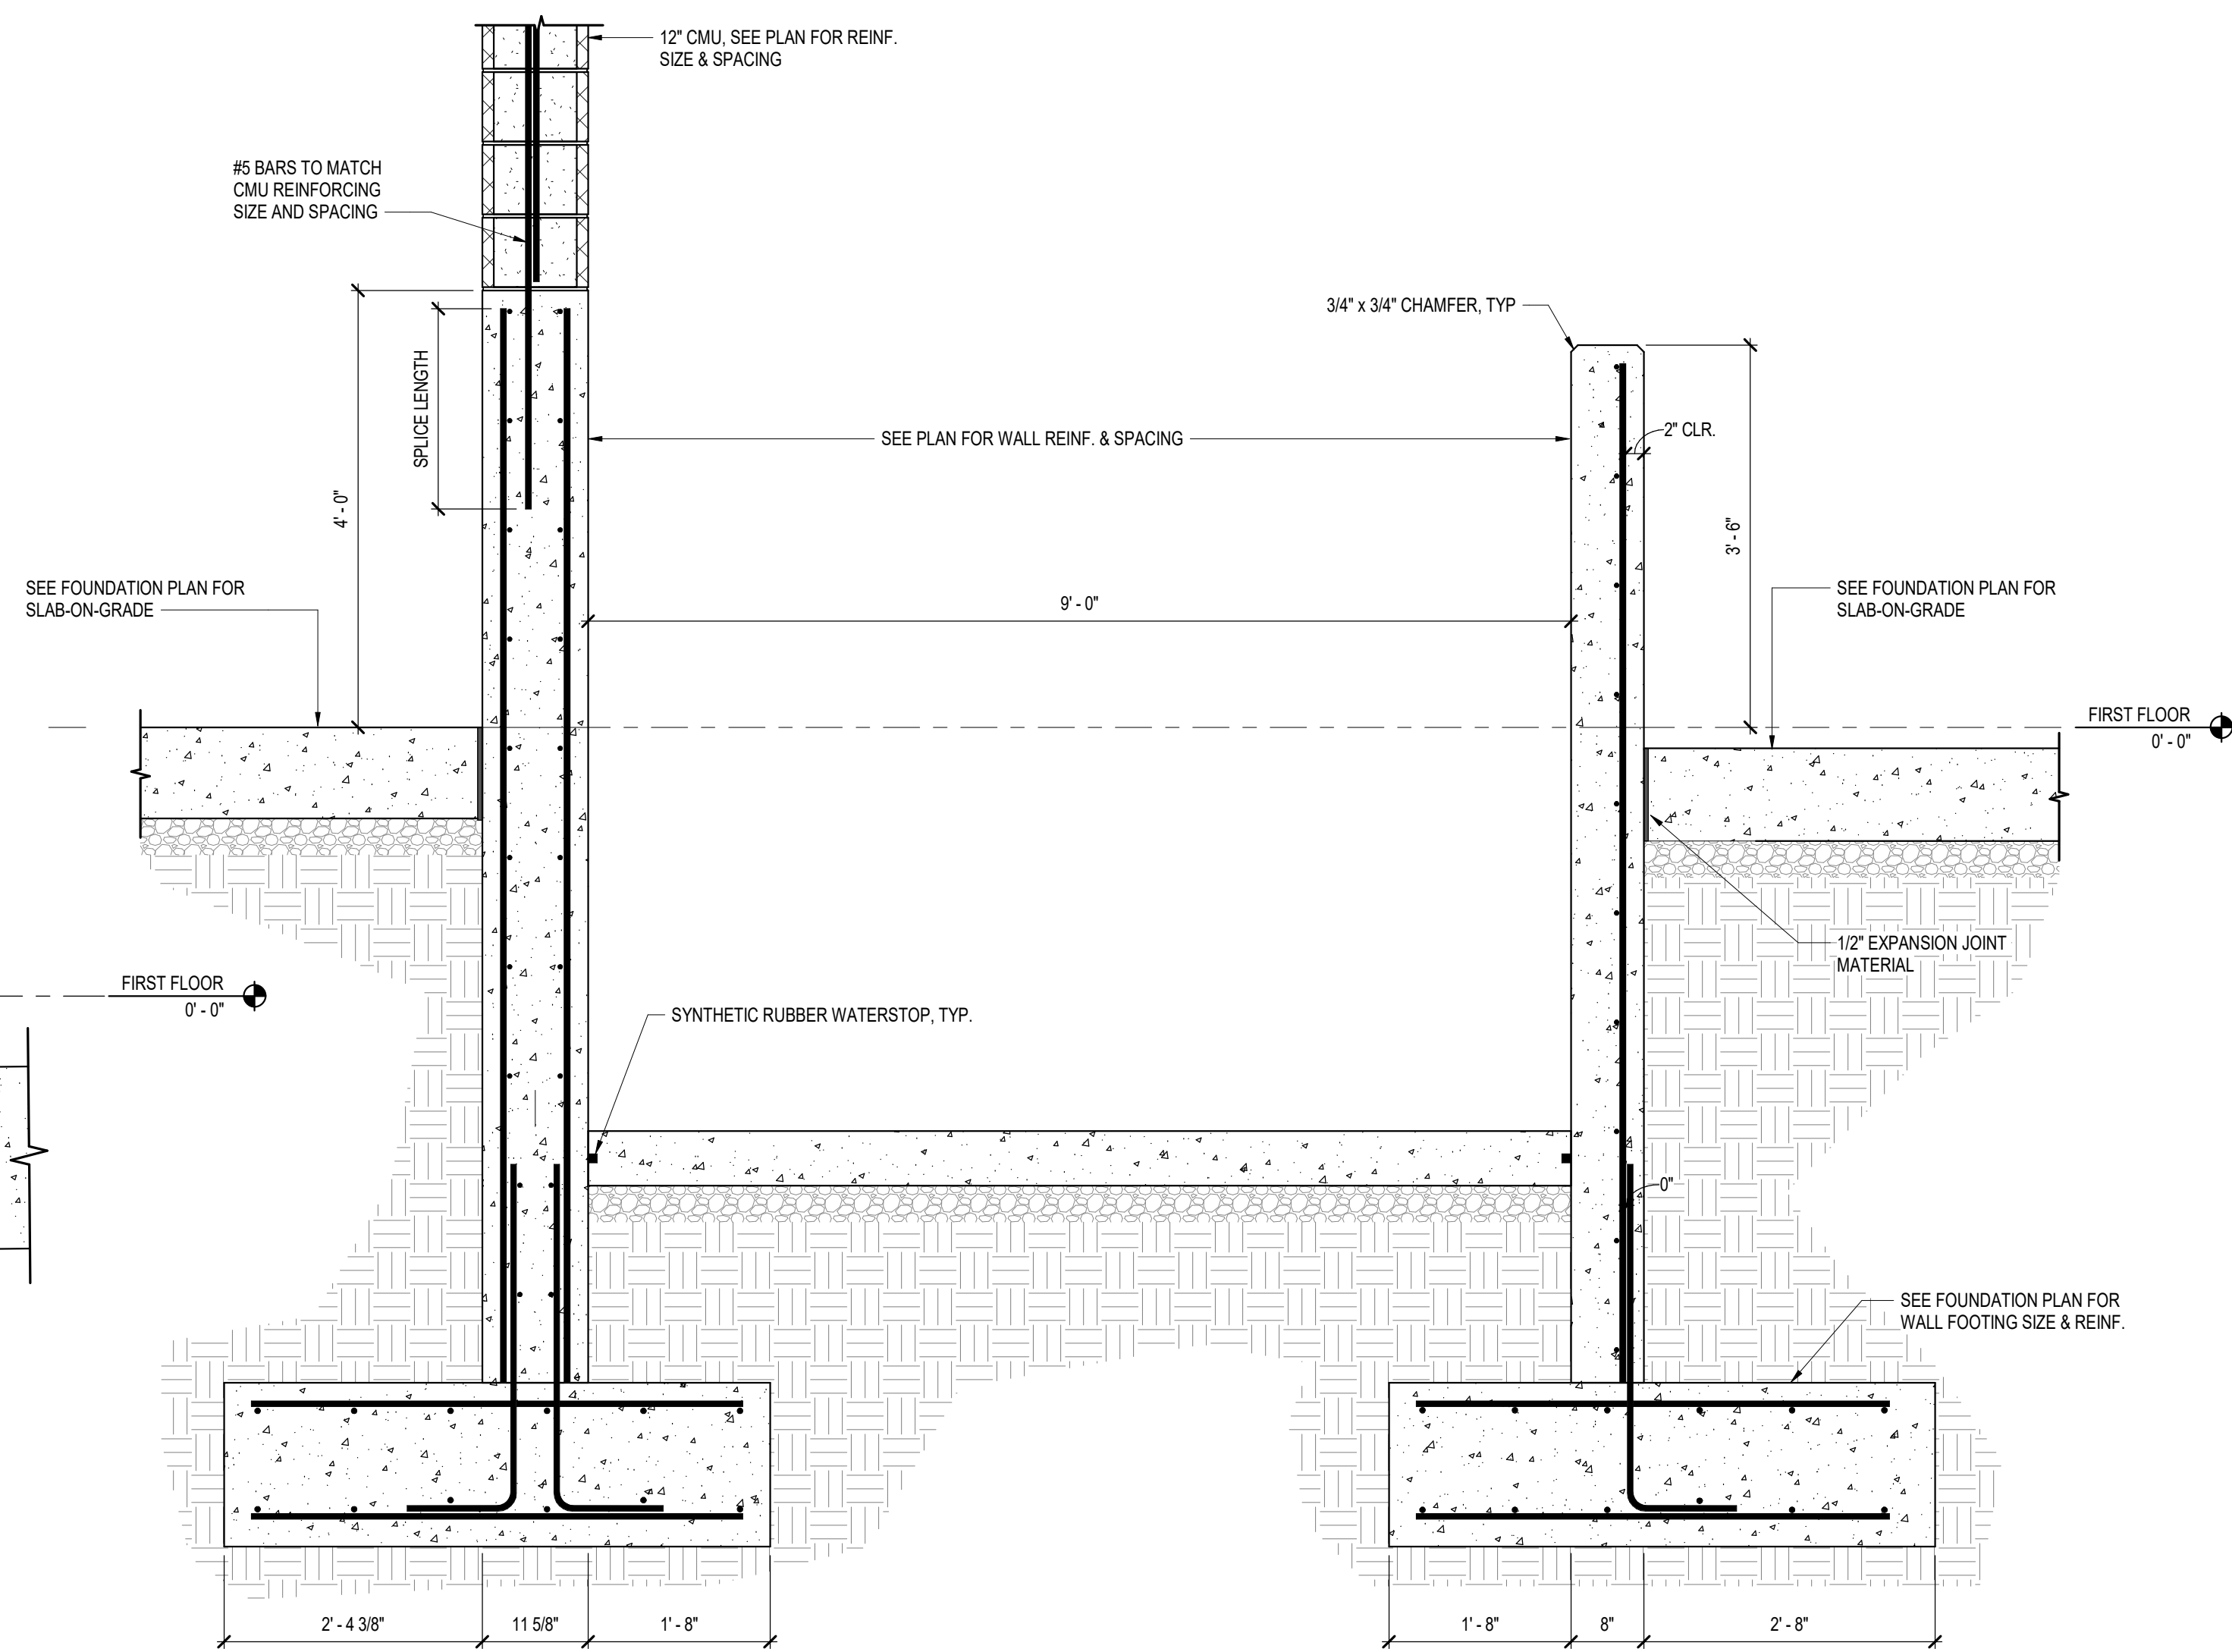


19 SECTION
S401 SCALE: 3/4" = 1'-0"

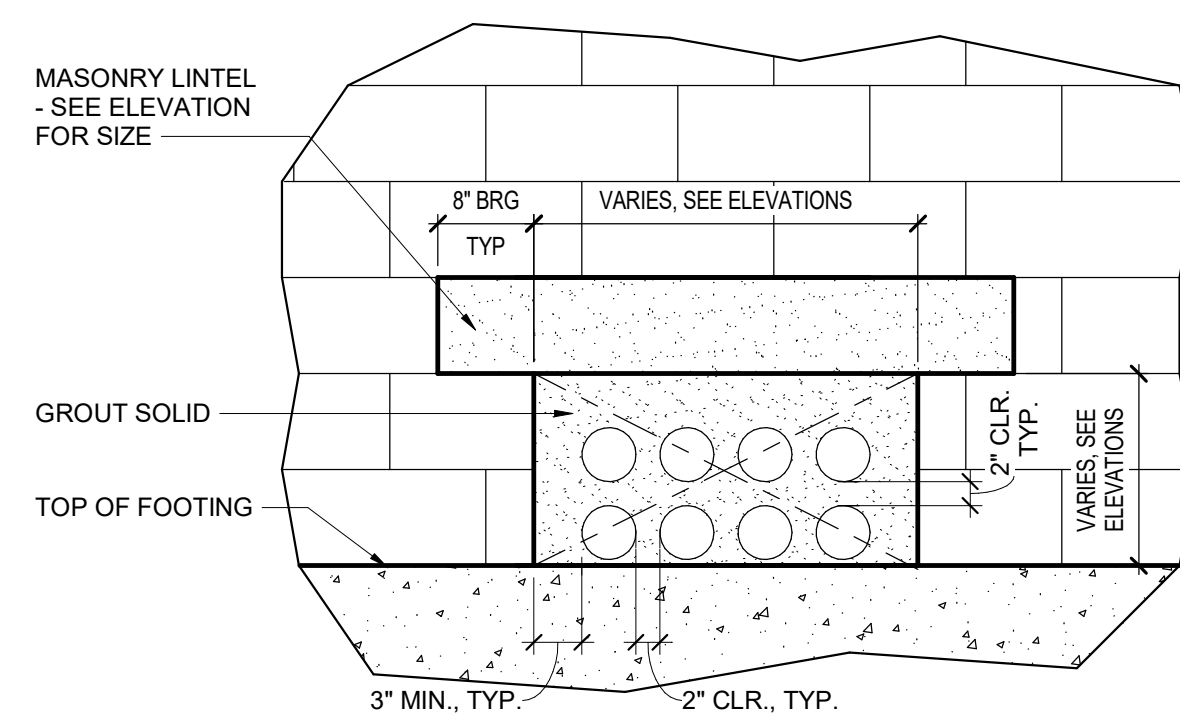


23 ELECTRICAL CONDUIT DUCT BANK DETAIL
S401 NOT TO SCALE

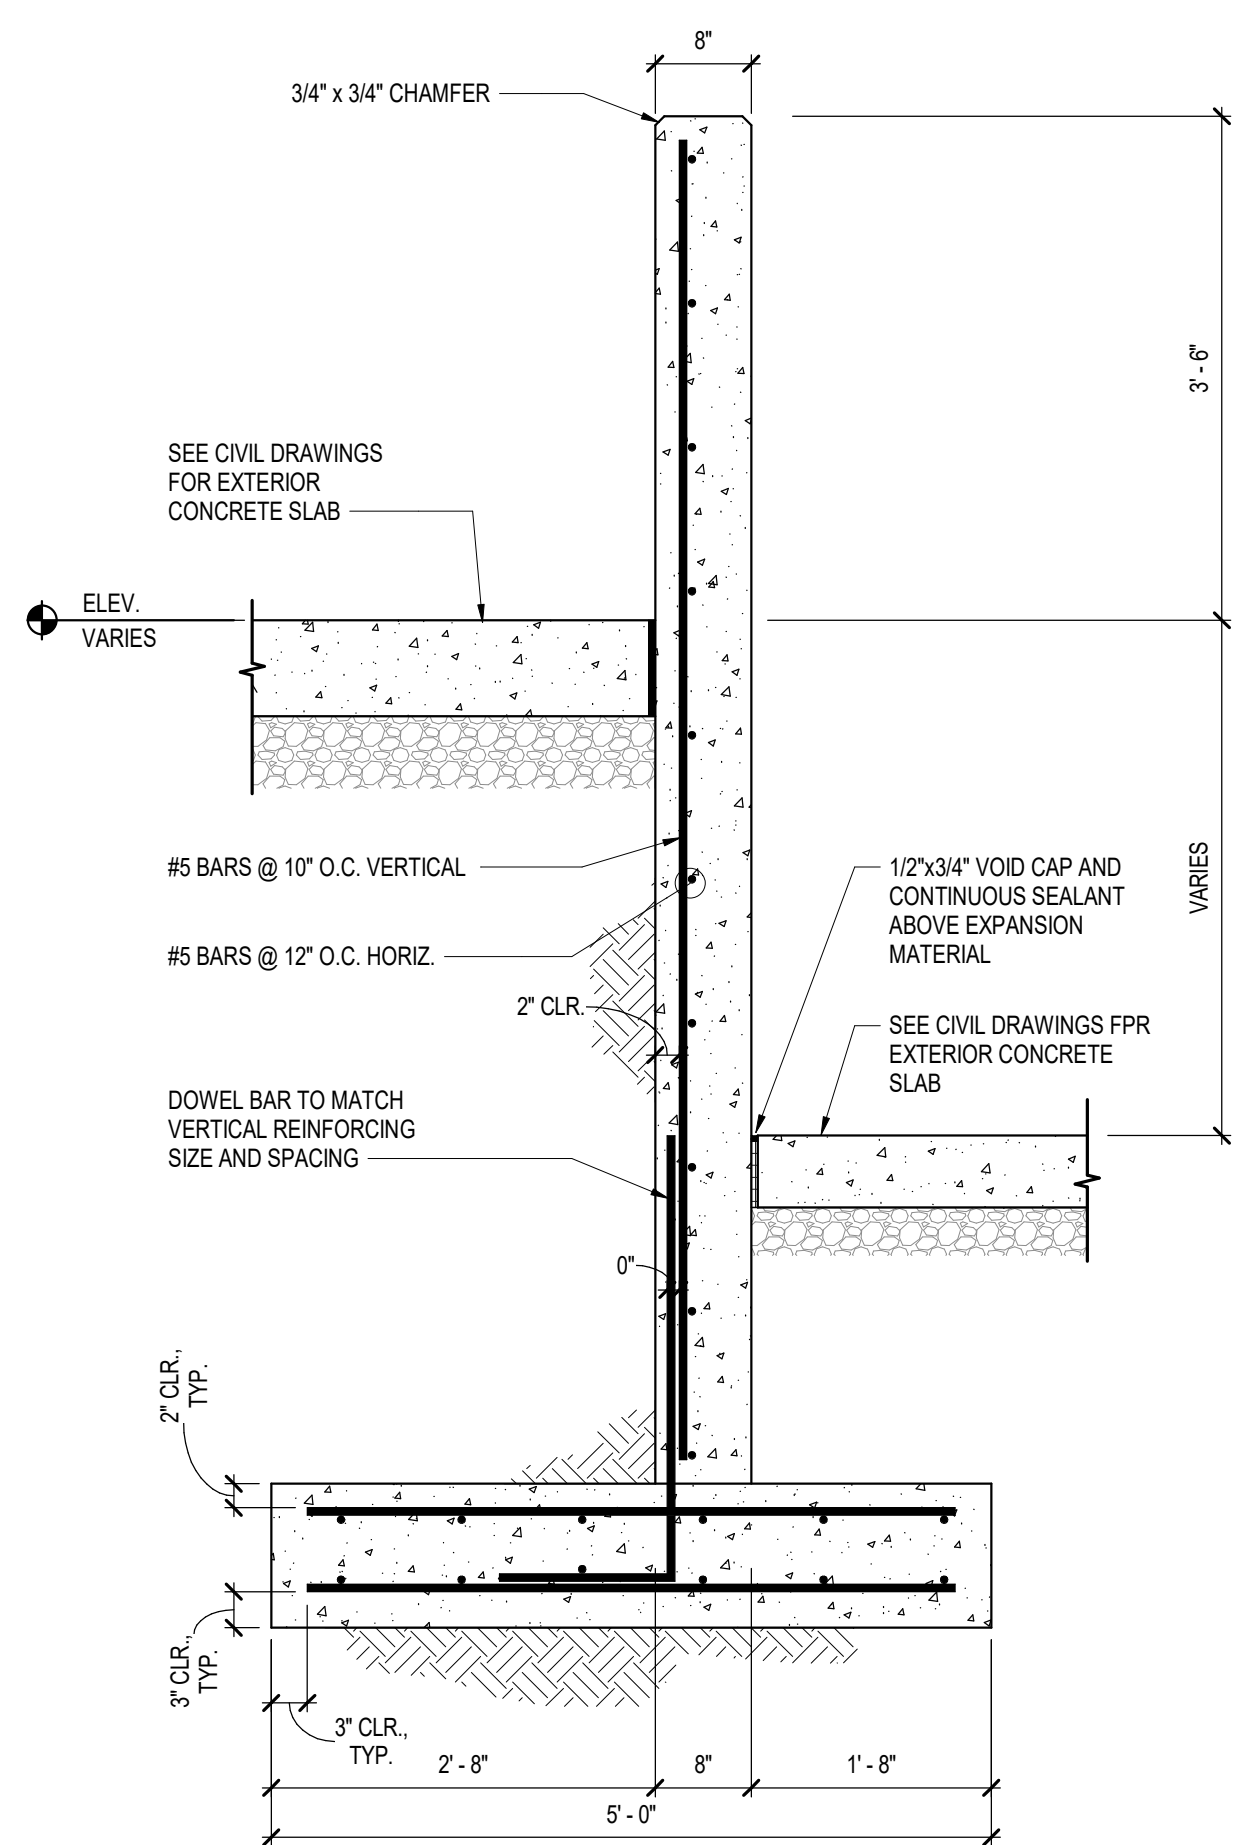


20 SECTION
S401 SCALE: 3/4" = 1'-0"

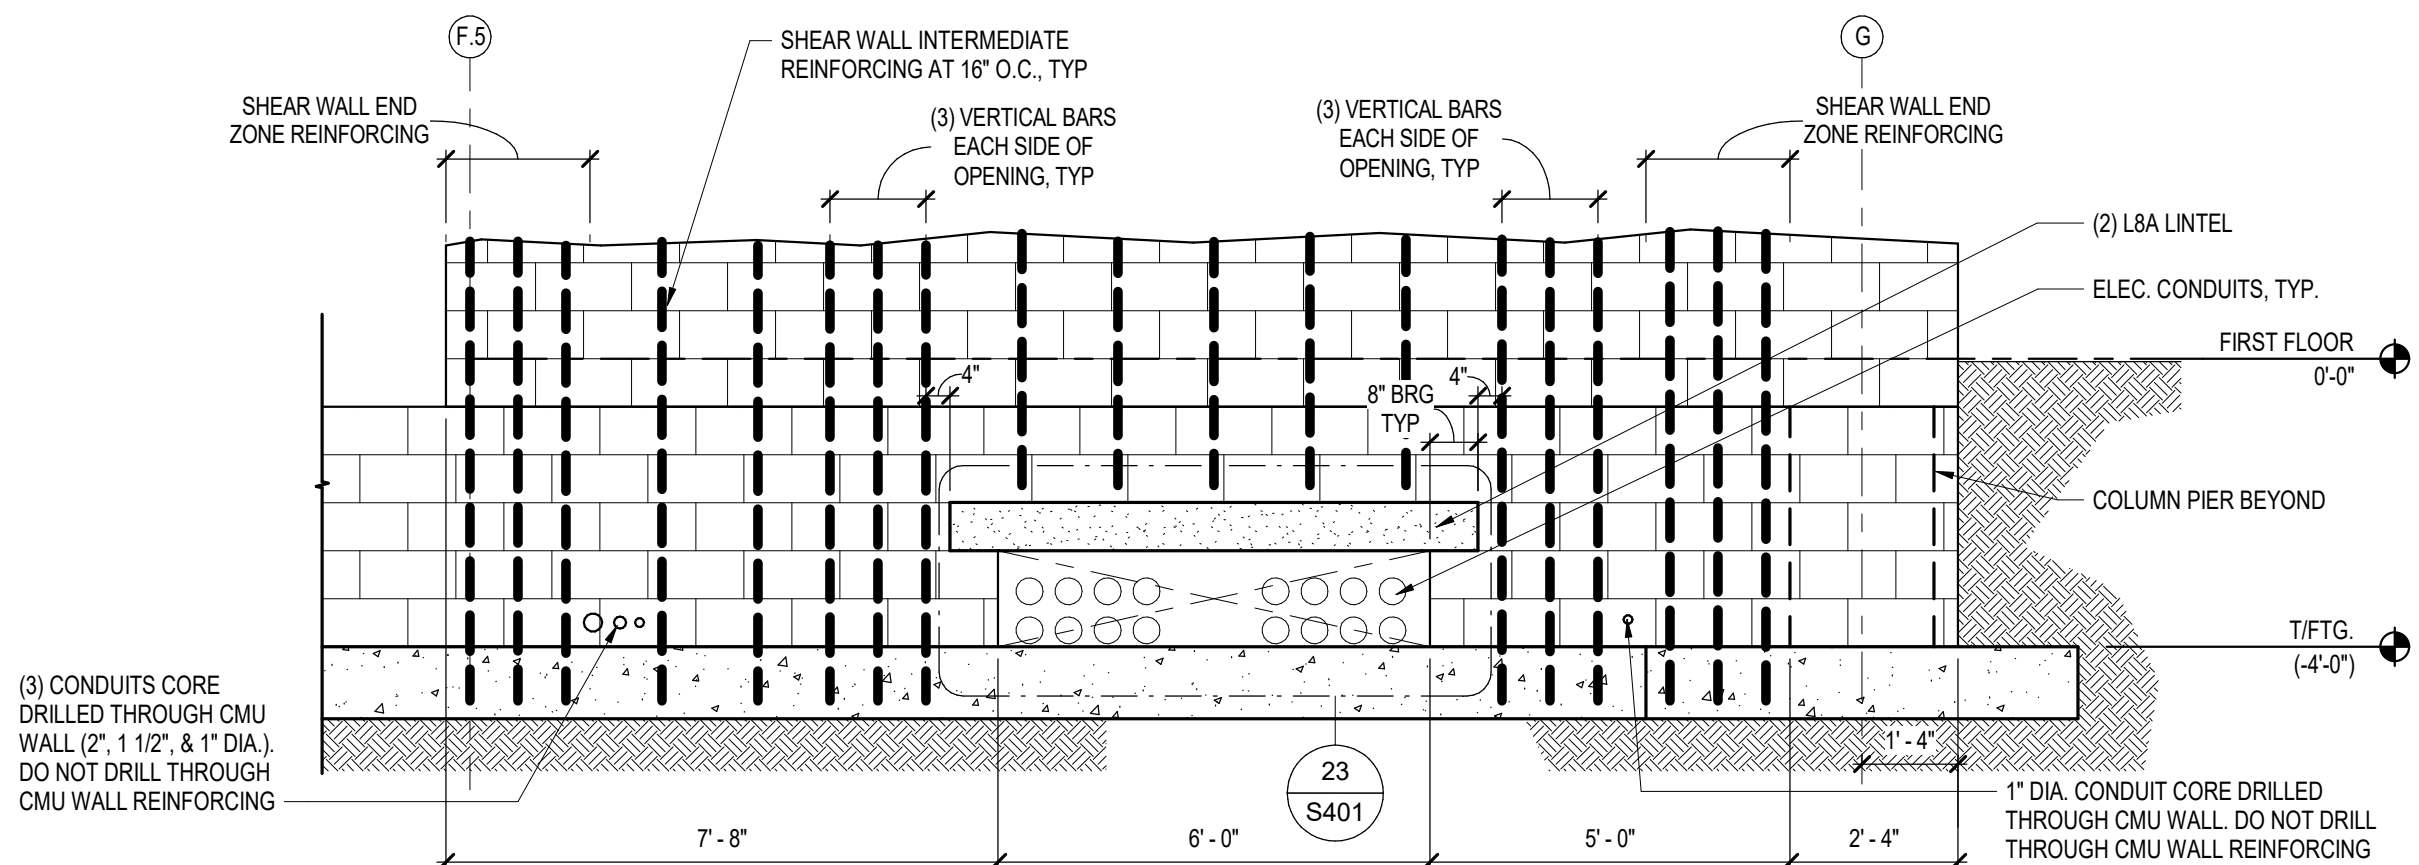















21 FOUNDATION DETAIL AT ELEC CONDUIT DUCTBANK - WEST WALL
S401 SCALE: 3/8" = 1'-0"

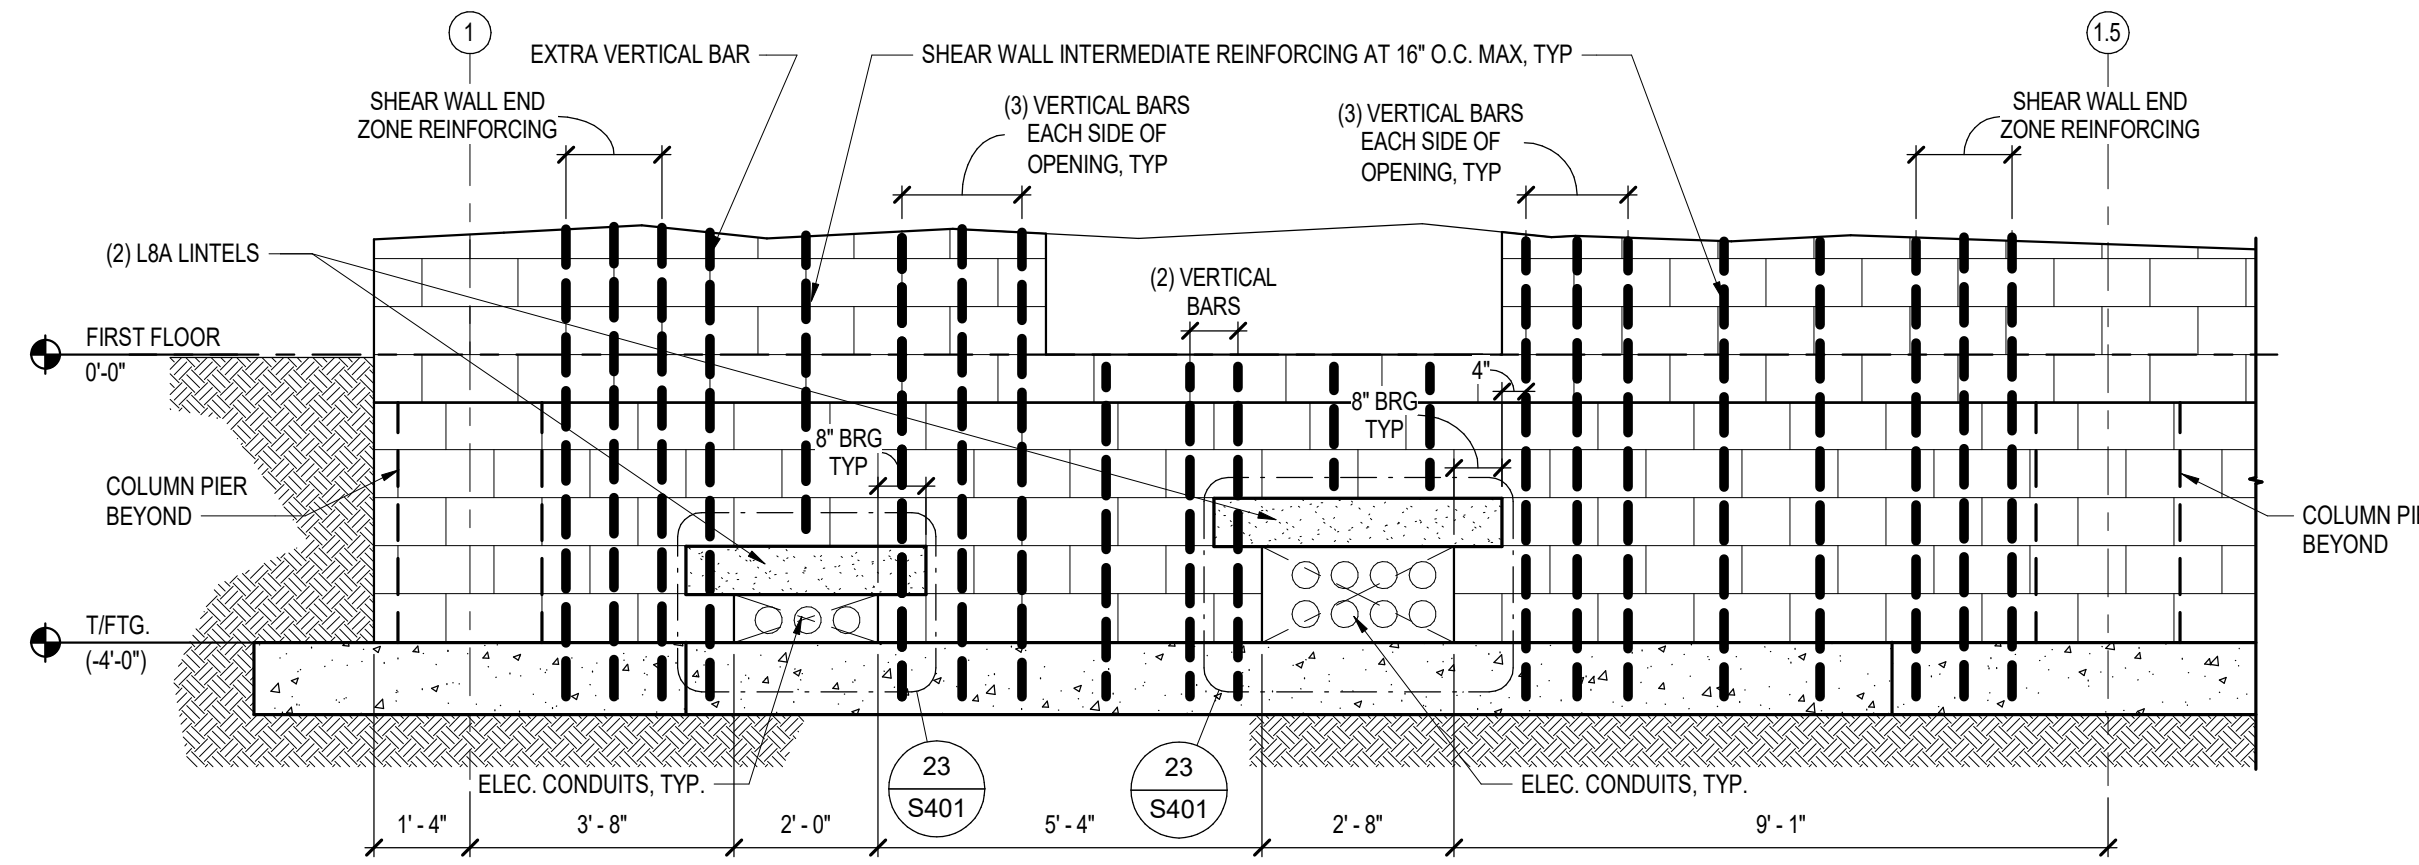


22 FOUNDATION DETAIL AT ELEC CONDUIT DUCTBANK - SOUTH WALL
S401 SCALE: 3/8" = 1'-0"

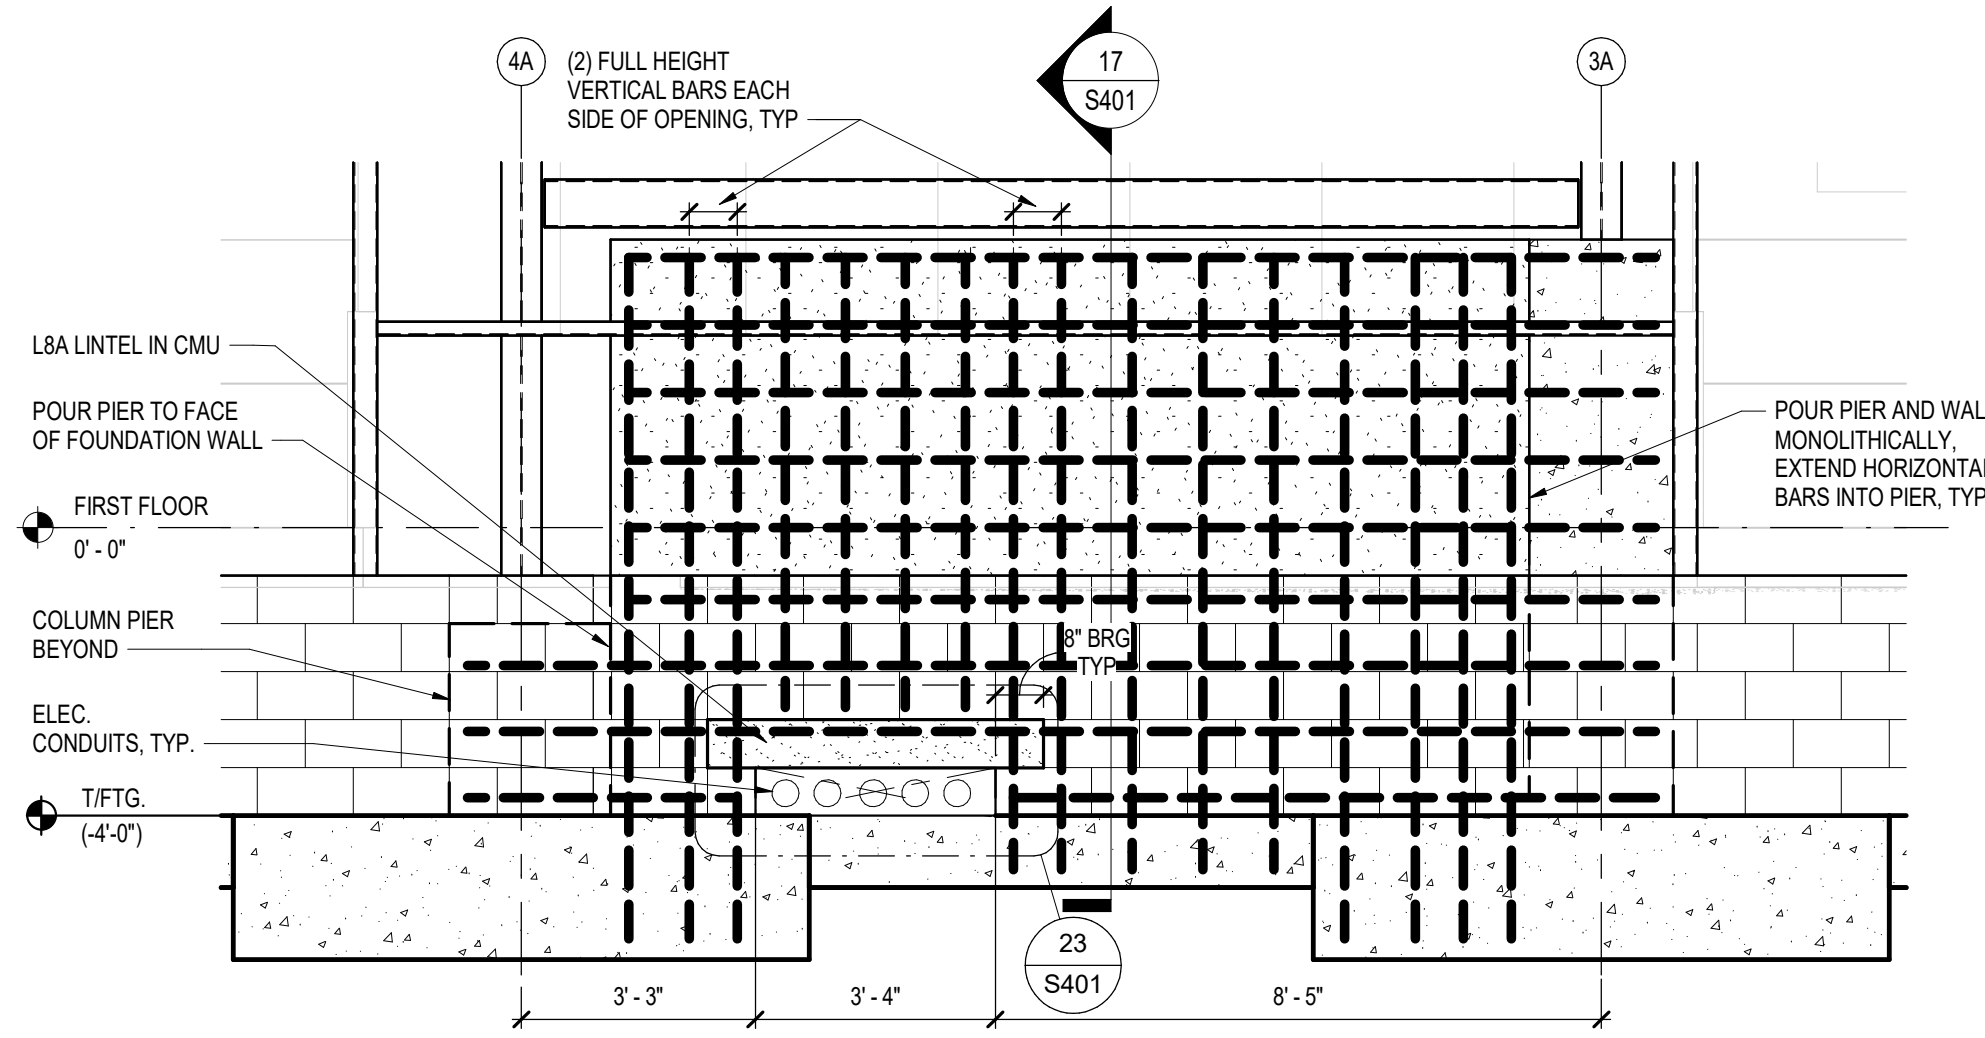


24 FOUNDATION DETAIL AT ELEC CONDUIT DUCTBANK - AUXILIARY BUILDING
S401 SCALE: 3/8" = 1'-0"

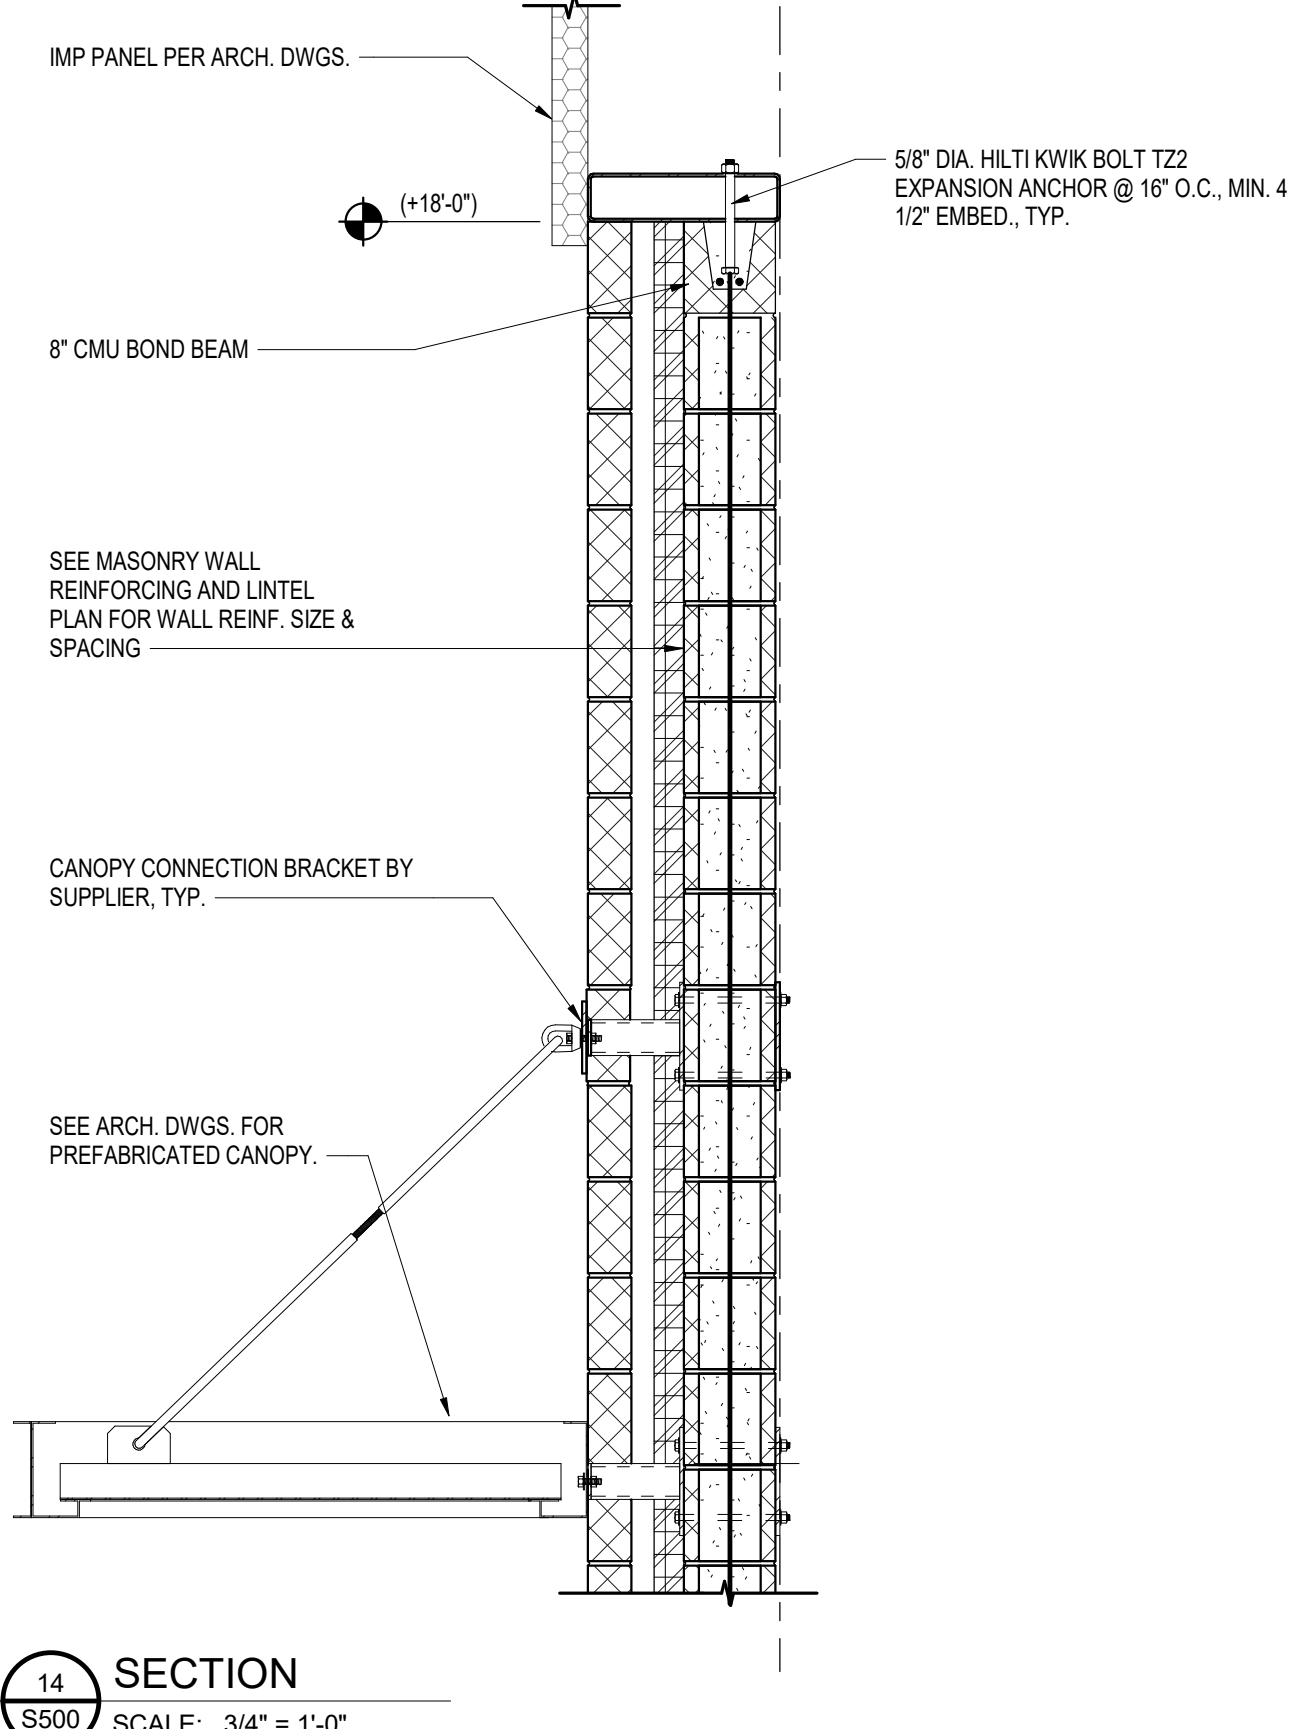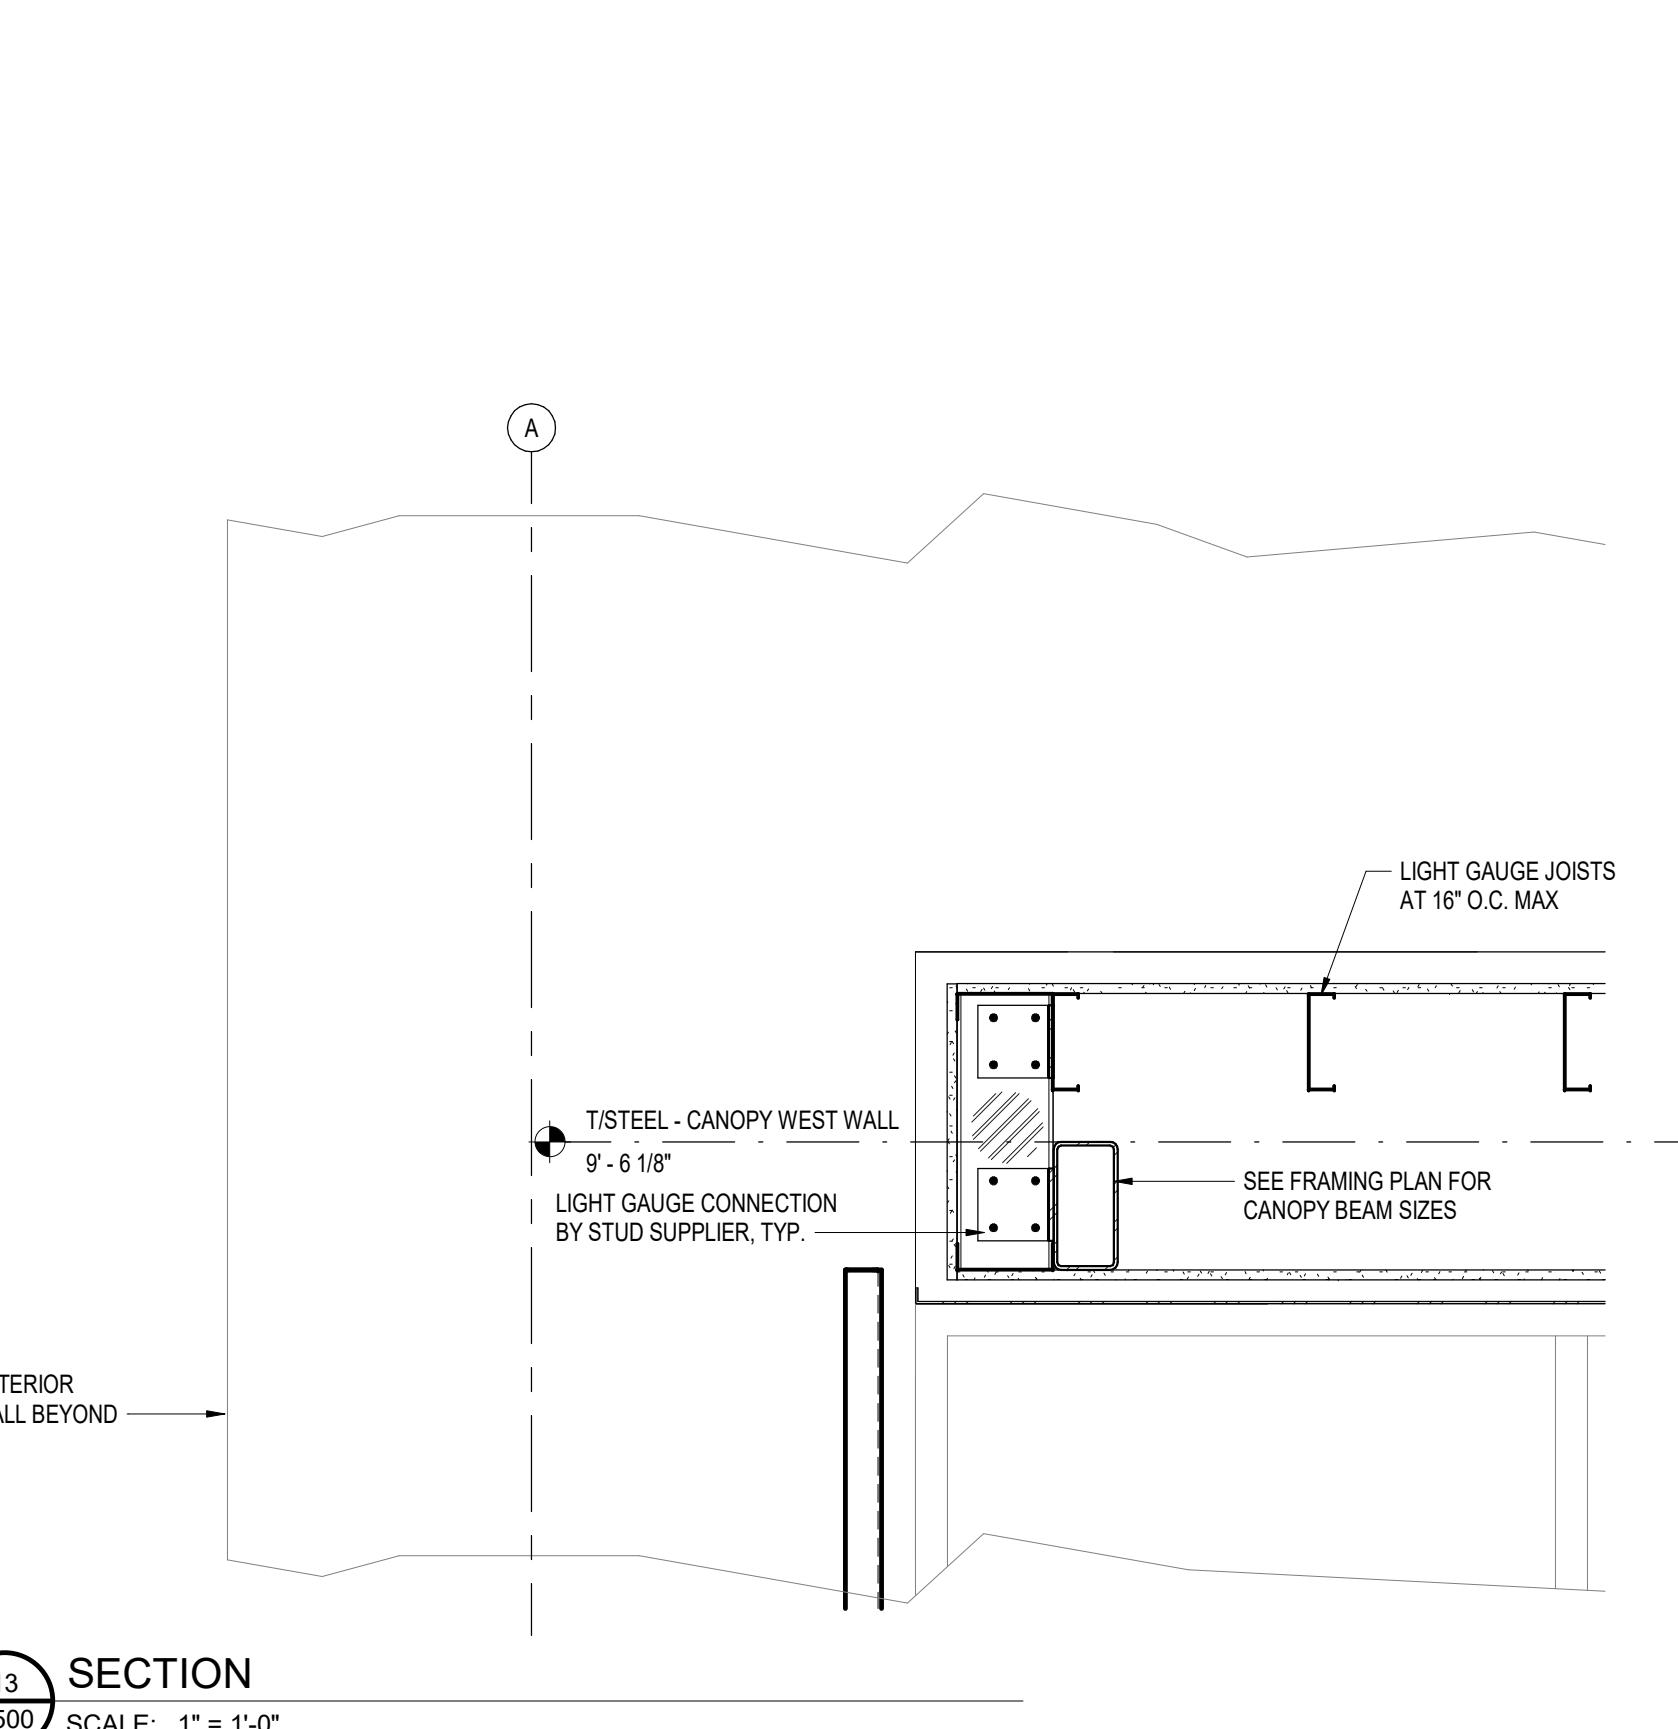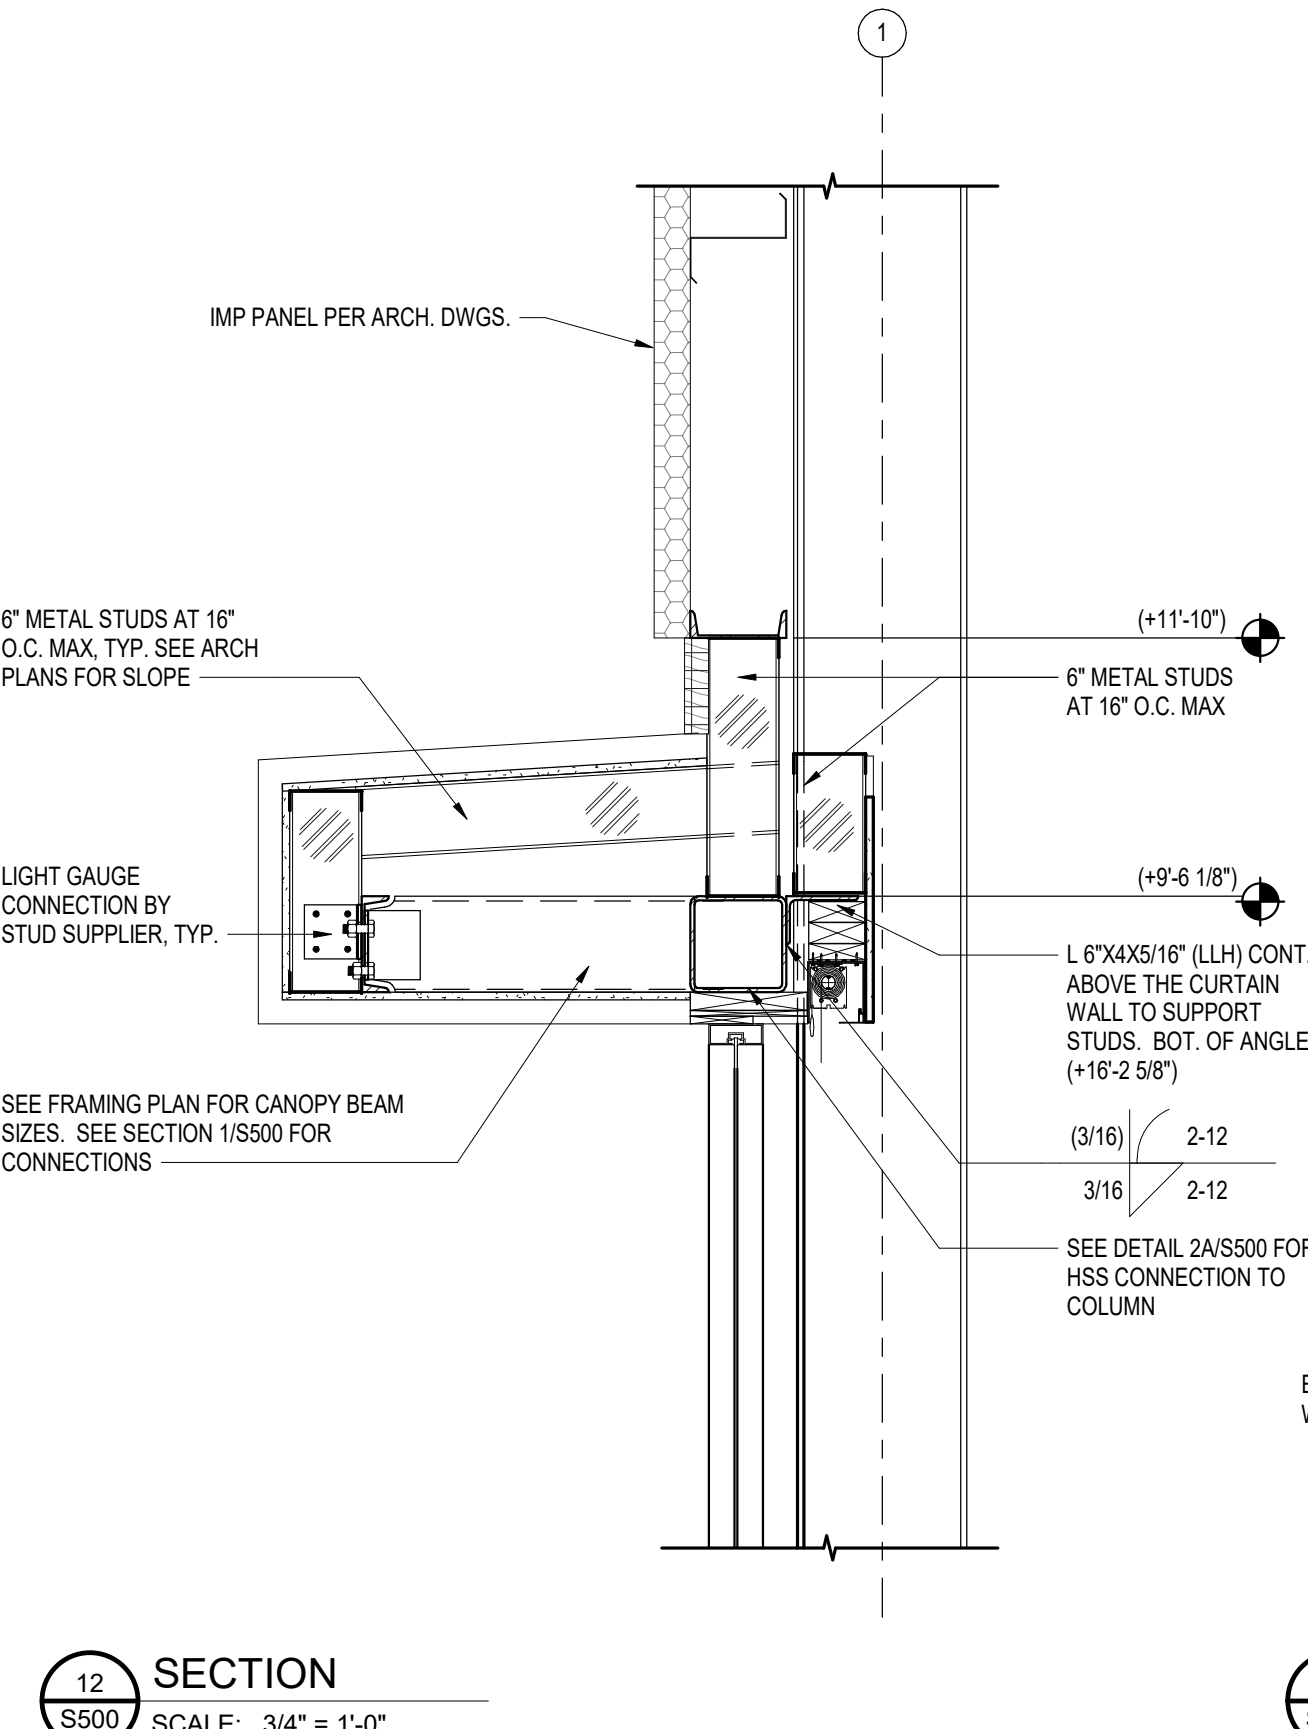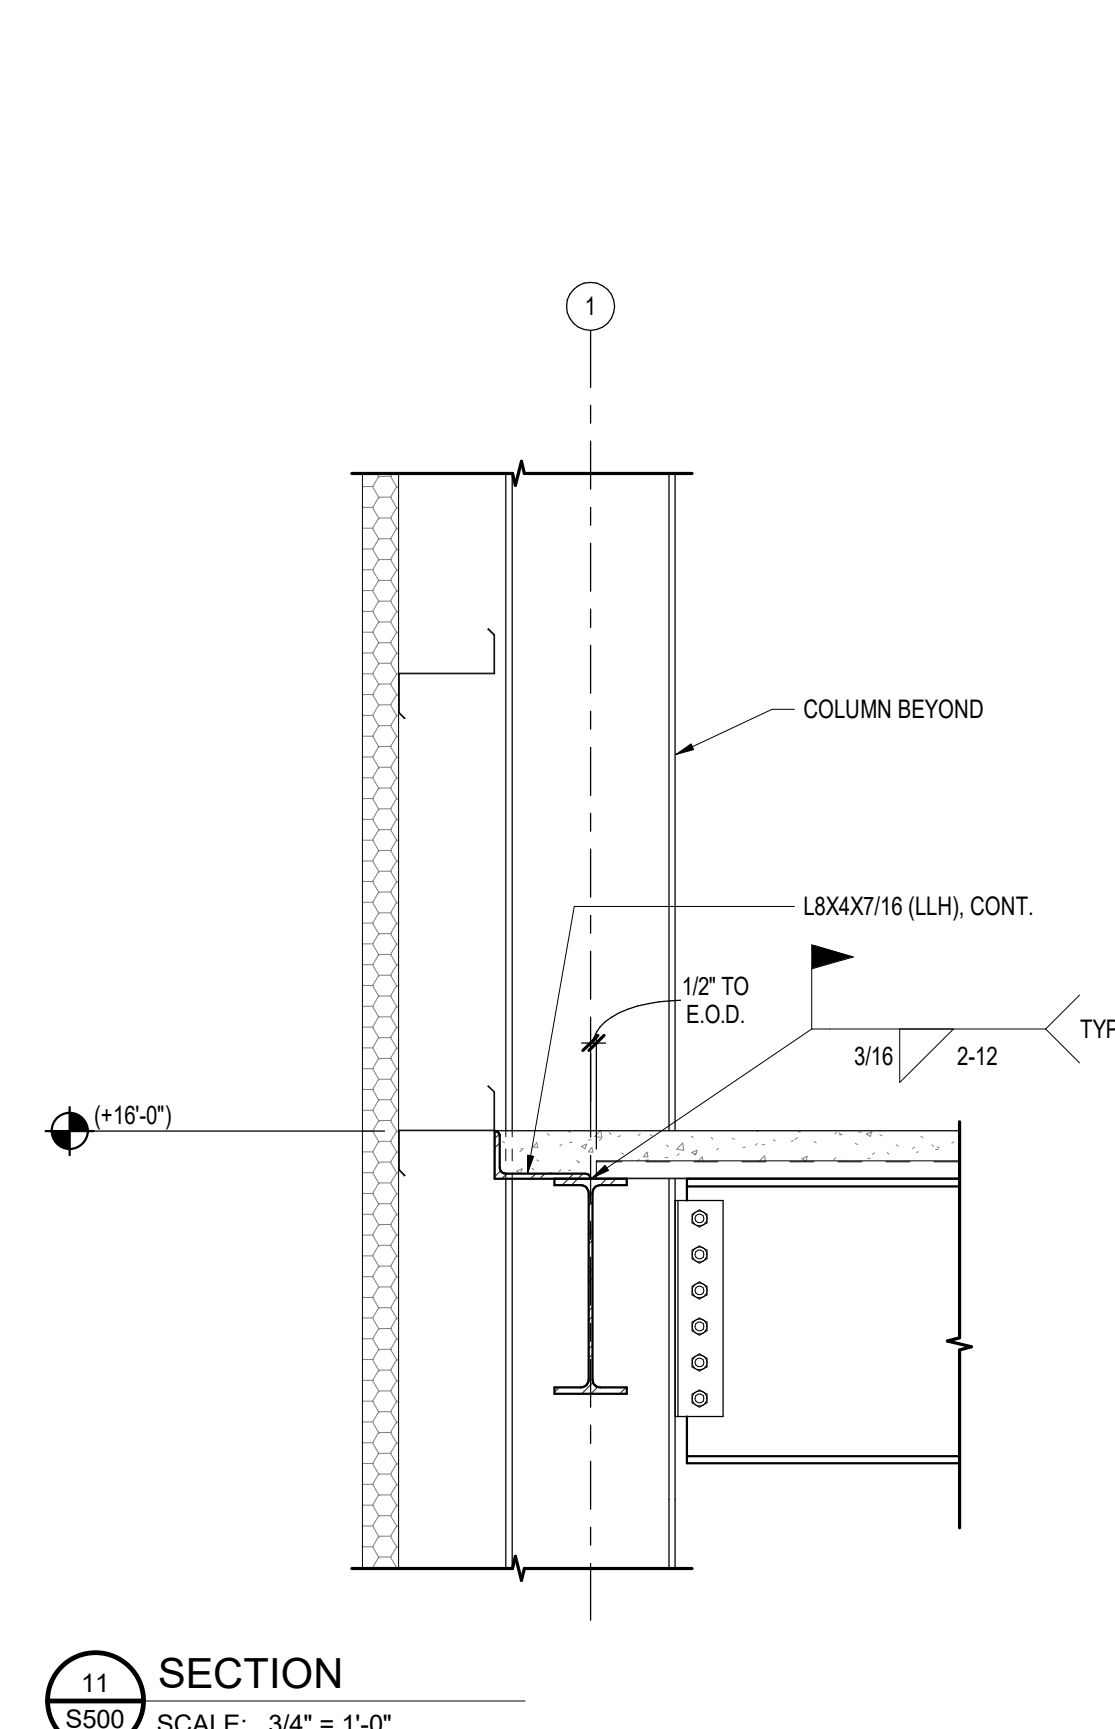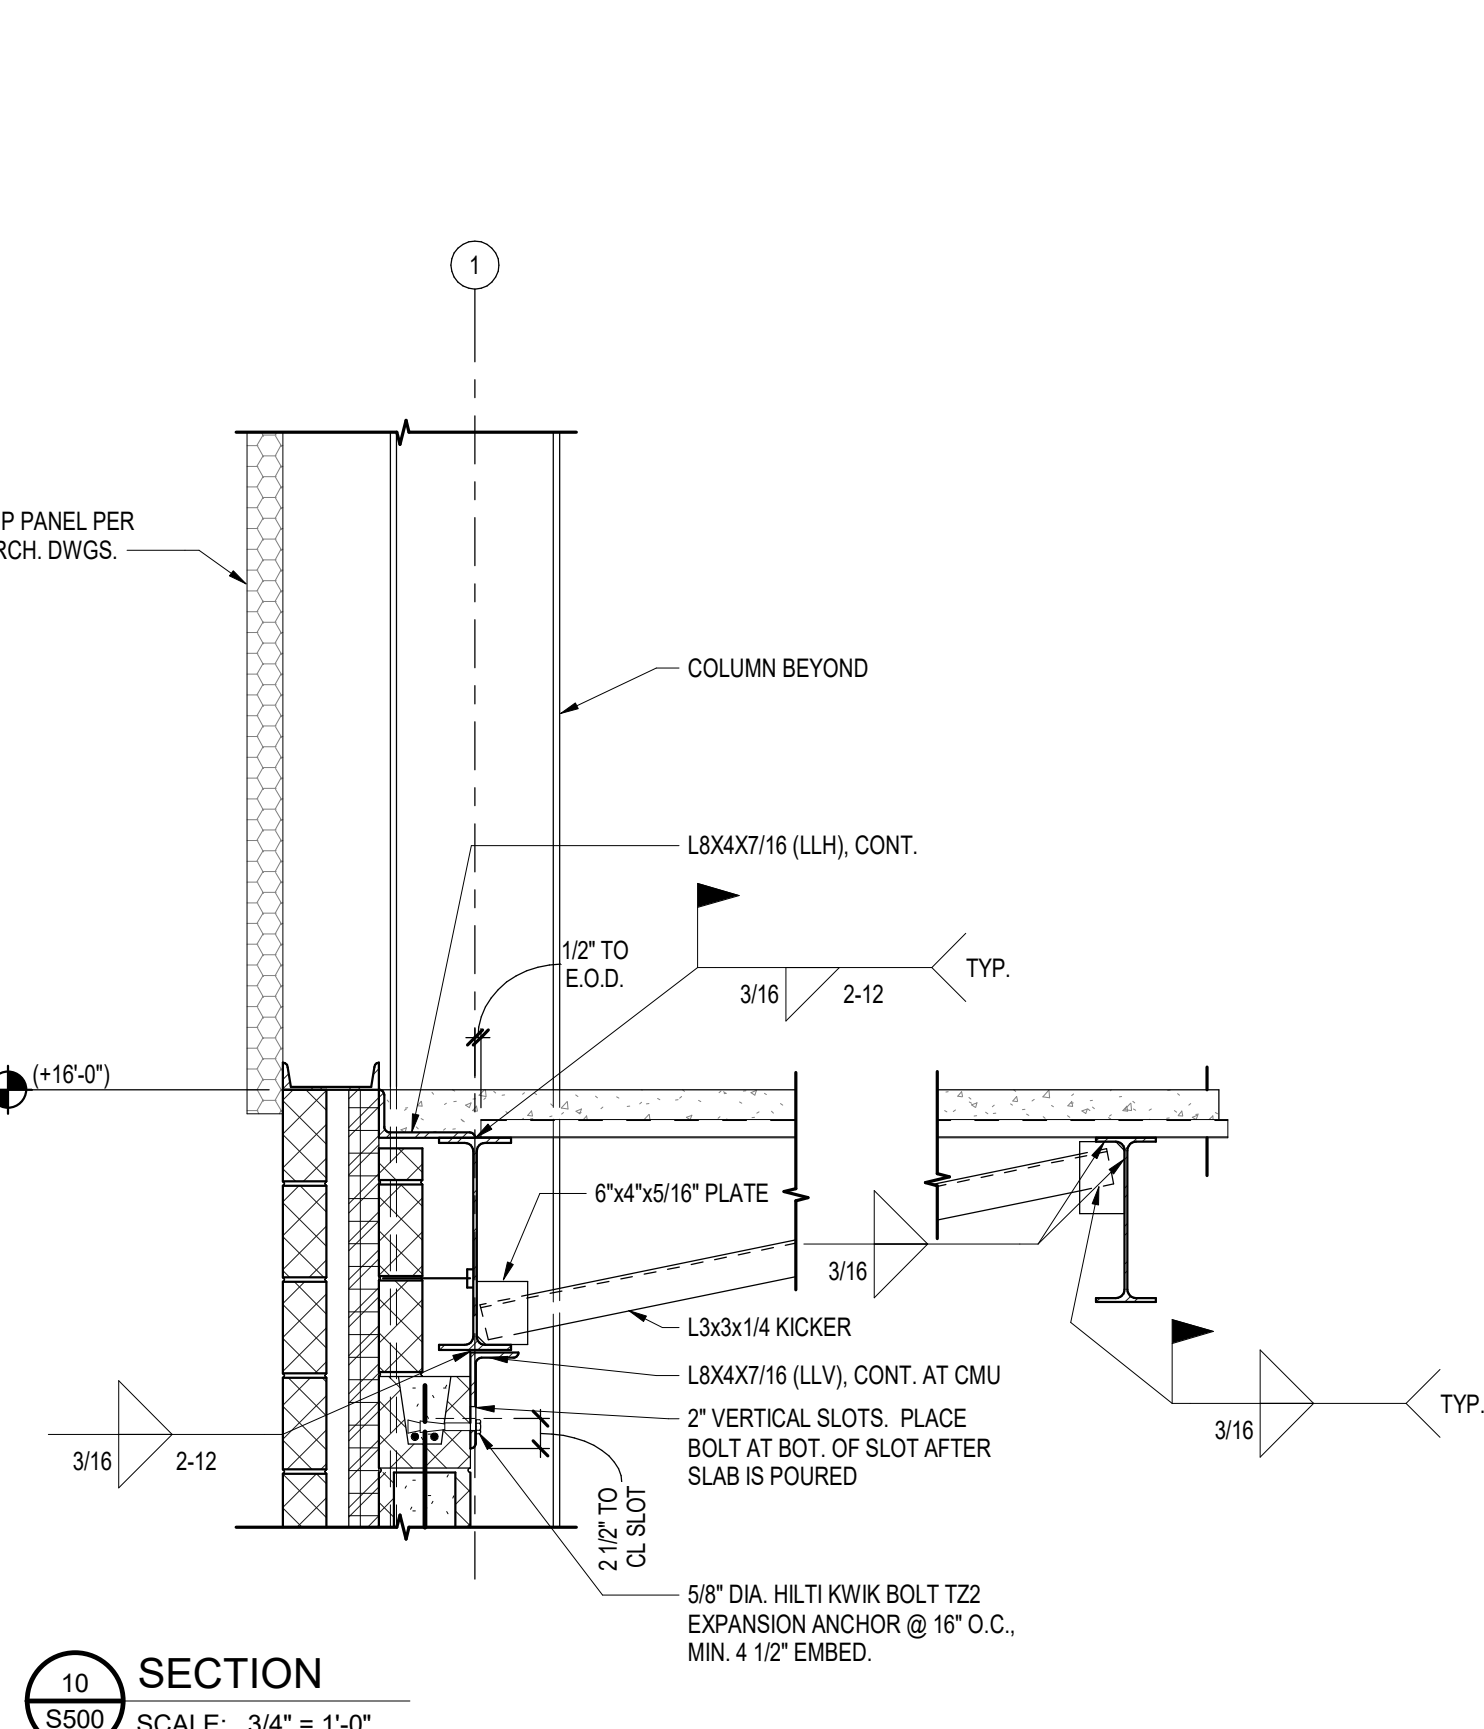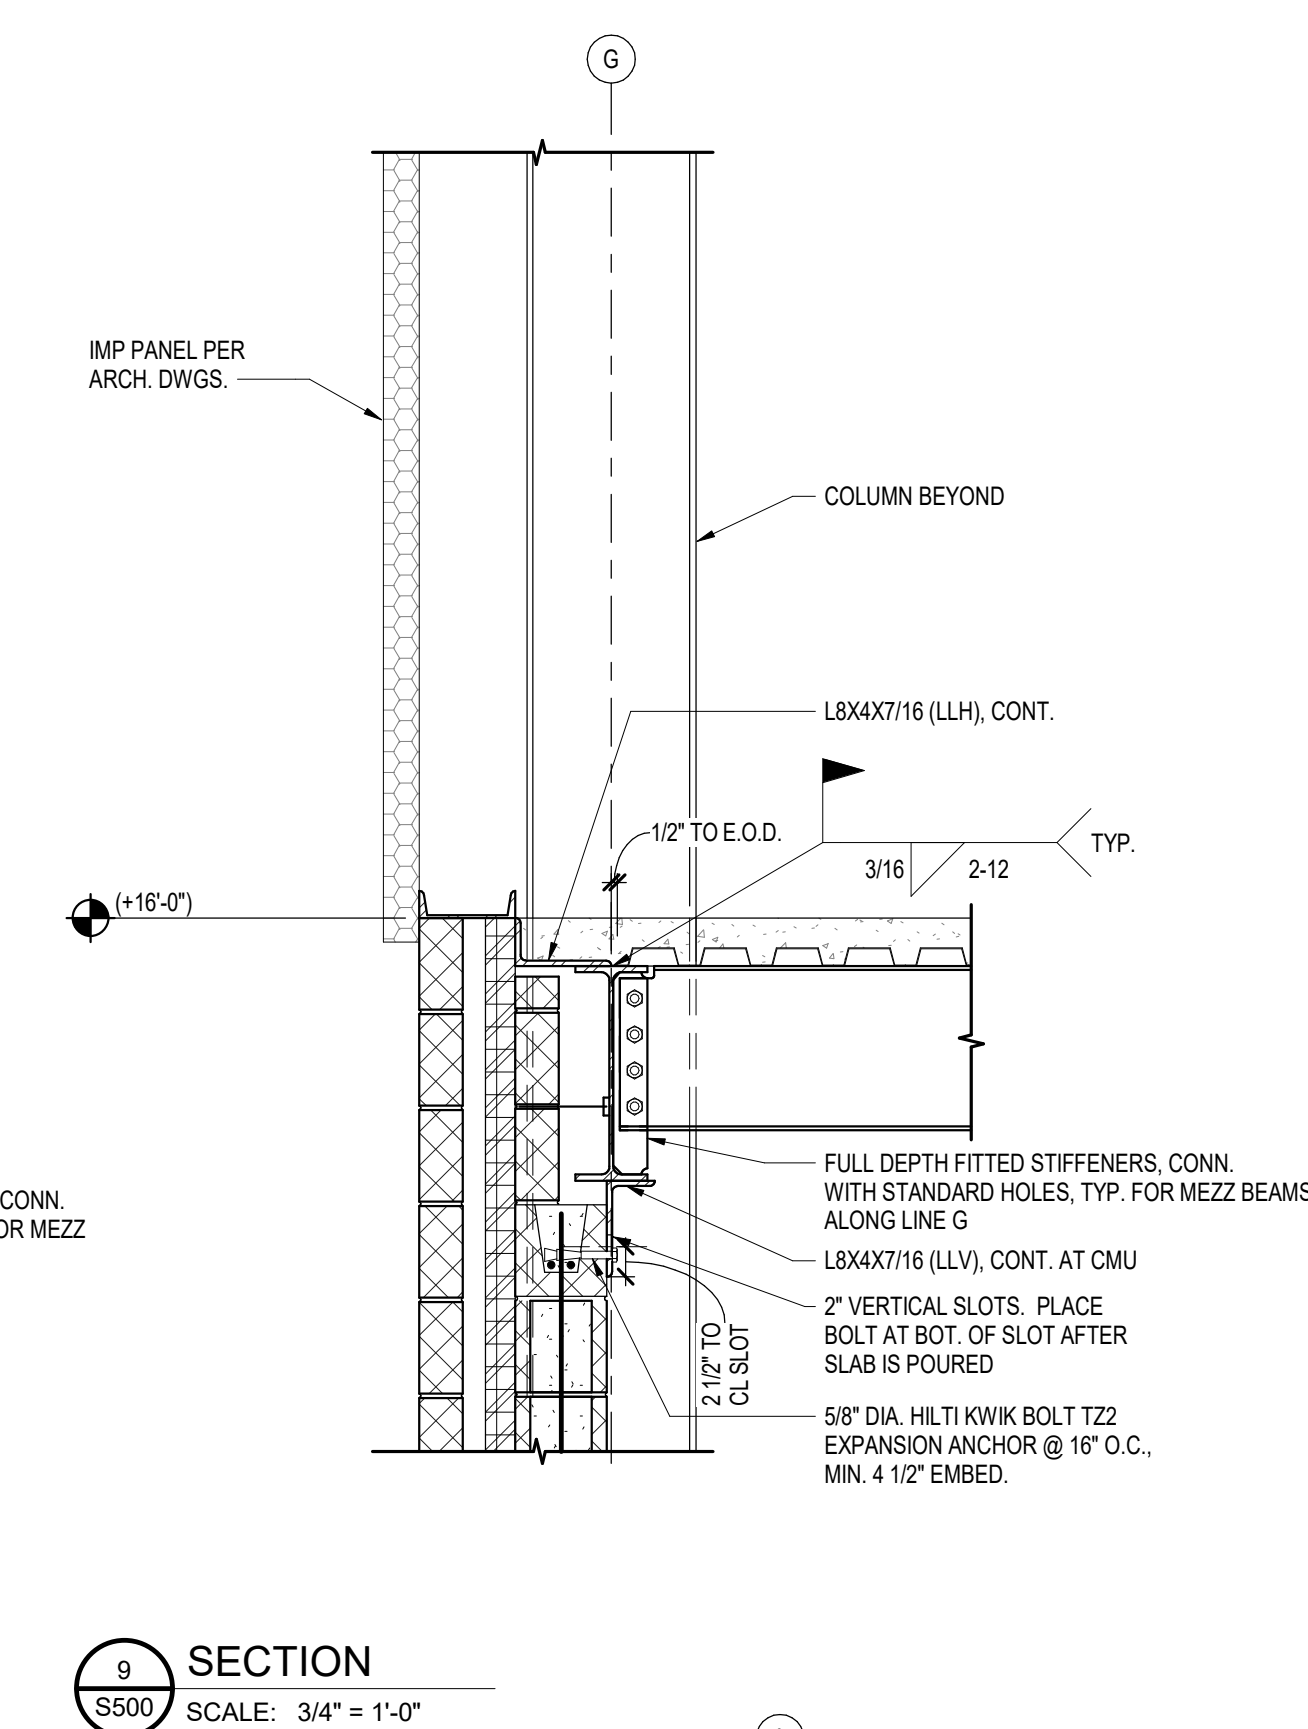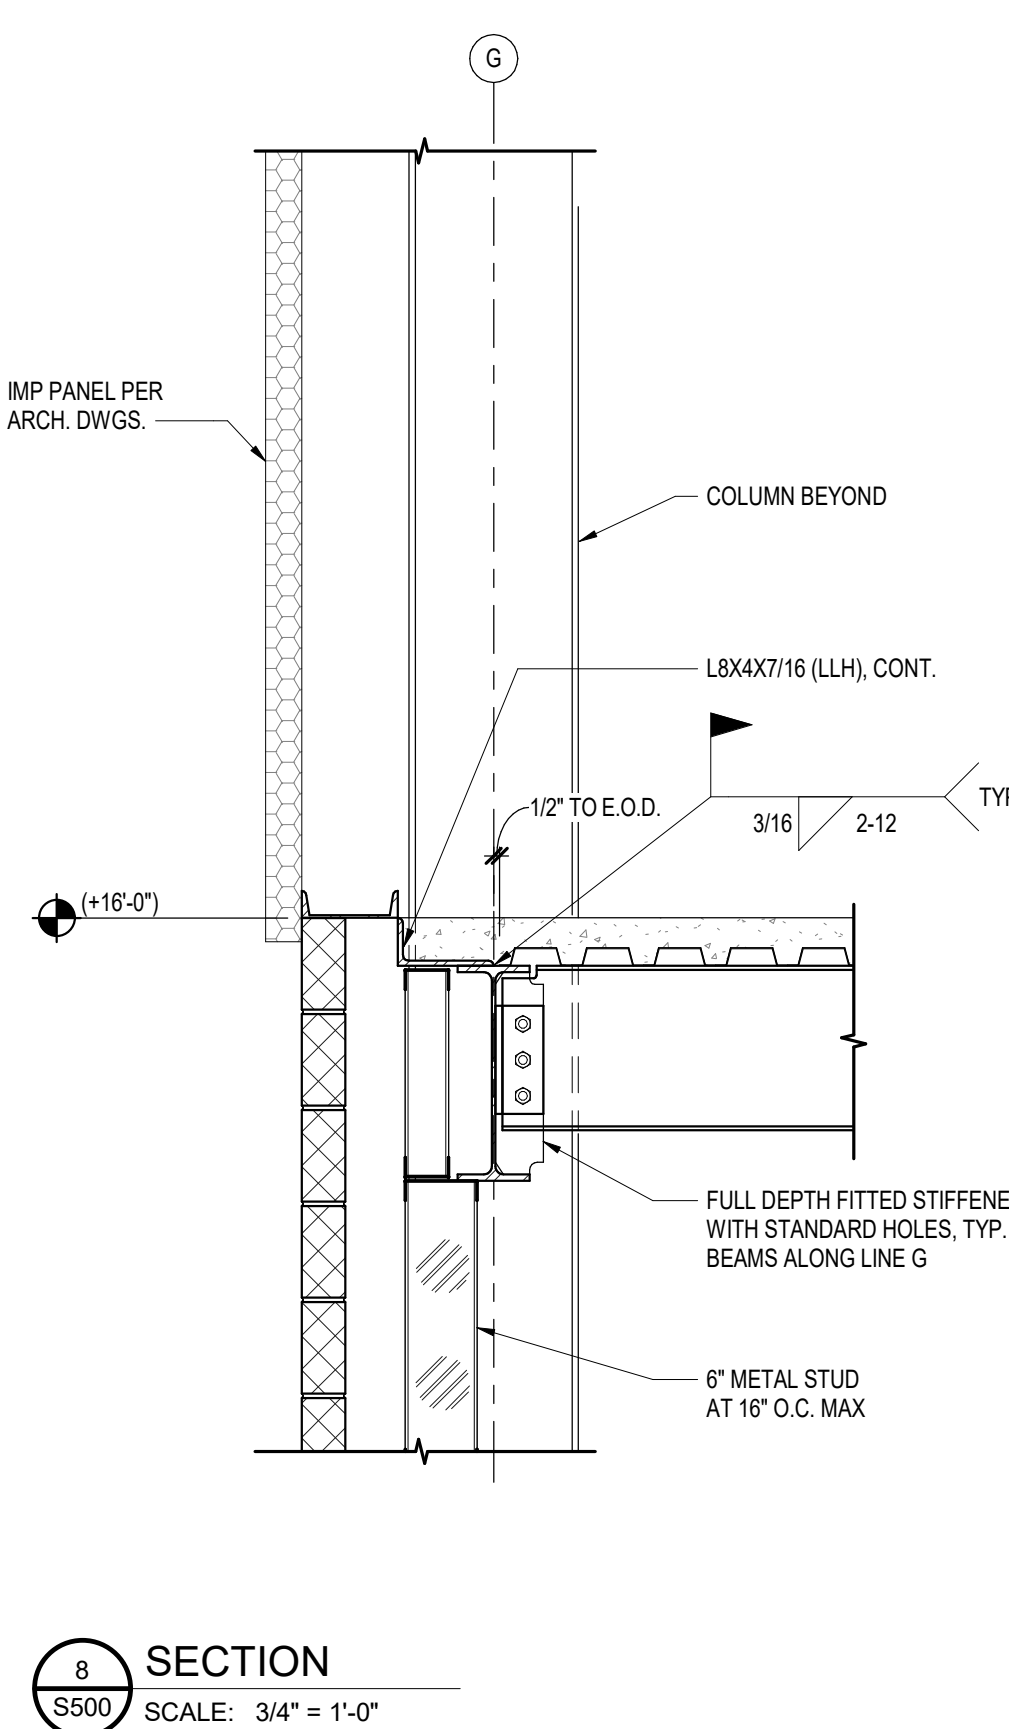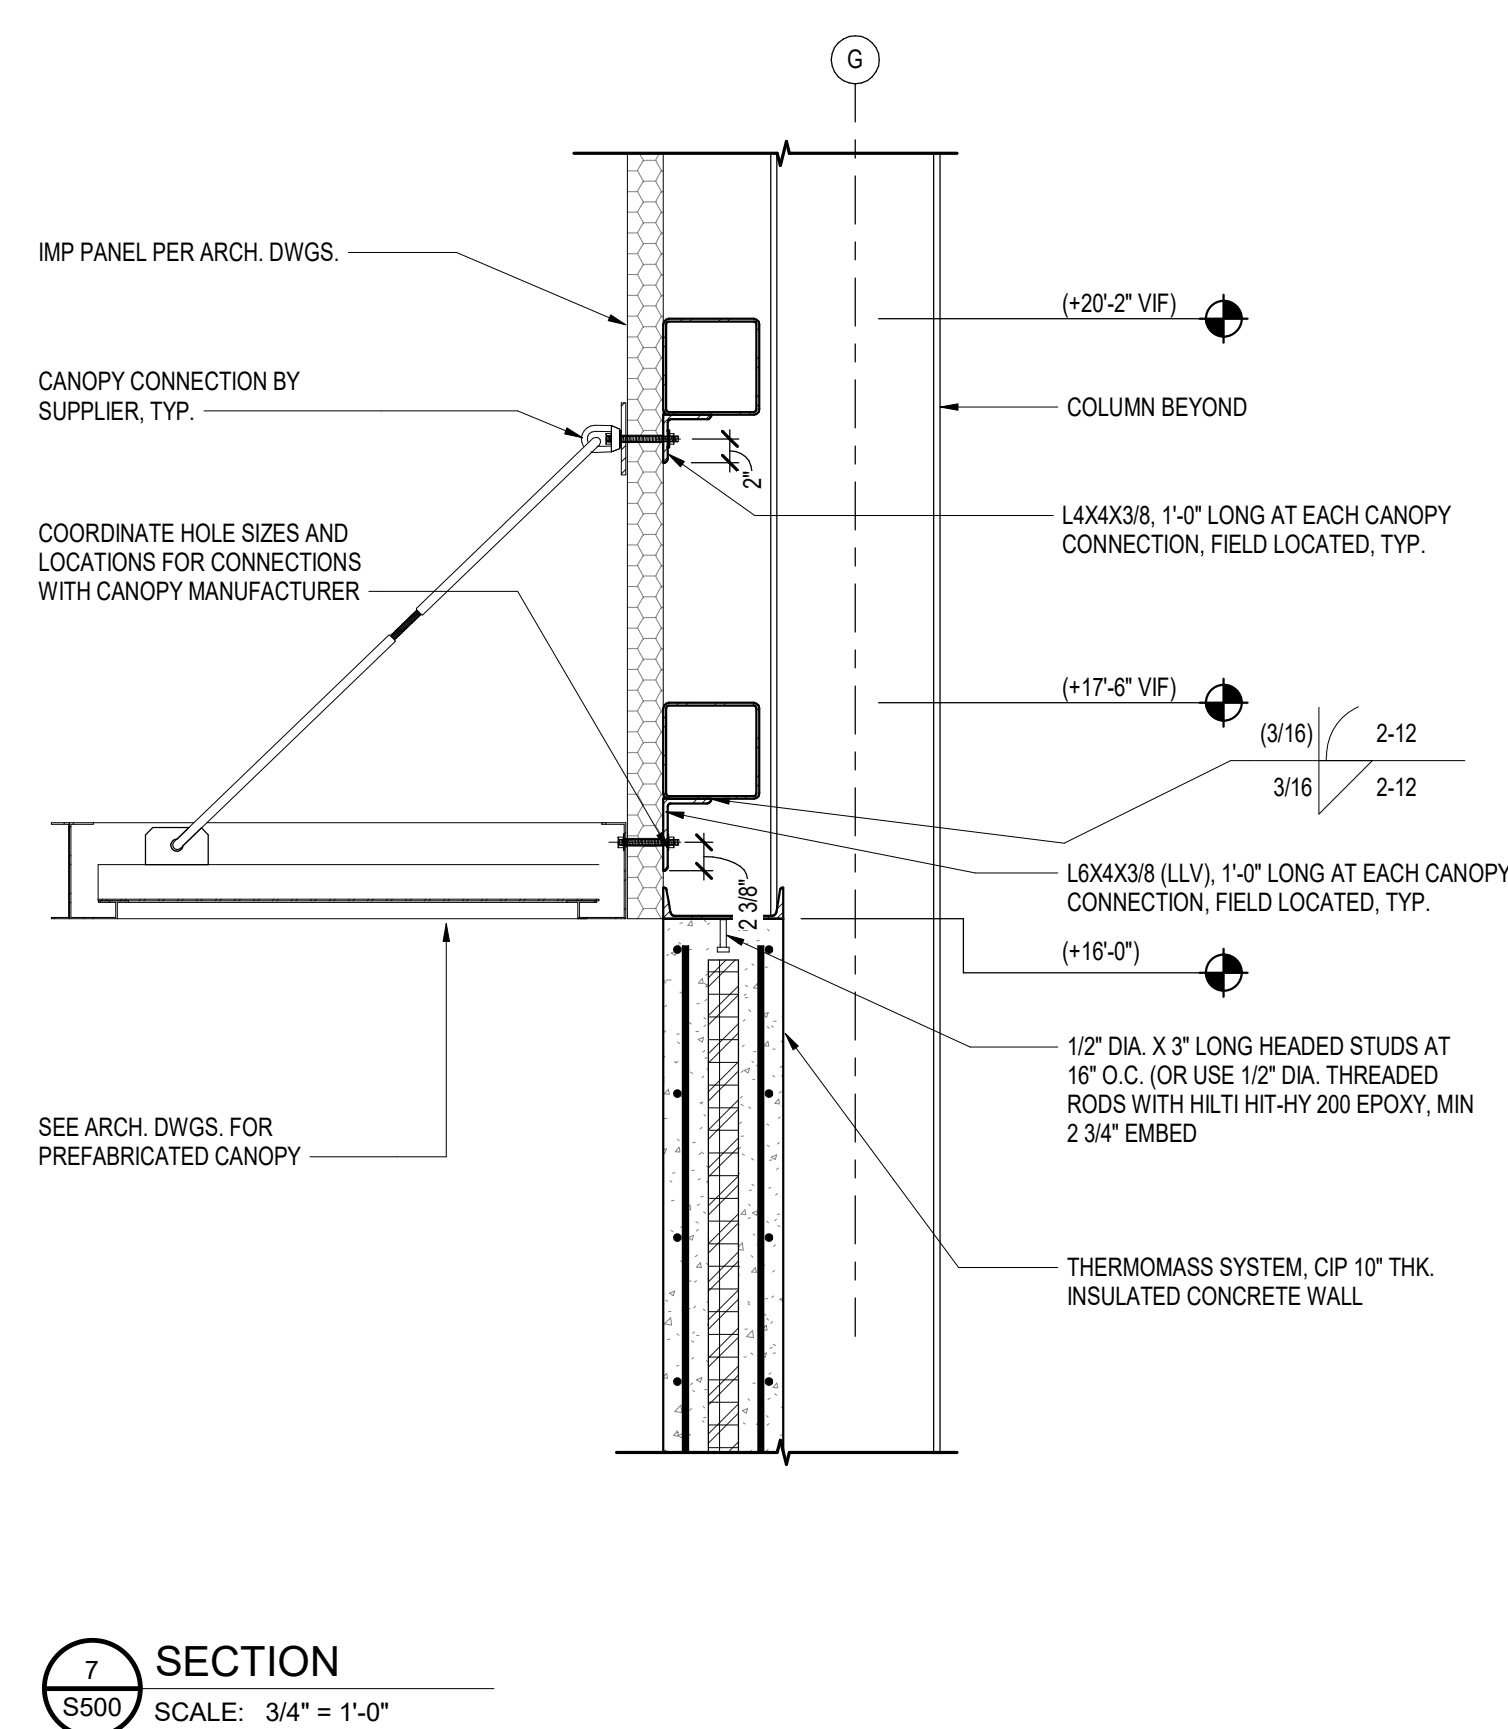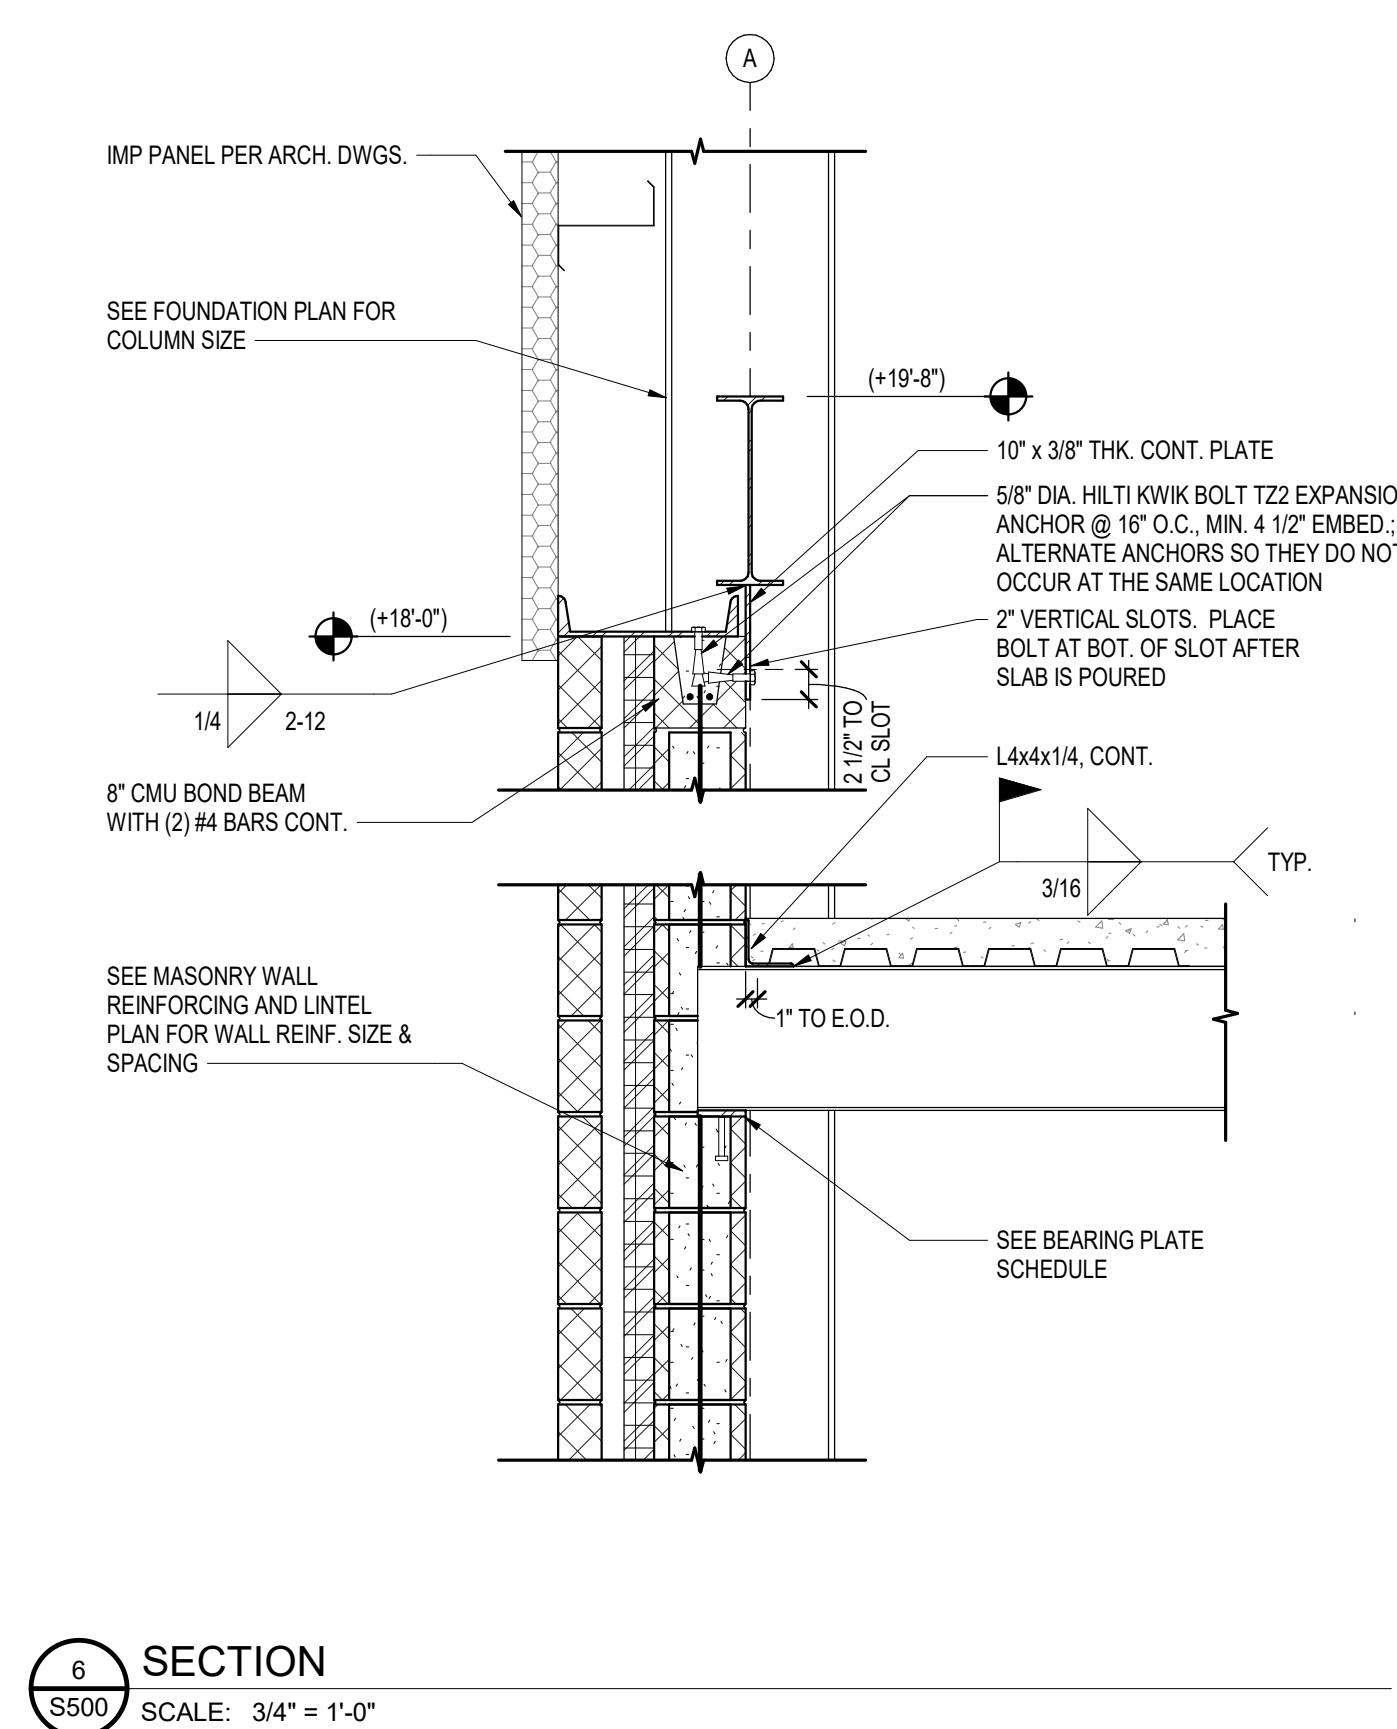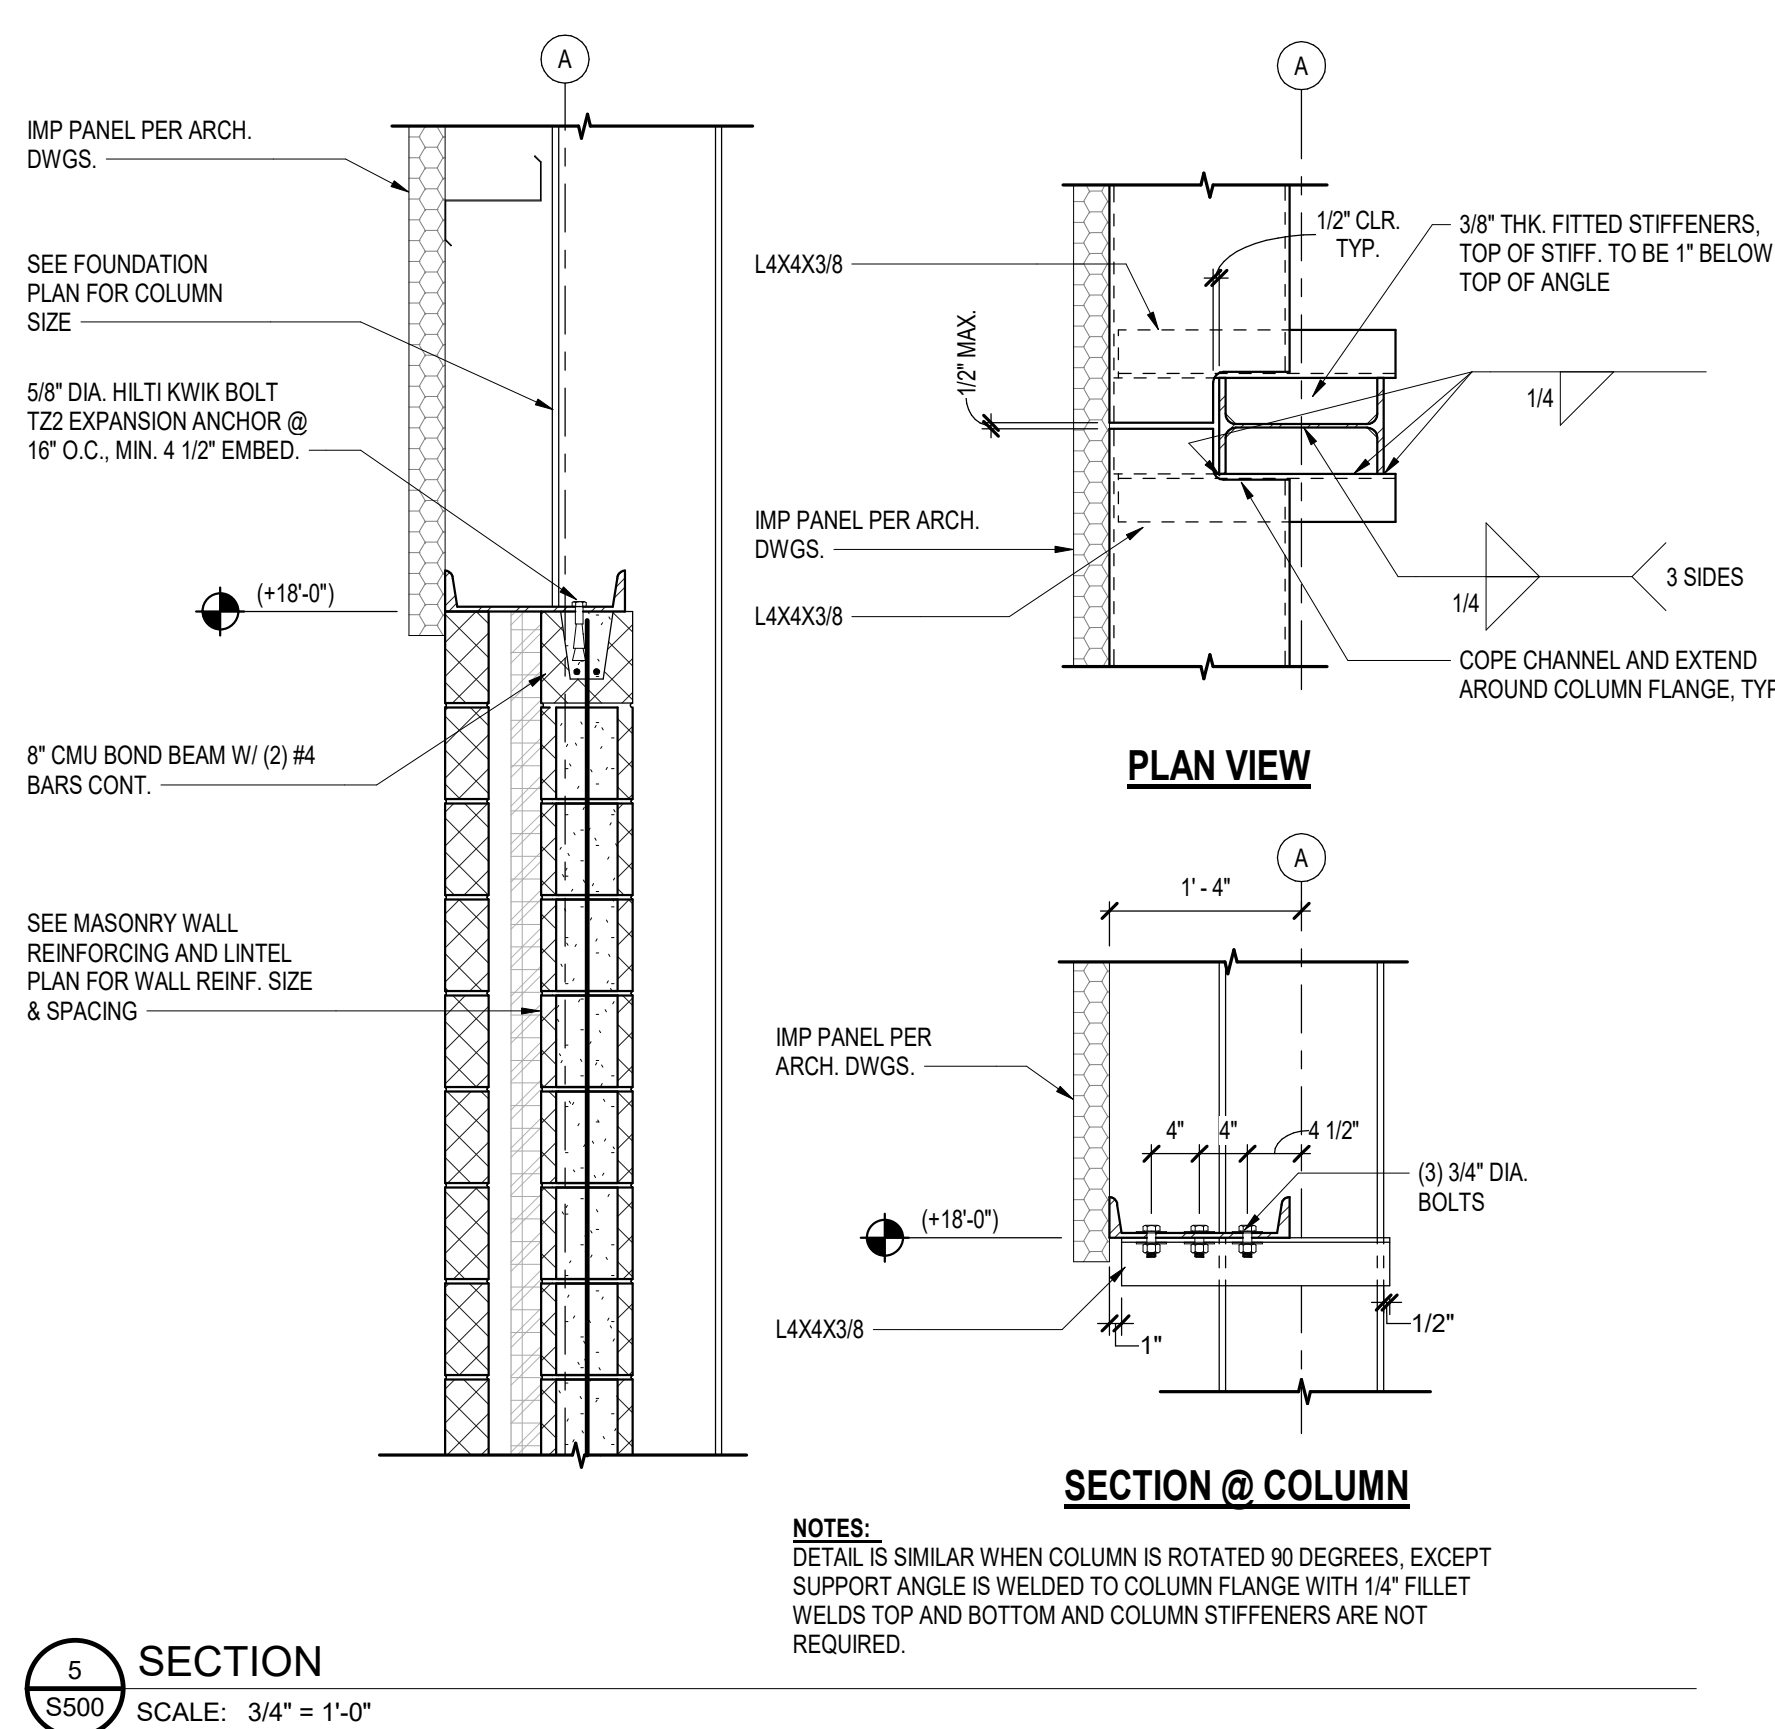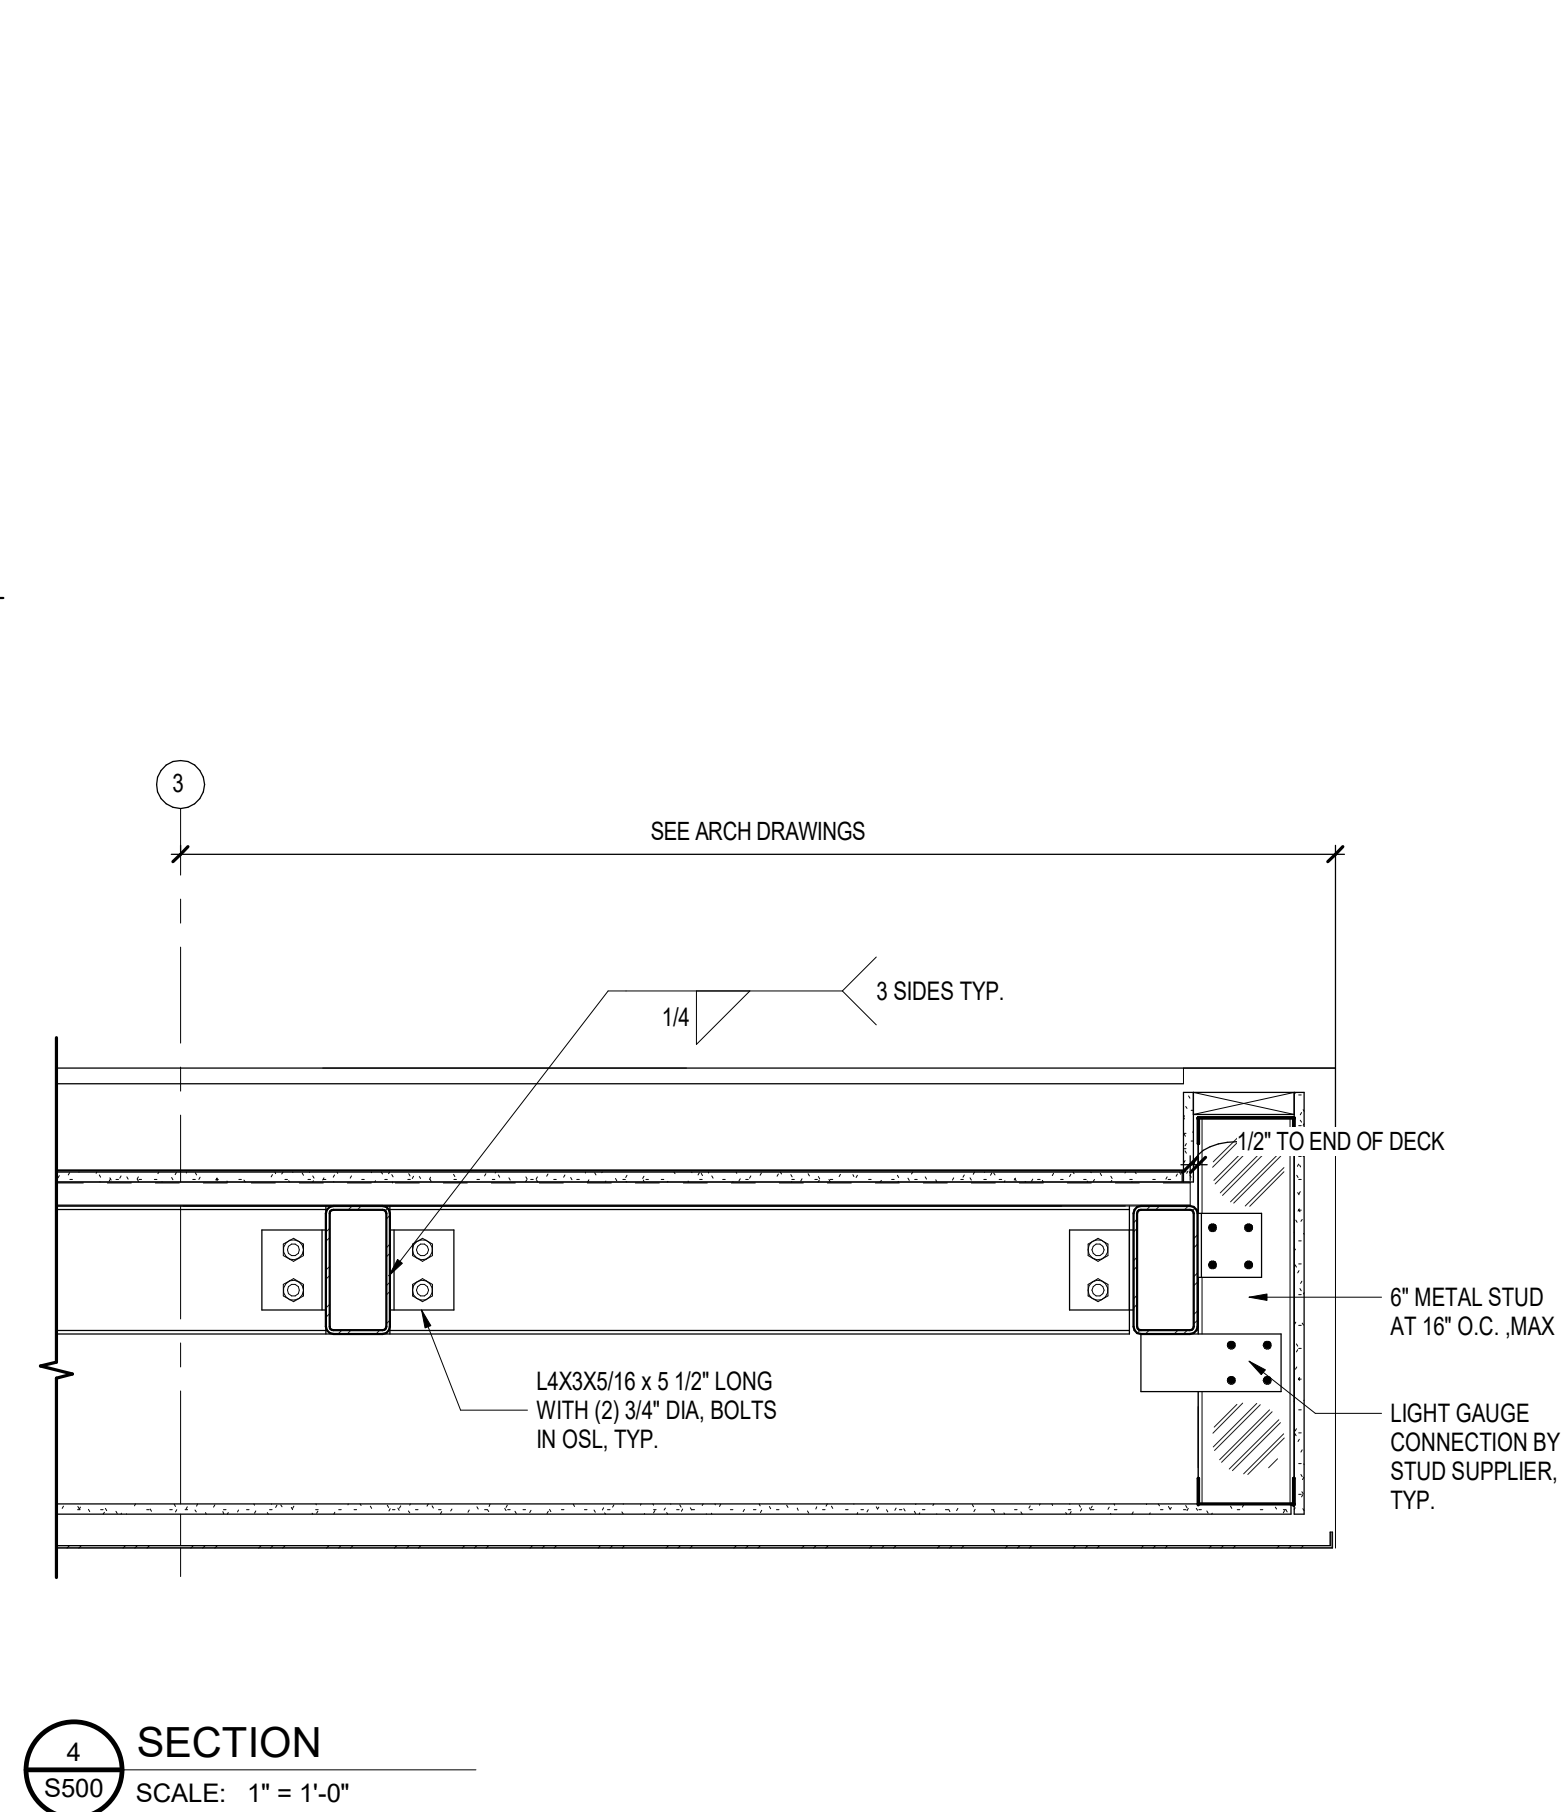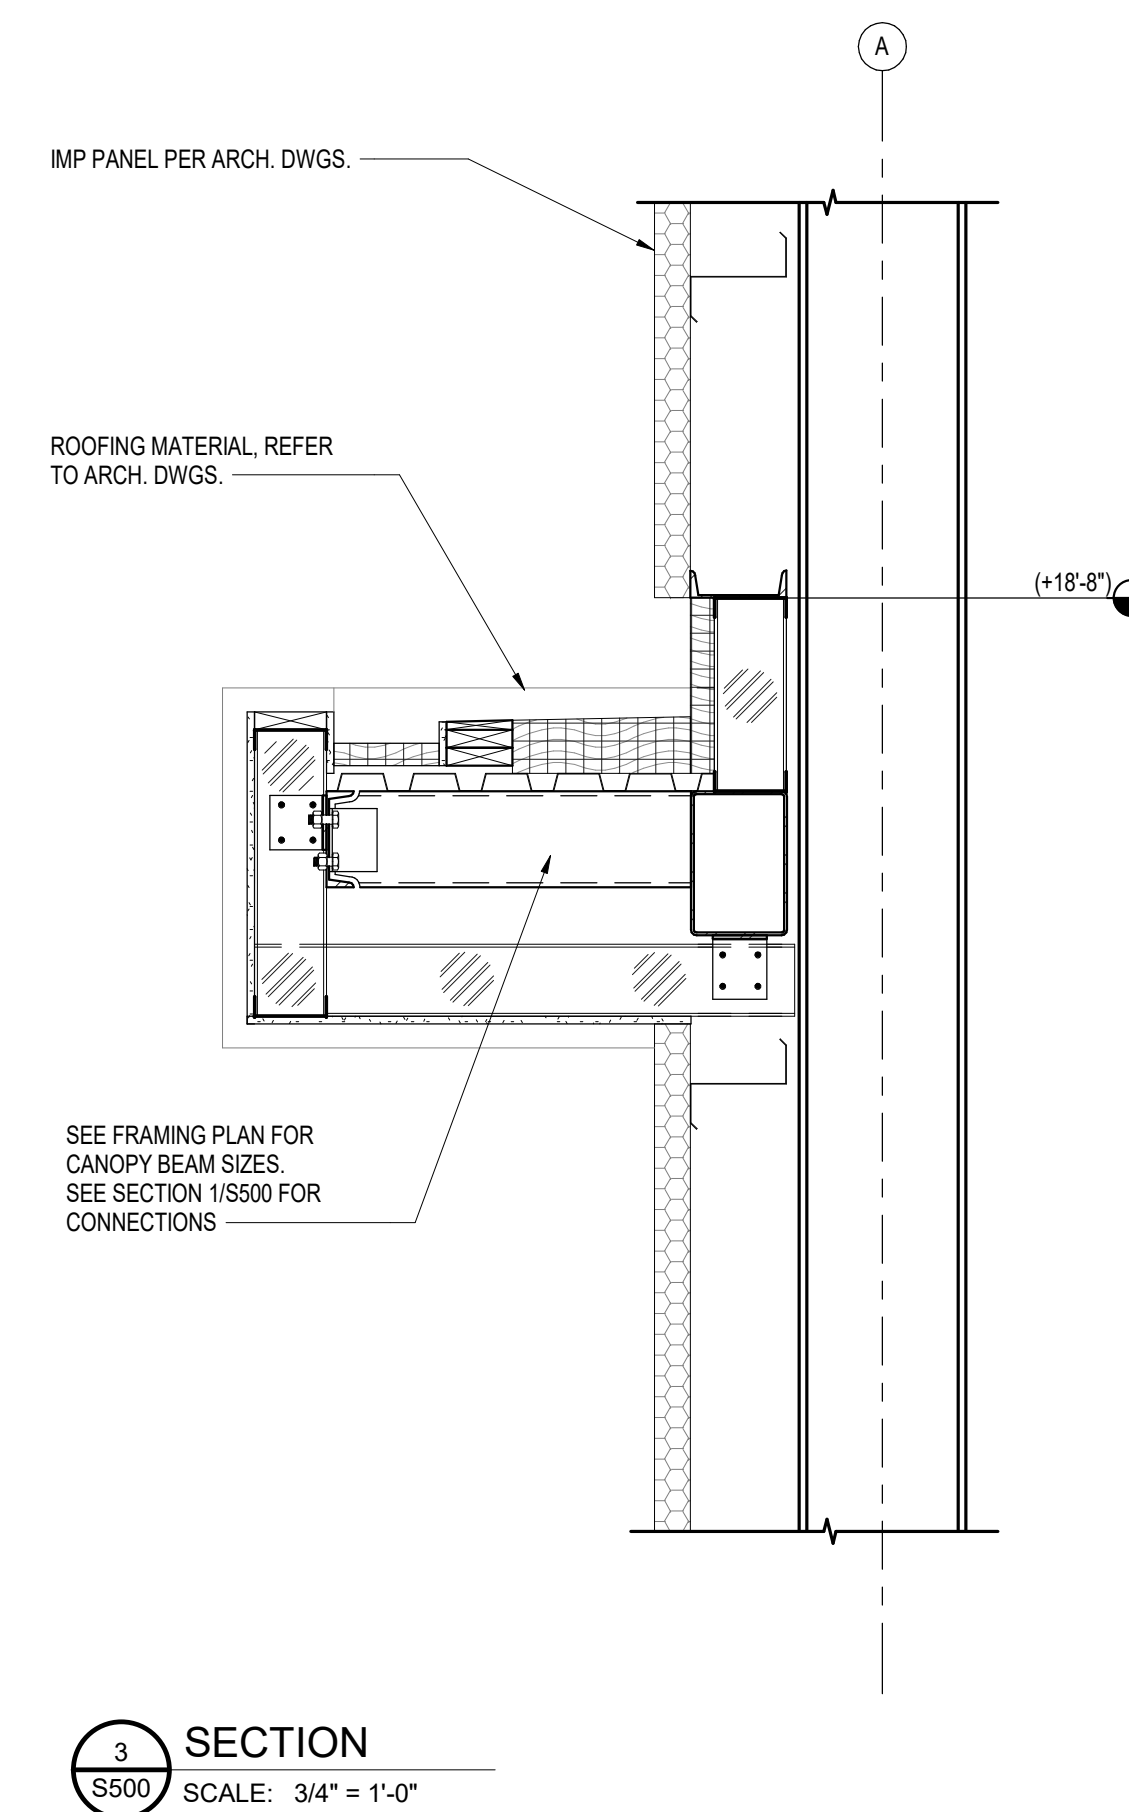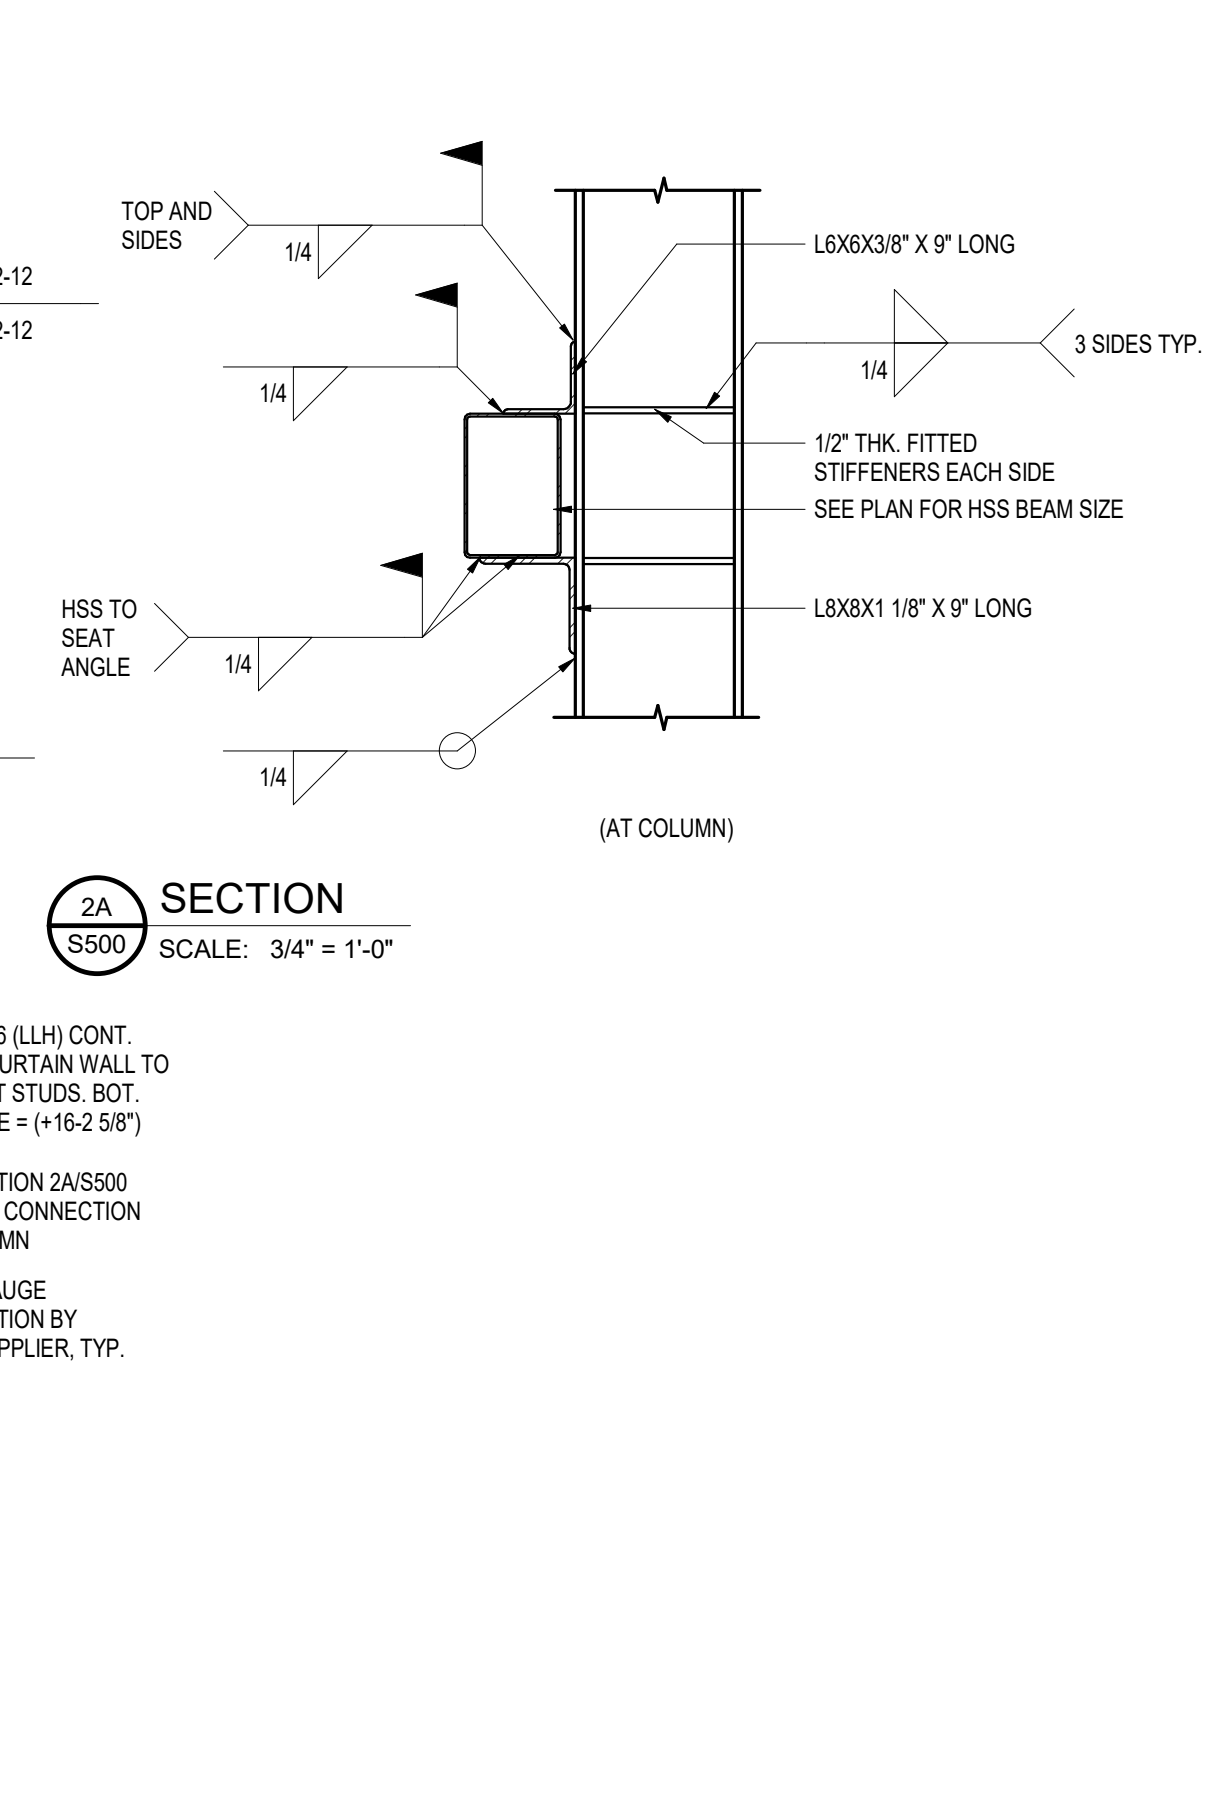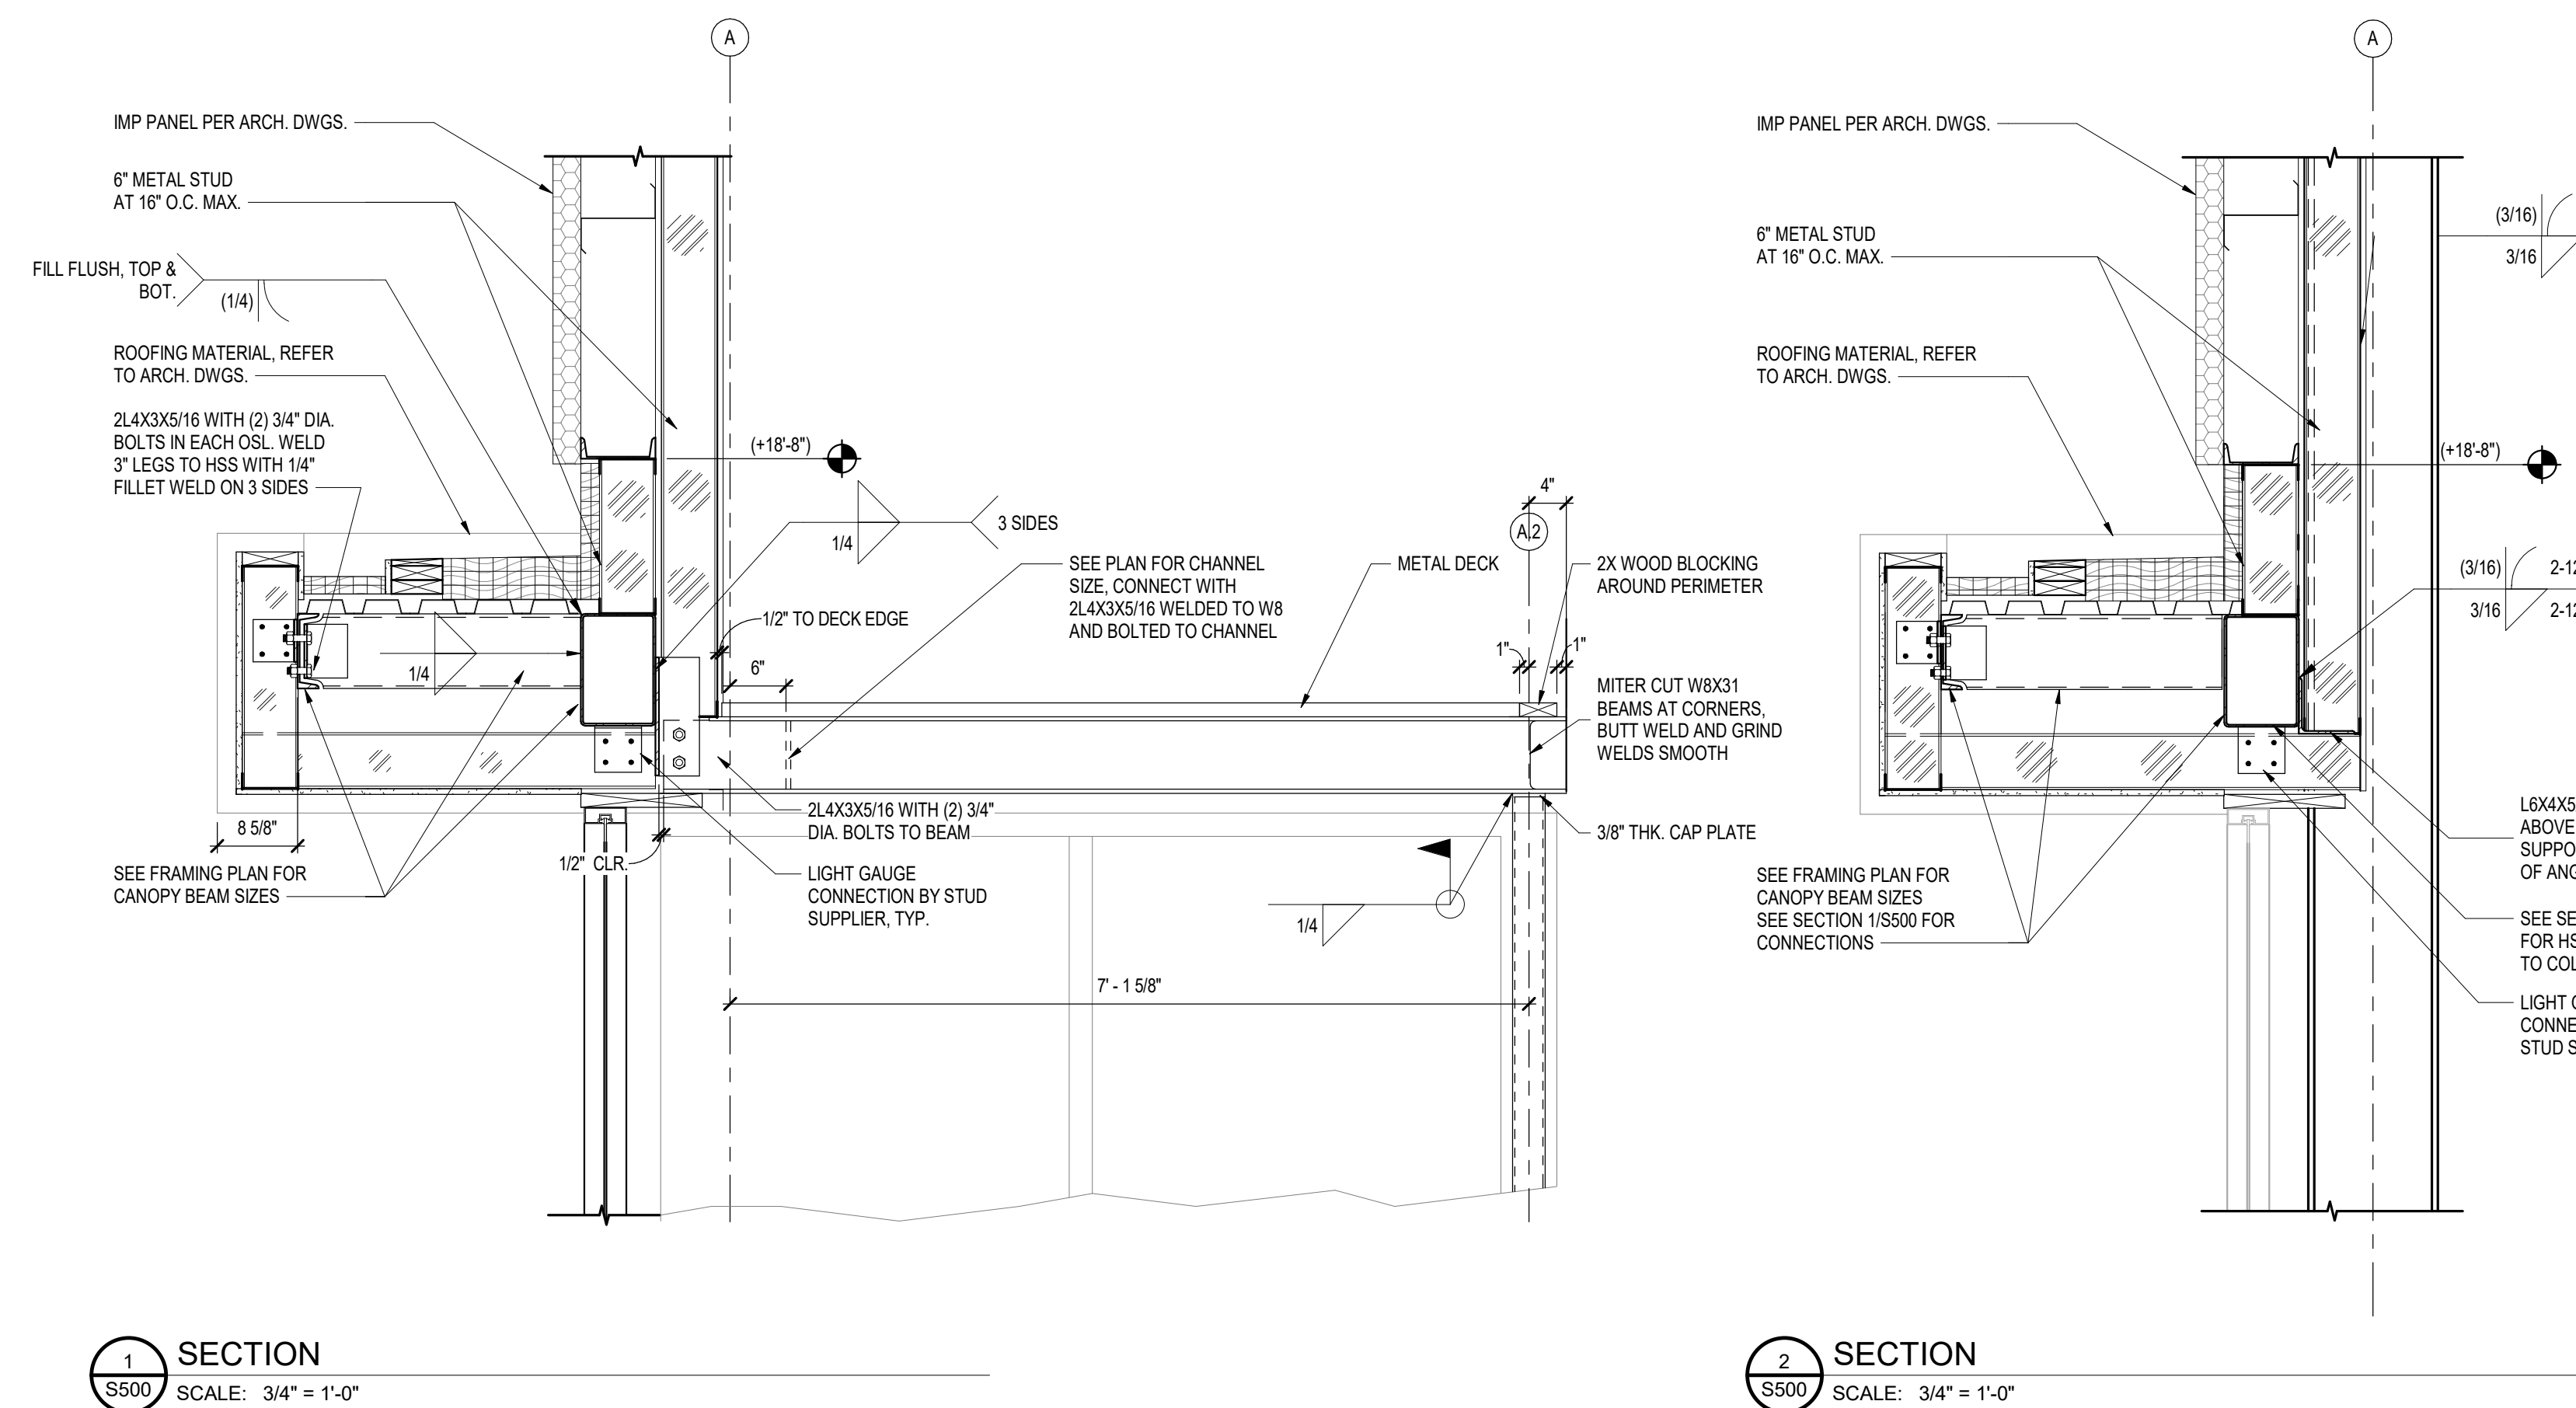


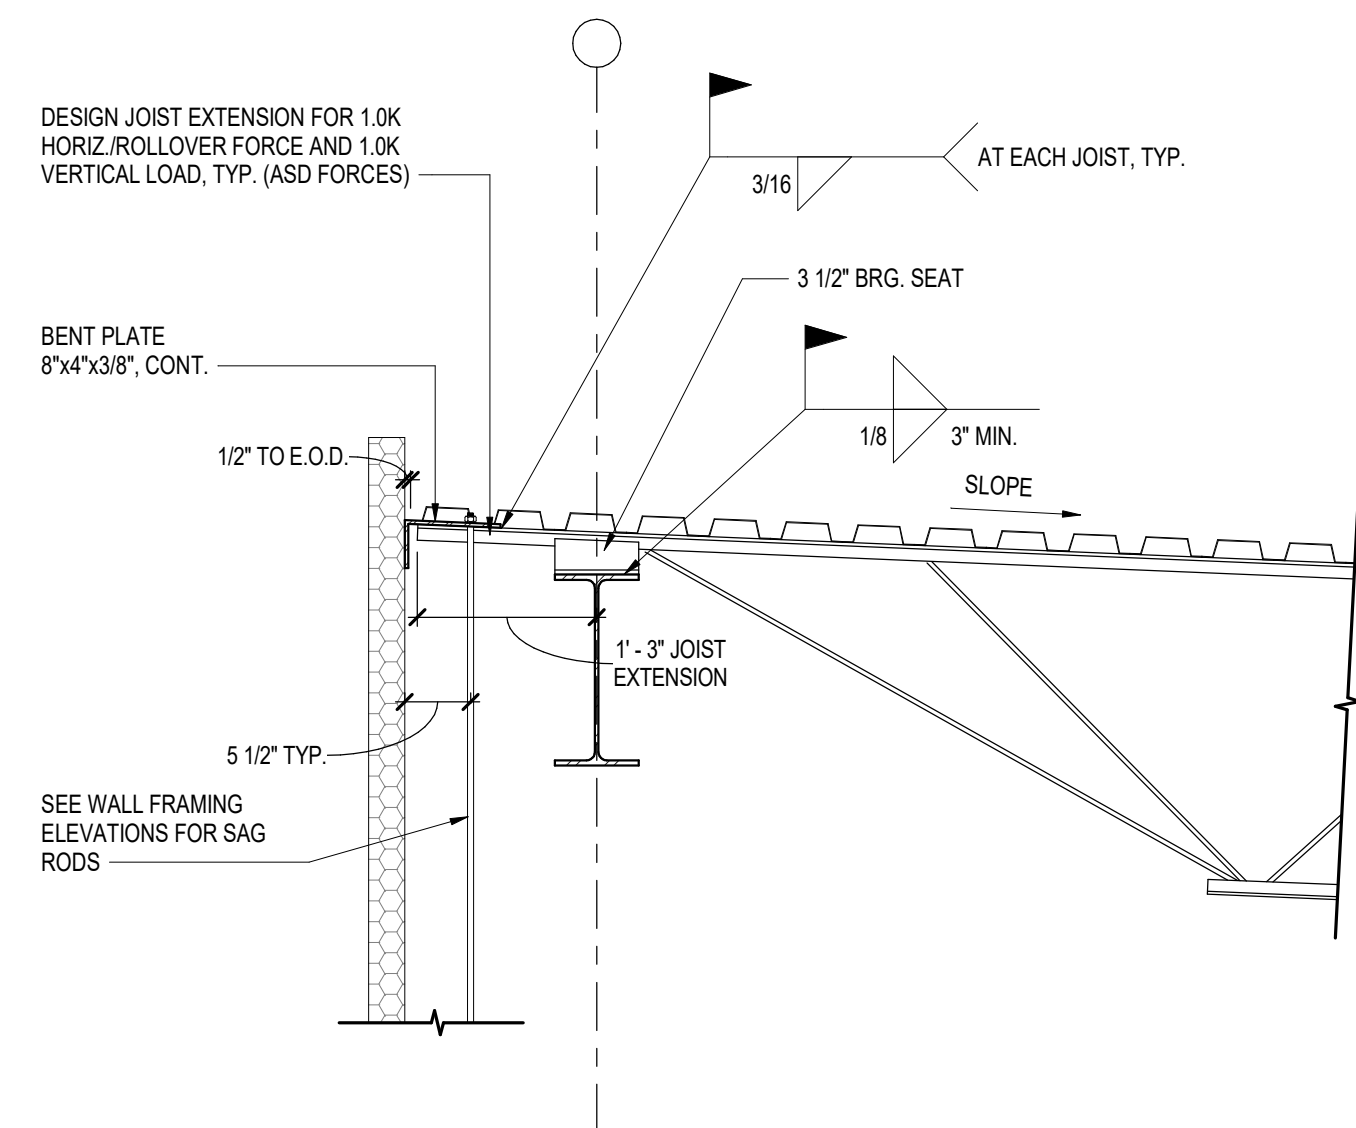


1 SECTION
S502 SCALE: 3/4" = 1'-0"

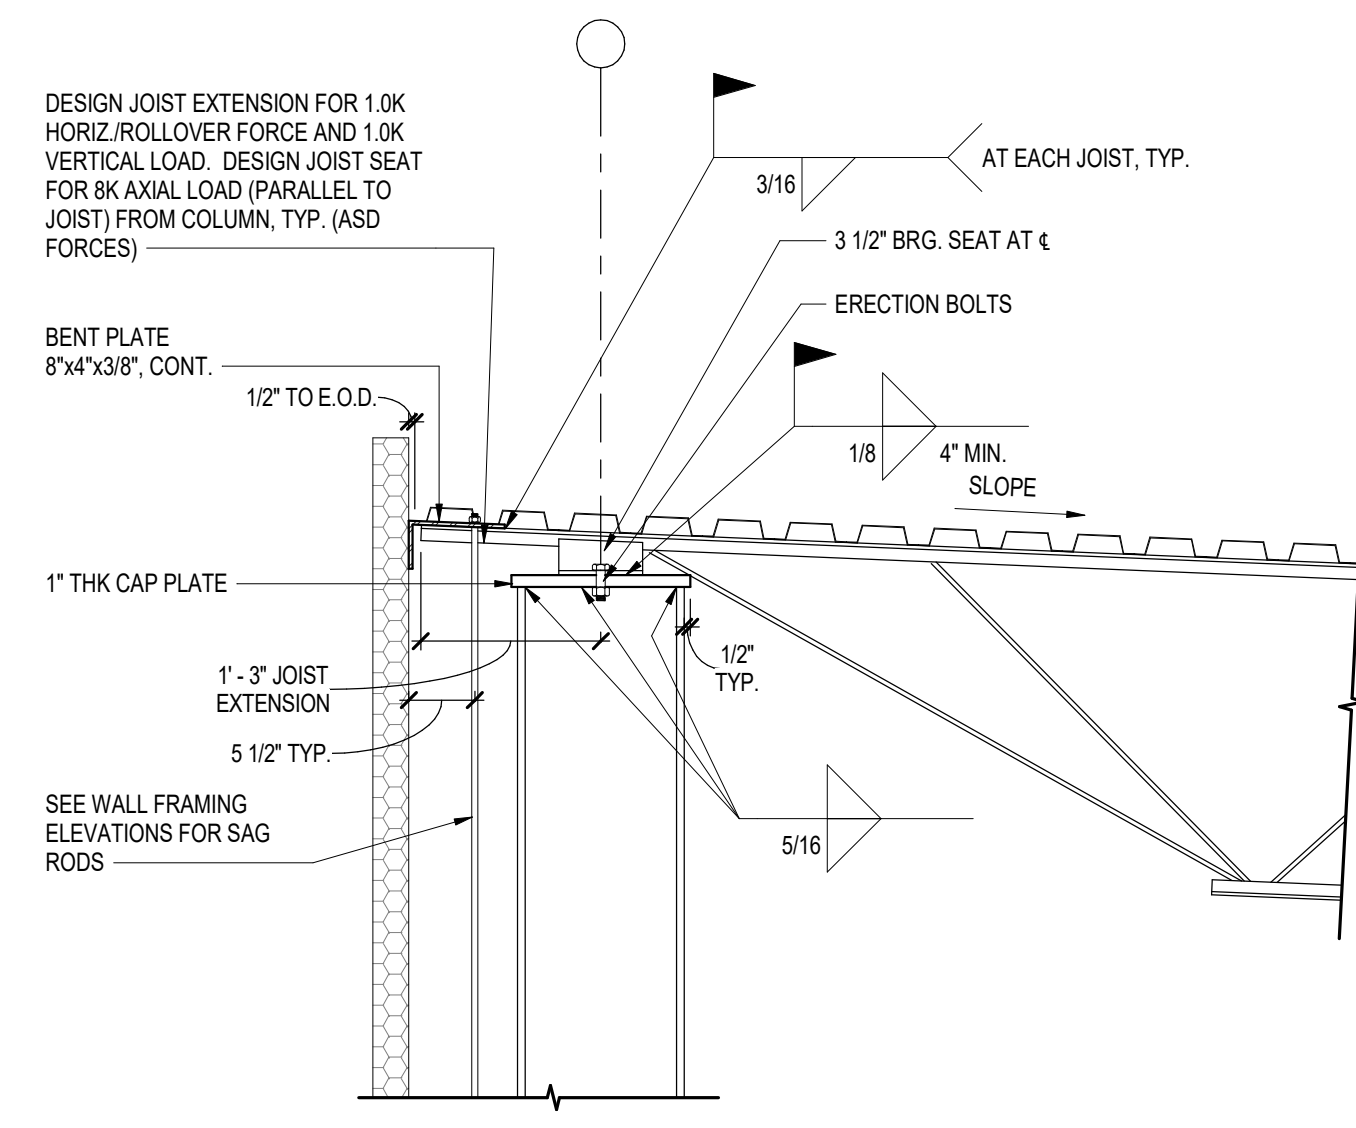


2 SECTION
S502 SCALE: 3/4" = 1'-0"

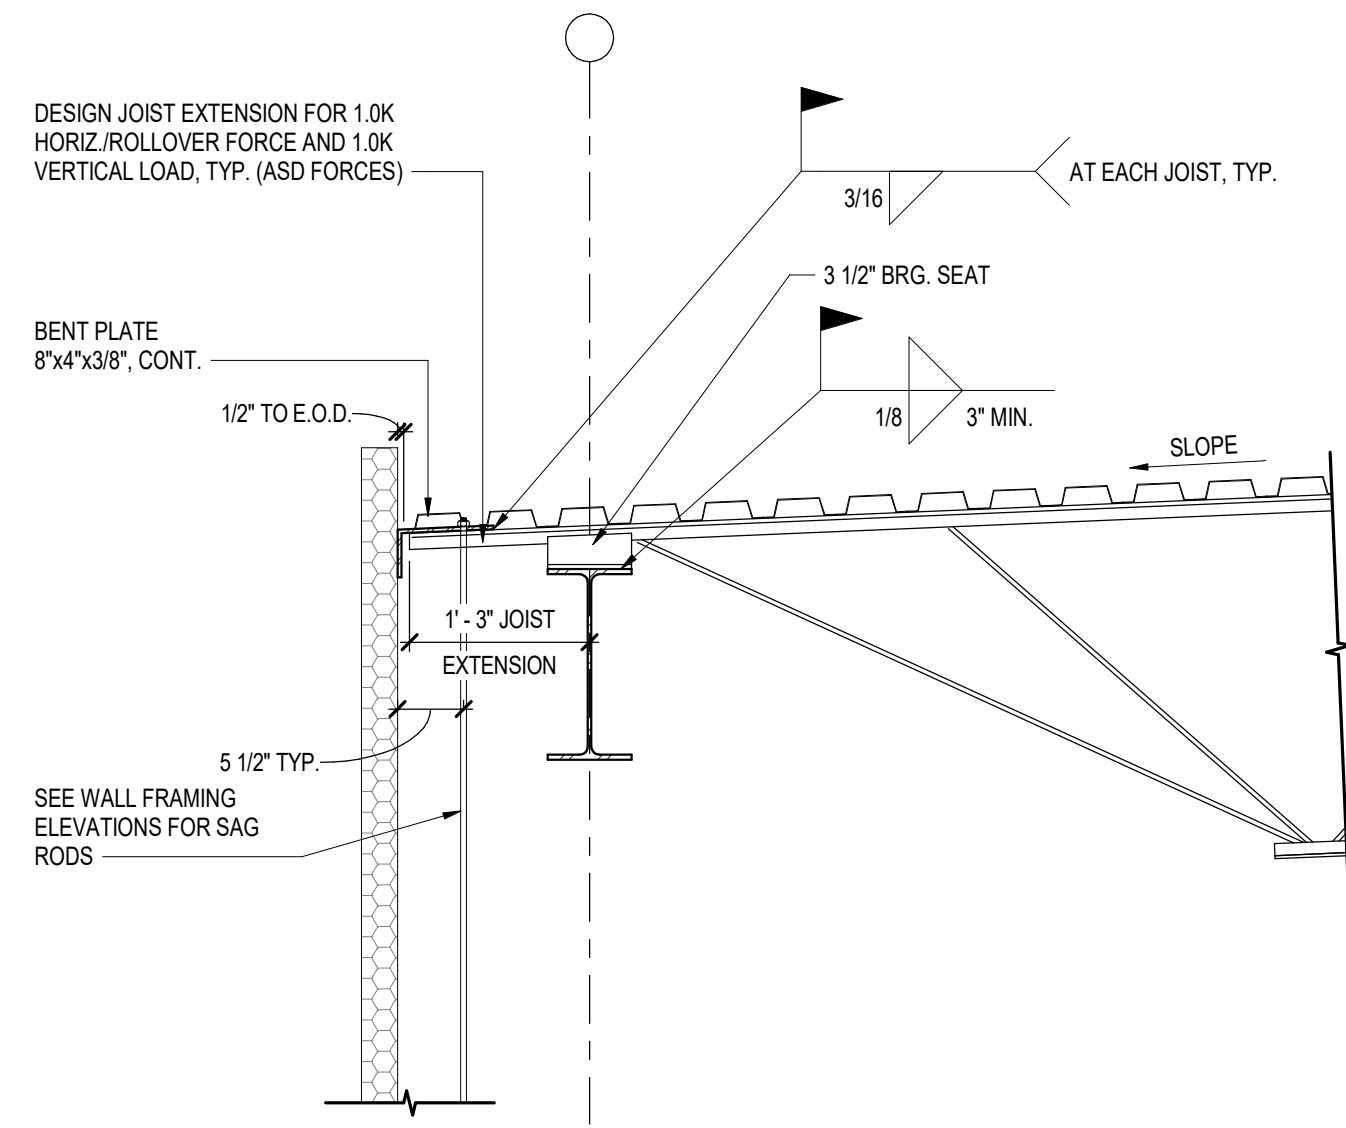


SECTION
SCALE: 3/4" = 1'-0"

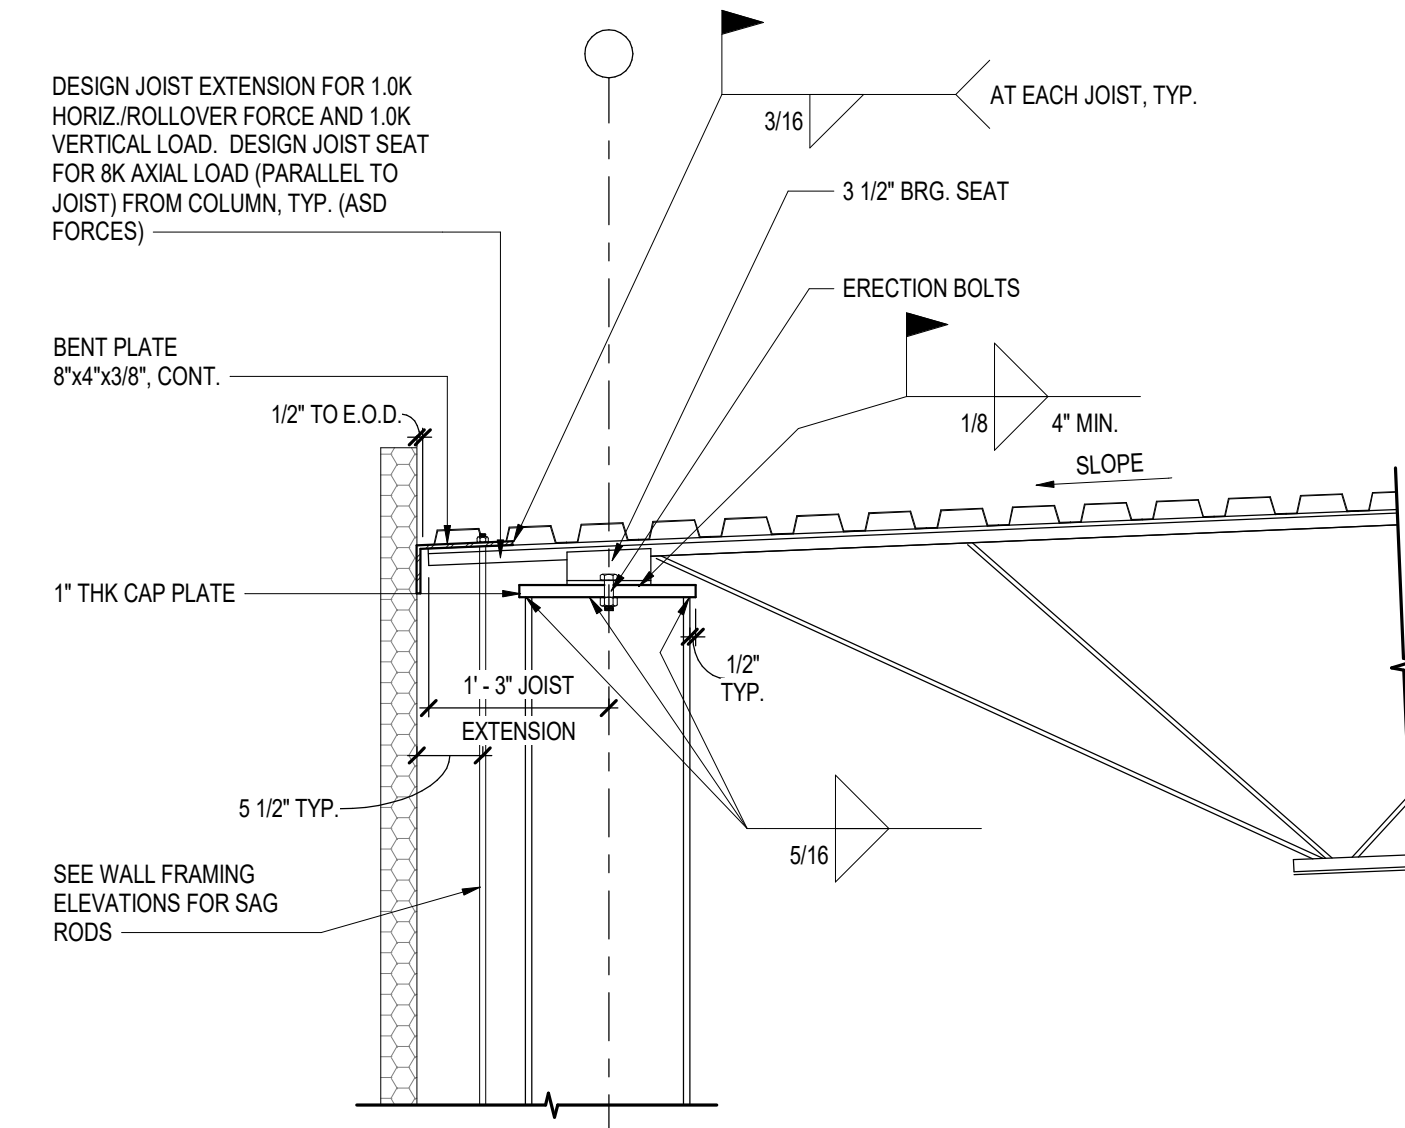


4 SECTION
S502 SCALE: 3/4" = 1'-0"

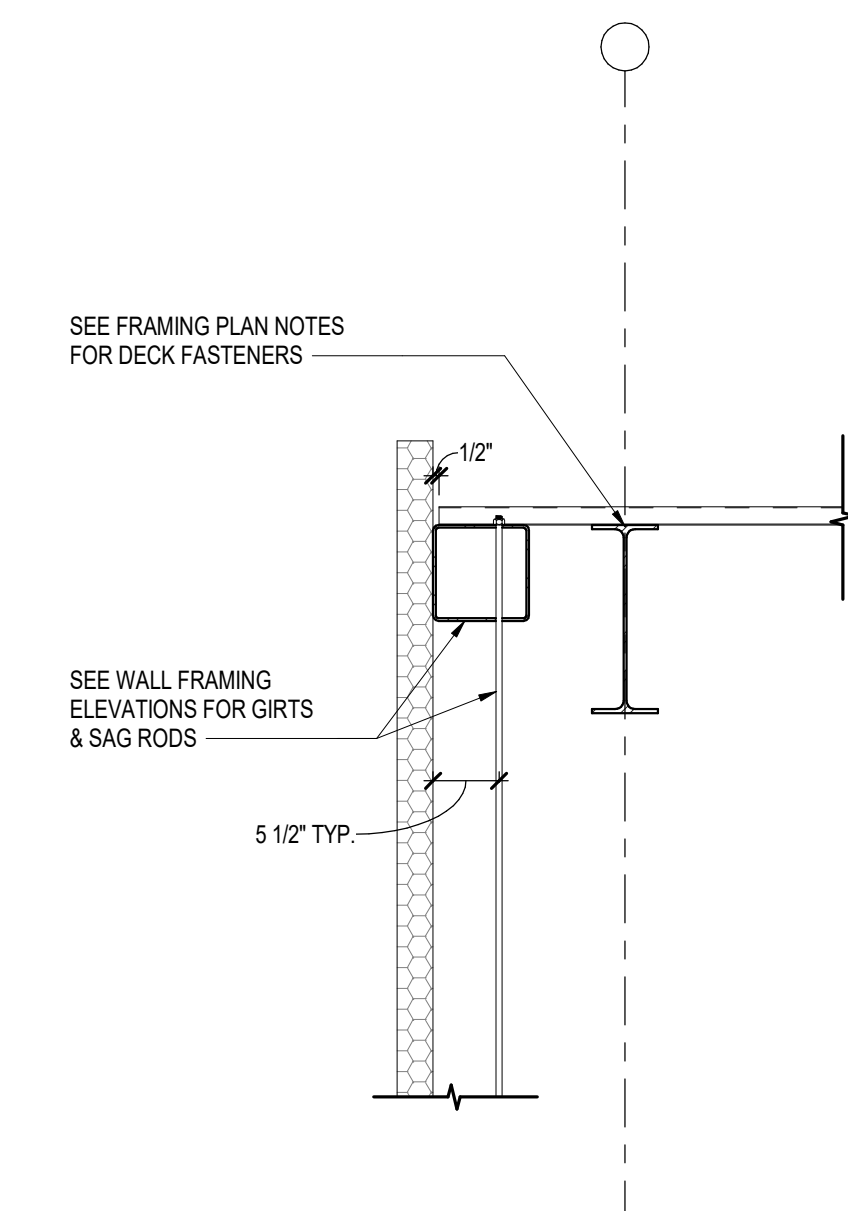


5 SECTION
S502 SCALE: 3/4" = 1'-0"

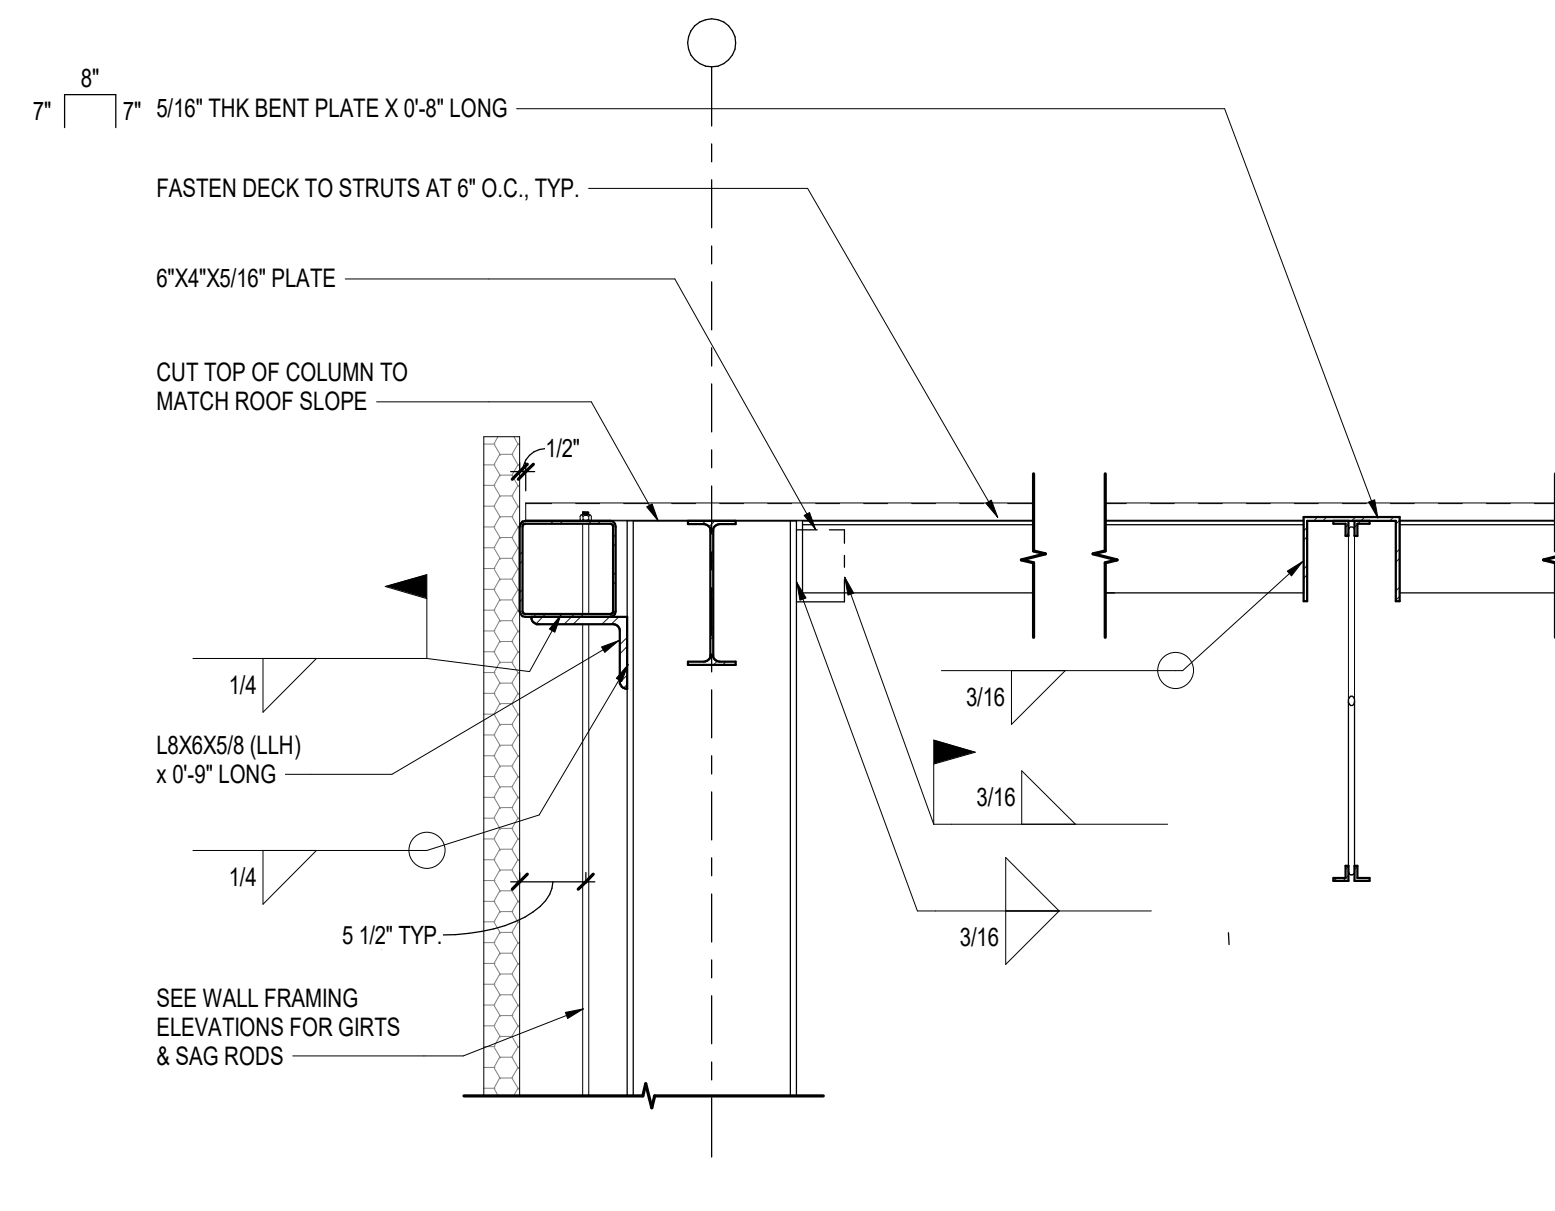


6 SECTION
S502 SCALE: 3/4" = 1'-0"

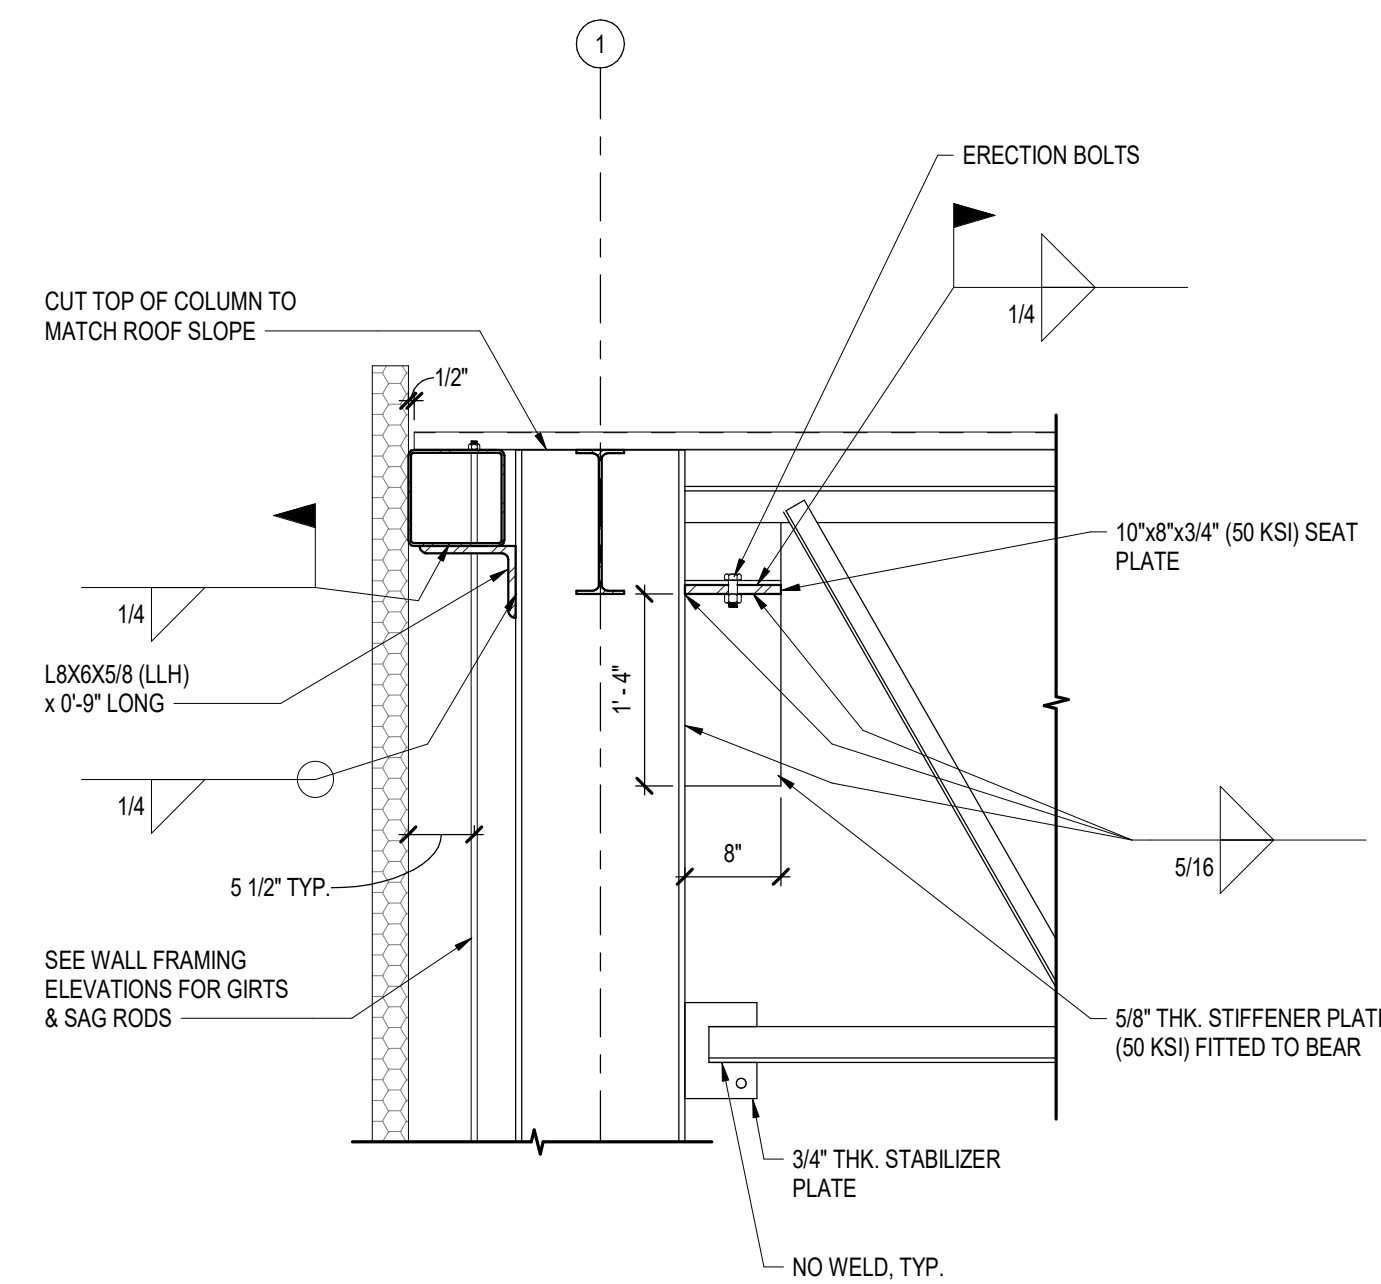


7 SECTION
S502 SCALE: 3/4" = 1'-0"

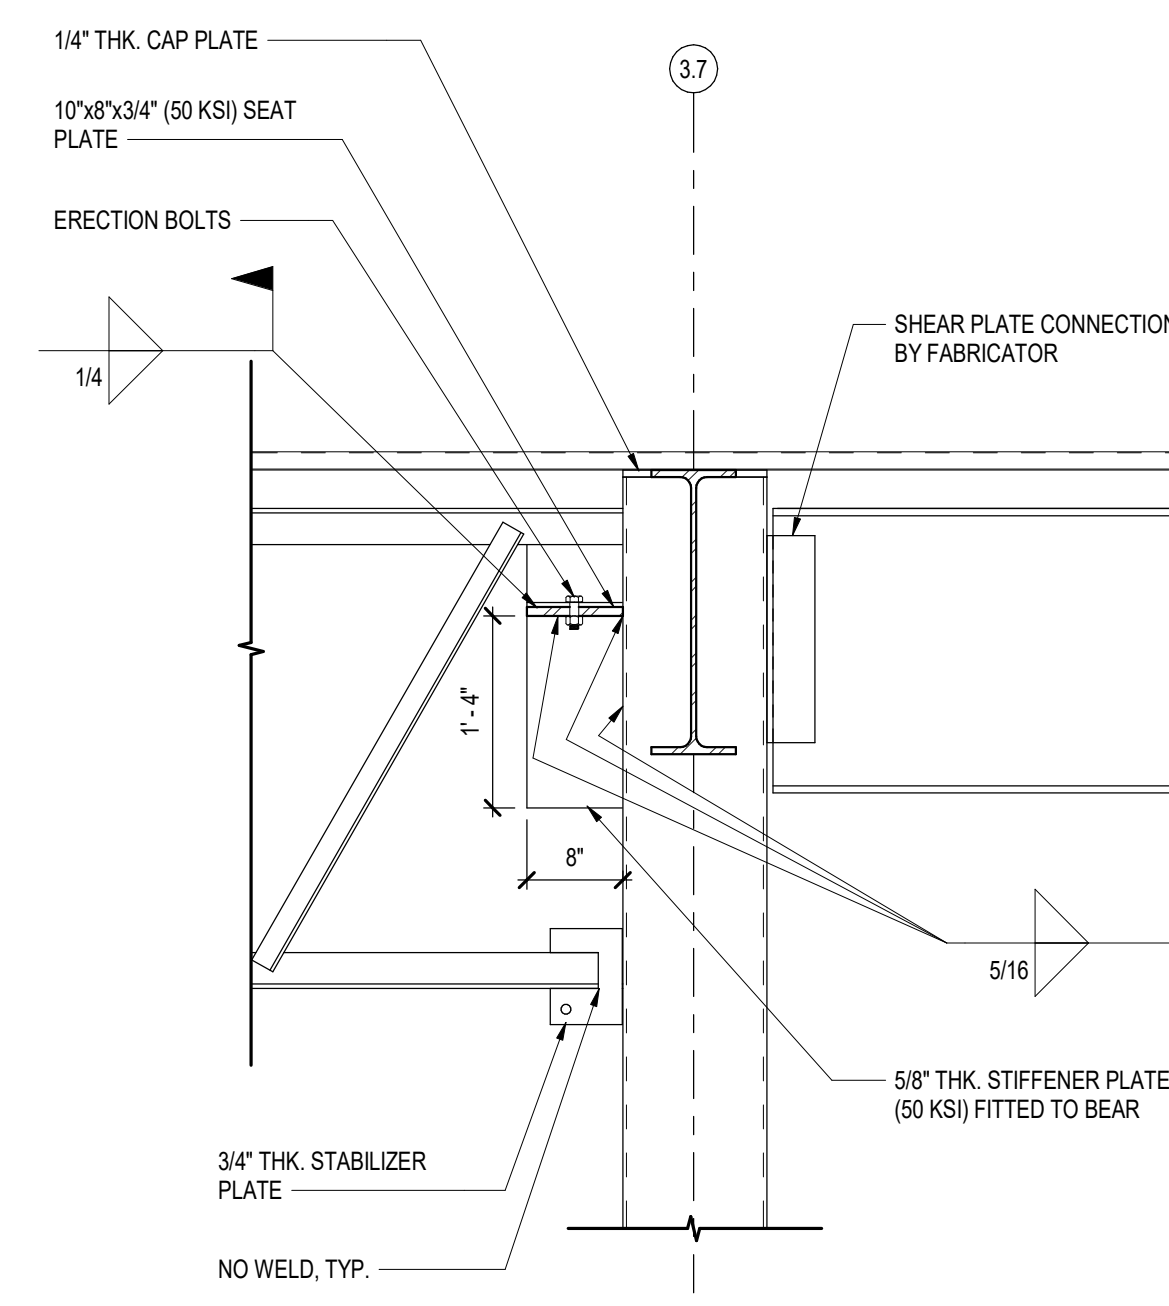

8 SECTION
S502 SCALE: 3/4" = 1'-0"

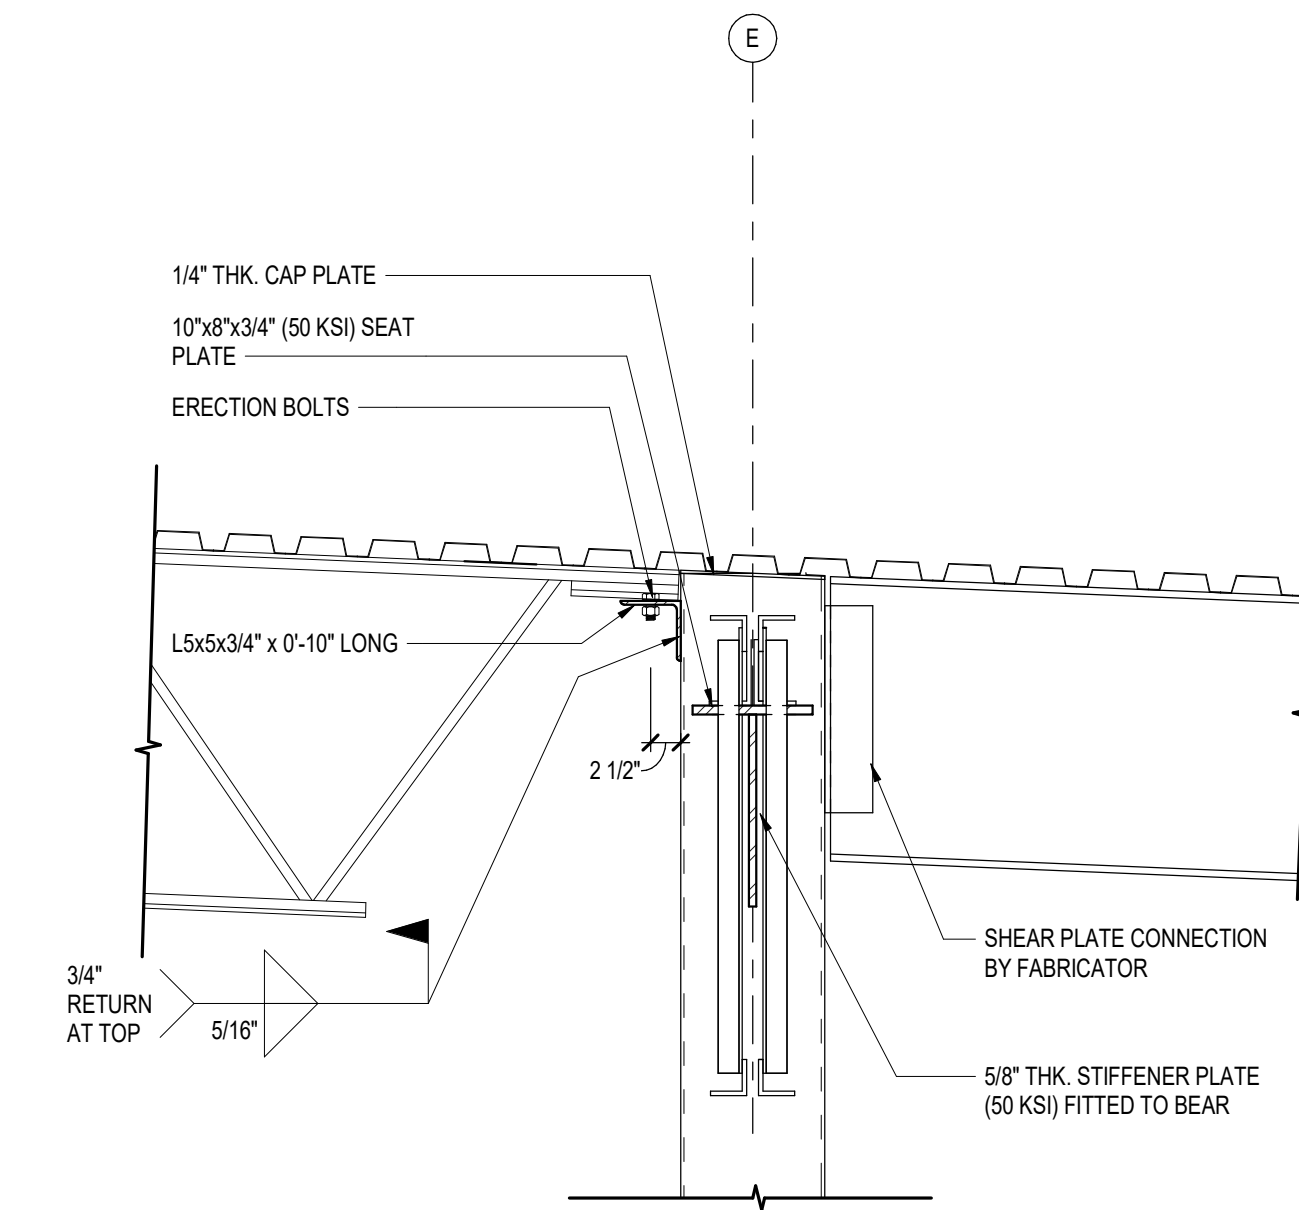

9 SECTION
S502 SCALE: 3/4" = 1'-0"

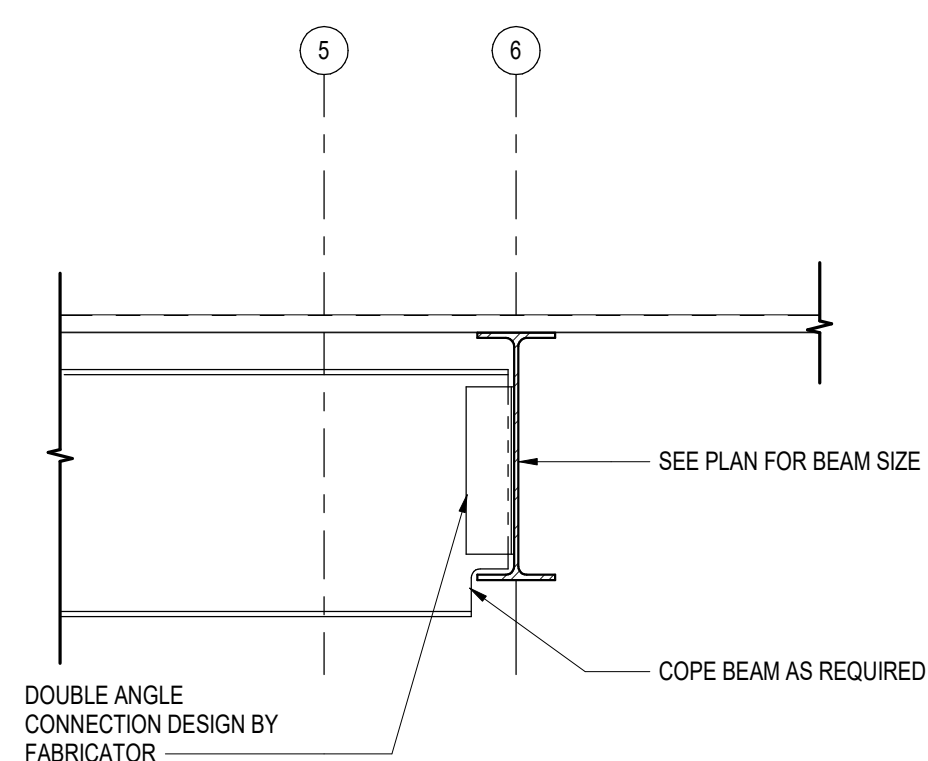

10 SECTION
S502 SCALE: 3/4" = 1'-0"